# Appendix L – Waters Technical Report


Job No. 100512, Walnut Ridge – Missouri State Line (Future I-57) P.E.



#### Prepared by Garver for the

Arkansas Department of Transportation
In cooperation with the Federal Hwy Administration

This report was funded in part by the Federal Hwy Administration, U.S. Department of Transportation. The views and opinions of the authors expressed herein do not necessarily state or reflect those of the U.S. Department of Transportation.

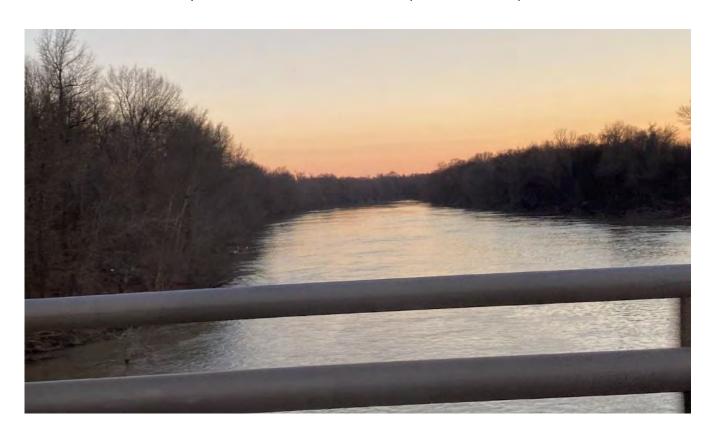



## **Table of Contents**

Chapte	er 1 - Introduction	1
1.1 P	Project Overview	1
	Project Alternatives	
1.3 R	Resources Evaluated in this Technical Report	3
Chapte	er 2 - Water Quality	4
2.1 R	Regulatory Context, Methodology, and Data Sources	4
	xisting Conditions	
	e Water Resources and Associated Water Quality	
	dwater Resources and Associated Water Quality - Aquifers	
	dwater Resources – Public Water Supplies	
	invironmental Consequences	
	e Water Quality	
	dwater	
2.4 A	voidance, Minimization, and Mitigation	14
Chapte	er 3 - Streams and Wetlands	16
3.1 R	Regulatory Context, Methods, and Data Sources	16
Regula	tory Context	16
Method	dology and Data Sources	17
3.2 E	Existing Conditions	18
Stream	1S	18
	nds	
	nvironmental Effects	
No Act	ion Alternative	23
Alterna	ative 2	23
	ative 3	
Alterna	ative A	24
Alterna	ative B	25
	ative C	
3.4 A	voidance, Minimization, and Mitigation	25
Chapte	er 4 - Floodplains	27
4.1 R	Regulatory Context, Methods, and Data Sources	27
4.2 E	existing Conditions	28
	nvironmental Effects	
No Act	ion Alternative	31
	ative 2	
Alterna	ative 3	32
Alterna	ative A	33





		No					
4.4	Avoida	nce, Minimization, and Mitigation	33				
Chaj	Chapter 5 - References3						
5.1	Acrony	ms	35				
5.2	Literat	ure Cited	35				
List	of Figu	res					
Figur	e 1: Futur	e I-57 Action Alternatives	2				
		Waterbodies and Source Water Protection Areas					
Figur	e 3: Re-ro	uted Stream (White Oak Slough) – Topographic View	19				
Figur	e 4: Re-ro	uted Stream (White Oak Slough) – LIDAR	19				
-		nd and Deepwater Habitats Classification					
		plains and Levees					
Figur	e 7: Exam	ple of a Levee that has a Freeboard Deficiency	30				
List	of Table	es					
Table	1: Geolog	gic Units and Aquifers Beneath the Mississippi River Valley Alluvial Aquifer	10				
Table	2: Summ	ary of Streams within Alternative Footprints	22				
Table	3: Summ	ary of Open Water and Wetlands within Alternative Footprints	23				
Table	4: Altern	ative 2 Area and Length of Potential Zone A Floodplain Impacts	31				
Table	5: Altern	ative 3 Locations of Potential Zone A Floodplain Impacts	32				
Lict	of Atta	chments					
LIST	OI Alla	chillents					
	hment A	Detailed Water Resources within the Alternative Footprints					
	hment B hment C	Soils Data Representative Photographs of Wetlands and Streams					
	hment D	USGS 7.5-minute Topographic Maps					
	hment E	Conceptual Other Waters Impact Tables					
	hment F	Conceptual Wetland Impact Tables					
Attac	hment G	Draft Wetland Delineation Report					





## Chapter 1 – Introduction

## 1.1 Project Overview

A Final Environmental Impact Statement (FEIS) is being conducted to study transportation improvements between Walnut Ridge in Arkansas and the Missouri State line. The Arkansas Department of Transportation (ARDOT) is providing direct oversight and management of the proposed project on behalf of the Federal Highway Administration (FHWA).

The study area is located in Clay, Greene, Lawrence, and Randolph Counties in northeast Arkansas. Construction of the proposed project would complete the improvements of future Interstate 57 (I-57) within Arkansas. The project includes improvements to the United States Highway (Hwy.) 67 corridor in northeastern Arkansas between the Hwy. 67/Hwy. 412 interchange in Walnut Ridge, Arkansas and the Missouri State line. The purpose of the project is to enhance connectivity and continuity of the National Highway System, provide a more resilient roadway, and provide for increased opportunity for economic development in northeast Arkansas.

The proposed project is needed to address a deficiency in the National Highway System in northeast Arkansas. The project is needed because there is a gap in the system linkage which diminishes connectivity and mobility of the National Highway System. Construction of the action alternative would complete the improvements of Future I-57 within Arkansas. Additionally, there is a lack of reliable transportation infrastructure to support economic development and a need to enhance resiliency to extreme weather events along the route. Furthermore, legislation designated this route as future Interstate Route 57. The project purpose, needs, and supporting information are discussed further in Chapter 1 of the FEIS.

## 1.2 Project Alternatives

Five action alternatives and a No Action Alternative are be considered and evaluated for the proposed project. Each of the action alternatives is shown in **Figure 1**.

The No Action Alternative would not involve the construction of the proposed highway but would include normal activities that involve providing for the safety and maintenance of local roadways. The No Action Alternative was compared against the action alternatives developed for this project. Selection of the No Action Alterative would avoid major state and federal spending but would not achieve project goals.

Project impacts were quantified based on the anticipated right of way (ROW) footprint of each action alternative. The footprint of each action alternative is defined as a consistent 400-foot-wide ROW with larger areas at the proposed interchanges. The footprints of Alternatives A and C also include a 0.29-mile and 0.17-mile section, respectively, of County Road 278 to accommodate a temporary, four-lane roadway that would tie each alternative back to Hwy. 67. The four-lane section to Hwy. 67 would be an interim condition that would be replaced with the proposed interchange connecting to MoDOT's proposed future corridor. The interim sections of Alternatives A and C that are along County Road 278, would be a four-lane highway with an approximately 170-foot and 165-foot-wide ROW, respectively. Detailed views of the alternative footprints are provided in Attachment A. The locations of the proposed interchanges can be seen in Figure 1. Unless otherwise noted, it is assumed that all areas within the ROW footprint would be directly affected by construction activities.



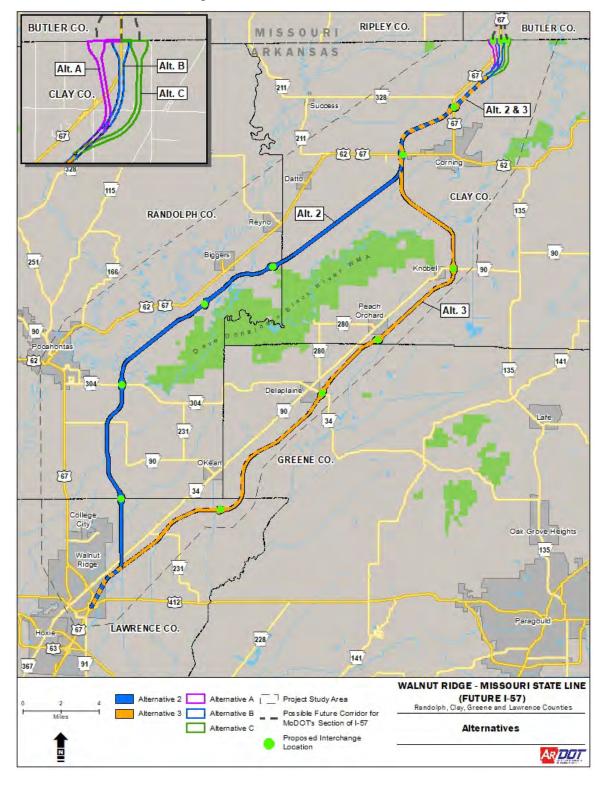


Figure 1: Future I-57 Action Alternatives



The size of each action alternative's footprint is listed below:

- Alternative 2 (Western alignment on new location 39.2 miles) 2,249 acres
- Alternative 3 (Eastern alignment on new location 41.3 miles) 2,337 acres
- Alternative A (Missouri connector to west of Hwy. 67 2.5 miles) 144 acres
- Alternative B (Missouri connector partially centered on Hwy. 67 2.3 miles) 139 acres
- Alternative C (Missouri connector to east of Hwy. 67 2.8 miles) 160 acres

## 1.3 Resources Evaluated in this Technical Report

This technical report includes the evaluation of the following resources:

- Chapter 2 Water Quality
- Chapter 3 Streams and Wetlands
- Chapter 4 Floodplains



## Chapter 2 – Water Quality

## 2.1 Regulatory Context, Methodology, and Data Sources

A desktop level analysis was used to determine the presence of water resources located within or flowing through the project area. This included a review of U.S. Geological Survey (USGS) topographic maps and aerial photography. A review of various technical reports prepared by the USGS provided general and specific information about the water quality of surface water and groundwater resources. Secondary sources prepared by the USGS and the Arkansas Geological Survey provided specific information about the hydrogeologic nature of the underlying geological units. The Arkansas Division of Environmental Quality (DEQ) website was used to obtain information about any streams that did not meet the water quality standards for the state. A preliminary visual assessment of the hydrologic features within the alternative corridors was performed the week of March 1, 2021. Hydrologic features identified during the desktop analysis were then field confirmed through a preliminary visual assessment to the extent practicable at public right of way (ROW) locations where the action alternatives intersect these hydrologic features. A detailed wetland delineation of the Preferred Alternative (Alternatives 2 and C) was conducted in July 2022 in accordance with the USACE Wetlands Delineation Manual (1987) and the Regional Supplement to the Corps of Engineers Wetland Delineation Manual: Atlantic and Gulf Coastal Plain Region (Version 2.0; USACE, 2010). A draft version of the wetland delineation report is available in Attachment G.

The Federal and State governments have enacted laws that help to avoid or minimize impacts to waters of the United States. Two laws, the Clean Water Act (CWA) of 1972 and the Safe Drinking Water Act, have been established to help protect the water quality of surface water and groundwater. Sections of the CWA govern discharge of pollutants into Waters of the United States which include traditional navigable waters as defined in 33 Code of Federal Regulations (CFR) 328. The following sections of the CWA and Rule 2 of the Arkansas Pollution Control and Ecology Commission (APC&EC) must be followed to minimize impacts to water quality during construction projects:

- Section 303(d) requires states to prepare a list of Section 303(d) impaired waters on which total maximum daily loads (TMDLs) or other corrective actions must be implemented. A TMDL is a calculation of the maximum amount of a specific pollutant that a waterbody can receive and still meet its water quality criteria and maintain its designated uses without violating water quality standards. The Arkansas DEQ compiles a list of impaired waterbodies and waterbodies with an assigned TMDL to comply with Section 303(d) of the CWA. To generally assess the surface water quality of the project area, the Arkansas GIS Office and the DEQ's Aqua View website were used to identify any streams within the study area that may be on the approved Arkansas list of 303(d) impaired streams.
- Rule 2 of the APC&EC outlines water quality standards and designated uses under Arkansas law
- Section 401 requires that any federally permitted project that may result in a discharge into water of the United States, a water quality certification be issued to ensure the discharge complies with applicable water quality requirements.
- Section 402 forms the National Pollutant Discharge Elimination System (NPDES), which regulates pollutant discharges, including stormwater, into waters of the United States. NPDES permits set specific discharge limits for point-source pollutants and outline special conditions and requirements for projects to reduce water quality impacts. Permits require that projects be designed to protect waters of the United States. Construction projects that will disturb one acre of land or more must comply with the requirements of the NPDES permits issued by the DEQ for stormwater discharges.



Section 404 regulates discharges of dredged or fill materials from construction activities into
waters of the United States, including wetlands. This project will require an individual Section
404 permit issued by the U.S. Army Corps of Engineers (USACE) before dredged or fill material
may be discharged into Waters of the United States.

The Safe Drinking Water Act helps protect the quality of drinking water for public water supplies. The Safe Drinking Water Act of 1974 and amendments passed in 1986 and amendments in 1996 protect public health by regulating the nation's public drinking water supply. Under the Safe Drinking Water Act, each state must conduct an assessment of its sources of drinking water to identify significant and potential sources or threats of contamination. Monitoring the quality of drinking water is the joint responsibility of the Arkansas Department of Health (ADH) and the state's public water supply systems.

The ADH was contacted to determine the location of public water supply systems within five miles of the project study area. Twelve community entities and one food plant (Peco Foods) have public water systems near the alternatives. Pocahontas receives its water source from the Black River. A total of 25 water wells provide a source of water for local communities and the Peco Food Plant.

### 2.2 Existing Conditions

The project area is located within the Mississippi Alluvial Plain of Arkansas. This area of eastern Arkansas is predominantly dedicated to farming and is heavily dependent on groundwater resources for irrigation and public water supplies. Both surface water resources and groundwater resources are used in concert to support agricultural practices within the project study area. Thousands of water wells are used daily.

#### **Surface Water Resources and Associated Water Quality**

The project area is located in the White River Basin and within the Mississippi Alluvial Plain. Topographic analysis indicates that surface water flow is generally to the southwest from the east side to the west side of the project area. Schrader (2015) describes groundwater flow in the general area of Crowley's Ridge that is an erosional remnant and prominent topographic feature of Tertiary age trending north-south from the Missouri-Arkansas border and is 100 to 200 feet higher than the surrounding lowlands. Crowley's Ridge is located about 5 to 10 miles east of the project area. Crowley's Ridge forms a physical barrier to groundwater flow in the Alluvial Aquifer. Regionally, west of Crowley's Ridge, groundwater flows from the northeast to the southwest (Schrader, 2015). Elevations are relatively flat and vary only by 150 feet from the Missouri to the Louisiana border with streams that are shallow, meandering, and have a low gradient.

Medium to large sized streams in the project area include Big Running Water Creek, Oak Creek Ditch, Post Oak Ditch, Water Oak Slough, Cache River Ditch Number 1, Little Village Creek Ditch, Little Running Water Ditch, Murray Creek, and Cypress Overcup Lateral. The primary pollutants in an area of agriculture would be turbidity, total phosphorous, nitrogen, and orthophosphate. Bank erosion and resulting sedimentation and turbidity would be a common issue in this area of land use. Typical causes of bank erosion are due to a lack of riparian vegetation and runoff.

The project area is located within five watersheds based on the 8-digit watershed hydrologic unit code (HUC). The 8-digit HUC watersheds located within the project area include the Cache, Upper-White-Village, Upper Black, Lower Black, and the Current. The 8-digit HUC is the most widely used hydrological unit for water resource planning and for identification of 303(d) impaired streams in



Arkansas. This watershed approach is advantageous because it considers all activities within a landscape that affect watershed health.

The 303(d) report contains the following format with five assessment categories of waters.

- Category 1 indicates that the waterbody is not impaired. Category 1a indicates that all designated uses and water quality standards are attained. Category 1b indicates that all designated uses and water quality standards are attained, but a TMDL exists for at least one water quality parameter.
- Category 2 indicates that some uses and standards are met, however, there is insufficient data to assess any uses.
- Category 3 indicates insufficient data to assess any uses.
- Category 4 indicates that the waterbody is impaired and does not require a TMDL. Category4a indicated that a TMDL has already been completed. Category 4b indicates that other pollution control requirements will result in water quality standards attainment. Category 4c indicates that impairment is not caused by a pollutant.
- Category 5 indicates that waters do not meet water quality standards, the waterbody is truly impaired and a TMDL is needed. Category 5 represent the worst water quality.

Waterbodies not identified on the 303(d) list are designated suitable for the propagation of fish and wildlife, primary and secondary contact recreation, agricultural and industrial types (Martin, 2021).

In accordance with Section 106 of the federal Clean Water Act and under its own authority, DEQ has established a comprehensive program for monitoring the quality of the State's surface waters. The DEQ collects surface water samples at various locations, utilizing appropriate sampling methods and procedures for ensuring the quality of the data collected. The objectives of the surface water monitoring program are to determine the quality of the state's surface waters, to develop a long-term database for long term trend analysis, and to monitor the effectiveness of pollution controls. The data obtained through the surface water monitoring program is used to develop the state's biennial 305(b) report (*Water Quality Inventory*) and the 303(d) list of impaired waters, which are issued as a single document titled Arkansas Integrated Water Quality Monitoring and Assessment Report is submitted to EPA (FTN, 2006a). Three impaired waterbodies that may receive stormwater flows were identified. These waterbodies are concerned impaired based on the 2018 EPA approved 303(d) list of impaired streams in Arkansas identified in the Integrated Water Quality Monitoring Assessment Report. Figure 2 shows the locations of the impaired waterbodies.

The Fourche River is on the 303(d) list for turbidity (category 5). Turbidity is an expression of the optical properties in a water sample that cause light to be scattered or absorbed and may be caused by suspended matter, such as clay, silt, finely divided organic and inorganic matter, soluble colored organic compounds, and plankton and other microscopic organisms (Standard Methods, 1999). The probable source of turbidity is from surface erosion and sedimentation (EPA, 2018). Water quality in the Fourche River is from non-point source pollution (Martin, 2021). A low priority has been set for restoration to be performed on the Fourche River (Martin, 2021; Wise, 2021). This means there is minimal information available for this waterbody to develop a TMDL. Currently there are no plans in place to protect or restore water quality for this waterbody (Martin, 2021). The Arkansas Department of Agriculture Division of Natural Resources was contacted to determine if any 319 programs are implementing any projects to improve the water quality of the Fourche River. Currently none of the 319 projects are along the Fourche River in the future I-57 study area (Brown, 2021). The Fourche River is in the western portion of the study area but does not cross any of the alternatives.



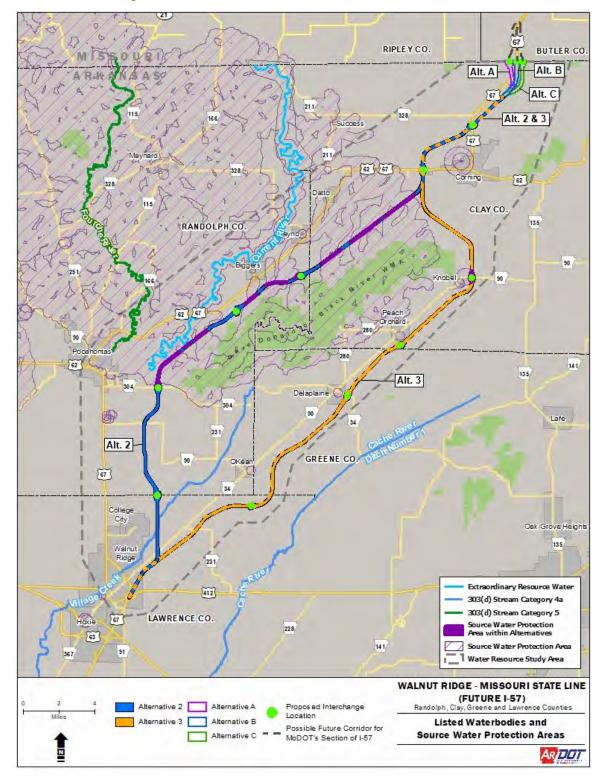


Figure 2: Listed Waterbodies and Source Water Protection Areas



The Cache River and Village Creek are listed as having turbidity impairments and have been assigned a TMDL (303(d) category 4a). The Cache River is located in the southern portion of the project area and forms the Lawrence/Greene County line. The Cache River is considered a channel altered stream (FTN, 2006a). A TMDL is the amount of a pollutant that a waterbody can assimilate without exceeding the established water quality standards for that pollutant. Through a TMDL, pollutant loads can be allocated to point sources and non-point sources discharging to the waterbody. The source of turbidity for the Cache River was listed as agriculture (FTN, 2006a). Turbidity cannot be expressed as a load as preferred for TMDLs. Section 303(d) of the Clean Water Act and regulations at 40 CFR 130.7 require TMDLs to consider seasonal variations for meeting water quality standards. Analysis determined that there is not a critical season or a single critical flow for TMDLs in the Cache River (FTN, 2006a). The report prepared by FTN represents the source of information other than the 303(d) list describing efforts to improve the water quality of the Cache River (Martin, 2021). Additionally, grants can be obtained through the Clean Water Act Section 319 Program to designated states to implement their approved nonpoint source management programs. The Arkansas Department of Agriculture Division of Natural Resources was contacted to determine if any 319 programs are implementing any projects to improve the water quality of the Cache River. Currently none of the 319 projects occur along the Cache River in the future I-57 study area (Brown, 2021). The Cache River is in the southern portion of **Figure 2** but outside of the study area.

Village Creek is shown to extend from Hwy. 304 south of the Black River and flows to the southwest toward College City and then through Walnut Ridge, crossing Alternative 2. The non-point source of turbidity was listed as agriculture. Over 87% of the Village Creek watershed is cropland which typically has greater soil erosion that other land uses such as forest or pasture (FTN, 2006b). ADEQ historical water quality data were available for three locations along the impaired reaches of Village Creek. These data were analyzed for long term trends, seasonal patterns, relationships between concentration and stream flow, and relationships between turbidity and total suspended solids (TSS). These analyses showed no significant seasonal pattern or relationships between concentration and stream flow, but higher turbidity levels tended to correspond with higher TSS values. Greater details are provided in FTN (2006b). The report prepared by FTN represents another source of information other than the 303(d) list describing efforts to improve the water quality of the Cache River (Martin, 2021). The Arkansas Department of Agriculture Division of Natural Resources was contacted to determine if any 319 programs are implementing any projects to improve the water quality of the Village Creek. Currently none of the 319 projects are along the Village Creek in the future I-57 study area (Brown, 2021).

Per DEQ's February 2021 response during agency coordination for the proposed project, it is imperative that best available measures be taken to minimize sedimentation and turbidity from entering these waterbodies during this project. Agency coordination letters are provided as an appendix in the FEIS document.

The most prominent perennial surface water feature in the project area is the Black River. The Black River extends the entire length of the project area, passes through the central portion of the project area, is about 200 feet in width with substrates that consists of silt, sand, gravel, and cobbles, and ranges in depth from 2.5 feet near the Alternative 2 proposed crossing to over 5 feet deep near the Alternative 3 proposed crossing. The Black River is surrounded by wetlands encompassed with bottomland hardwood forest located in the Dave Donaldson Black River Wildlife Management Area. The Black River provides clear and good water quality and provides suitable habitat for all of the state listed mussel species. Typical intermittent stream systems flowing through the alignment corridor range from a few feet in width to 16 feet in width with estimated depths of 1 to 5 feet.



One Extraordinary Resource Water (ERW), the Current River, extends from Pocahontas to the Arkansas/Missouri state line. The designated of an ERW is defined by DEQ's Regulation 2. A waterbody is classified as an ERW based on a combination of its chemical, physical, and biological characteristics and its watershed which is characterized by scenic beauty, aesthetics, scientific values, broad scope recreation potential, and intangible social values. No Wild and Scenic Rivers are located within the study area.

Surface water quality at any location is mostly related to the type of land use practices upstream of that location. Nutrients and sediment lost in irrigation runoff from agricultural fields can impact water quality in downstream waterways (Reba et al., 2020).

#### **Groundwater Resources and Associated Water Quality - Aquifers**

Arkansas is the fourth largest user of groundwater in the United States. The largest groundwater use occurs in northeast Arkansas where row-crop agriculture is prevalent and widespread (Kresse et al., 2014). The 16 aquifers of the state were divided into two major physiographic regions, the Coastal Plain Province (referred to as Coastal Plain) of eastern and southern Arkansas, which includes 11 of the 16 aquifers, and the Interior Highlands Division (referred to as Interior Highlands) of western Arkansas, which includes the remaining five aquifers. The 11 aquifers in the Coastal Plain consist of various geologic units that are Cenozoic in age and consist primarily of Cretaceous, Tertiary, and Quaternary sands, gravels, silts, and clays, (Kresse et al., 2014). From youngest to oldest, the aquifers within this part of the state include the Mississippi River Valley Alluvial aquifer, Jackson Group, Cockfield, Sparta, Cane River, Carrizo, Wilcox, Nacatoch, Ozan, and Trinity aguifers. In most areas, these rocks and sediments are less permeable than the overlying alluvial and terrace deposits of Quaternary age form the confining unit below the alluvial aquifer (Boswell et al., 1968). The groundwater flow direction is affected by Crowley's Ridge. Crowley's Ridge is a structural high and erosional remnant of Tertiary aged geologic units that physically divides the Mississippi River Valley Alluvial aquifer in the northern part of eastern Arkansas (Kresse et al., 2014). Crowley's Ridge is a barrier to groundwater movement in the northeastern part of the state and serves as a hydraulic barrier. West of Crowley's Ridge, which is where the proposed project is located, groundwater flows from northeast to southwest. West of Crowley's Ridge, the Mississippi River Valley Alluvial aquifer serves over 70 municipalities as a public water supply (Kresse et al., 2014).

In addition to the use of the Mississippi River Valley Alluvial aquifer in northeastern Arkansas, the Nacatoch aquifer supplies ground water to Lawrence and Greene Counties and the Wilcox and Sparta aquifers supply groundwater to Greene and Clay Counties. In extensive areas of eastern Arkansas, water was withdrawn from the Mississippi River Valley Alluvial aquifer at rates that exceeded recharge; therefore, those rates could not be sustained indefinitely. In some areas, deeper wells were required into underlying formations including the Sparta, Cockfield, and Wilcox aquifers. Eastern Arkansas relies heavily on groundwater for public water supply, tapping many aquifers including the Sparta, Wilcox, Mississippi River Valley Alluvial, Cockfield, and Nacatoch aquifers. Below is a summary of some of the underlying aquifers that are located beneath project area counties.

#### The Mississippi River Valley Alluvial Aquifer

The study area is located within the Mississippi River Valley Alluvial aquifer of Arkansas and accounts for approximately 94% of all groundwater used in the state and predominantly used for agriculture (Kresse et al., 2014). This aquifer has become one of the most important agricultural regions in the United States. The Mississippi River Valley Alluvial aquifer is the uppermost aquifer and consists of 60 to 140 feet of Quaternary sand and gravel that grades from gravel at the bottom to fine sand near the top deposited in river and river-proximal environments. Annual water withdrawn from the Aquifer in 2010 ranged from 150 to 450 million gallons per day (mgd). Use of the Mississippi Embayment Aquifer



System Regional Groundwater Availability Study (USGS, 2021) indicates that in 2015, the total self-supplied groundwater withdrawals were 232 mgd in Lawrence County, 131 mgd in Randolph County, 819 mgd in Clay County, and 367 mgd in Greene County.

The aquifer effectively can be divided into two distinct units based on lithologies: a lower unit that contains the primary aquifer consisting of coarse sands and gravels derived from alluvial and terrace deposits that coarsen downward and an upper unit that consists of fine sand, silt, and clay that serves as a confining unit of varying competency which is of local importance as a lower-yield aquifer primarily for domestic use. Crowley's Ridge, a structural high and erosional remnant of the Tertiaryage units located to the east of the project area, physically divides the Mississippi River Valley Alluvial aquifer in the northern part of eastern Arkansas. Virtually all the landforms and associated sediments within the Mississippi River Valley are the direct result of fluvial processes. The dominant controls influencing the fluvial processes and resulting surface geology of the Lower Mississippi Valley were glaciation, climate, relative sea level, tectonism, and subsidence. Below are some additional details on some of the underlying aquifers.

Sedimentary rocks and unconsolidated sediments of Tertiary age or older underlie the alluvial aquifer. These rocks are less permeable that the overlying alluvial and terrace deposits of Quaternary age form the confining unit below the alluvial aquifer. The Mississippi River Valley Alluvial aquifer in some areas is hydraulically connected to underlying Tertiary aquifers. Aquifer-test data for the Mississippi River Valley Alluvial aquifer are found in numerous countywide reports dating back to the mid-1950s (Kresse et al., 2014). Reported yields throughout the Mississippi River Valley Alluvial aquifer in eastern Arkansas ranged from 400 to 3,000 gallons per minute (gal/min) with a maximum of 5,000 gal/min for Arkansas. Yields of 2,000 gal/min were cited as common, which was the most commonly reported yield cited in the earlier countywide Alluvial. **Table 1** shows the underlying geologic units and aquifers beneath the Mississippi River Valley alluvial aquifer.

Table 1: Geologic Units and Aquifers Beneath the Mississippi River Valley Alluvial Aquifer

Time Stratigraphic Unit		Group	Formation		Aquifer		
Era	System	Series	Group	FUIIIatii	Aquilei		
		Holocene		Alluvium		Mississippi River Valley	
		Pleistocene	Jackson	Terrace Deposits		iviississippi niver valley	
Quaternary				Jackson Group		Vicksburg-Jackson confining unit	
		Eocene	Claiborne	Cockfield Formation		Upper Claiborne Aquifer	
Cenozoic	Tertiary			Cook Mountain Formation		Middle Clairborne confining unit	
				Sparta Sand		Middle Claiborne confining Aquifer	
		Tertiary			Cane River Formation	Memphis Sand	Lower Clairborne Aquifer
			Wilcox	Carrizo Sand		Upper, middle, lower	
		Paleocene		Undifferentiated		Wilcox Aquifers	
			Midway	Porters Creek Clay		Midway Confining Unit	
			Midway	Clayton Formation		Midway Confining Unit	

Source: Modified from Hart et al., 2008.



Pumping from the most productive aquifers in Arkansas—the Mississippi River Valley Alluvial and Sparta aquifers—has led to declining water levels, reduced well yields, and the deterioration of the water quality in areas throughout the Coastal Plain of eastern and southern Arkansas. These aquifers are the principal sources of water for irrigation, industrial, and public drinking-water supplies in this region. Since enactment of the Arkansas Ground Water Protection and Management Act, the ANRC has designated three critical groundwater areas in Arkansas. The ANRC is the state's water resources planning and management agency. A "critical groundwater area" is an area determined by ANRC to have significant groundwater depletion or degradation. Specific criteria used in designating a critical groundwater area include water levels declining at a rate of one foot per year (ft/yr) or more, water levels declining below the top of a confined aquifer or below the 50% saturated thickness for an unconfined aquifer, and groundwater-quality degradation. Designating an area indicates that ANRC may later determine that limiting groundwater withdrawals by users within the critical groundwater area may become necessary to maximize the area's remaining groundwater resources. Designation also enhances awareness of the groundwater problems within the area and makes it easier to obtain local, state, and federal funds to resolve the area's groundwater problems. Although ANRC has the authority to initiate regulation in critical groundwater areas by following a process similar to that required for designation of an area, the ANRC has never taken steps to regulate these areas.

One of the three critical groundwater areas designated in Arkansas is the Cache critical groundwater area. The project study area is located within the Cache critical groundwater area. The Cache critical groundwater area, designated in 2009, includes the Mississippi River Valley Alluvial and Sparta aquifers within parts of Clay, Craighead, Cross, Greene, Lee, Poinsett, and St. Francis Counties lying west of Crowley's Ridge. Water-level data from this area continue to show declines.

#### The Sparta Aquifer

The Sparta aquifer is the second most important aquifer in terms of use, and the aquifer was used in the past dominantly as a water source for public and industrial supply, although increasing irrigation use is occurring because of critically declining water levels in the Mississippi River Valley Alluvial aquifer. The Sparta aquifer system is used in Clay and Greene Counties. Other aquifers of the Coastal Plain generally are used as important local sources of domestic, industrial, and public supply, in addition to other minor uses. Water quality generally is good for all aquifers of the Coastal Plain, except for elevated iron concentrations and localized areas of high salinity. The high salinity results from intrusion from underlying formations, evapotranspiration processes in areas of low recharge, and inadequate flushing in downgradient areas of residual salinity from deposition in marine environments (Kresse et al., 2014). Groundwater generally trended from a calcium- to a sodium-bicarbonate water type with increasing cation exchange along the flow path.

The Sparta aquifer of Tertiary age is the thickest sand in the Mississippi embayment and its importance as an aquifer is recognized by the fact that it is second in use only to the Mississippi River Valley Alluvial aquifer (Kresse et al., 2014). In northeastern Arkansas, the Sparta aquifer locally is referred to as the Sparta-Memphis aquifer (Schrader, 2015; Holland, 2007). The aquifer is an extremely important source of groundwater in eastern Arkansas. The Sparta Sand consists of varying amounts of well-sorted, rounded to subrounded, fine- to medium-grained quartz sand interspersed with silt, clay, shale, and lignite. Layers of coarse sand and fine gravel occur in some areas. The lower part of the unit generally contains more sand, and the upper part generally contains more clay and shale. The Sparta Sand in northeastern Arkansas is mainly composed of thick-bedded, very fine to gravely, well-sorted sand, with some argillaceous, micaceous, and lignitic materials. In the Sparta Sand subcrop area, the Sparta aquifer and overlying Mississippi River Valley Alluvial aquifer are hydraulically connected. This area serves as an important recharge area to the Sparta aquifer. The Sparta aquifer provides water of



excellent quality, and wells often yield hundreds to thousands of gal/min. The Sparta aquifer provided 196.64 mgd in 2010, which was 2.5% of all groundwater used in Arkansas (Kresse et al., 2014).

#### The Nacatoch Aquifer

Northeastern and southwestern Arkansas generally exhibited the same patterns of water use from the Nacatoch aquifer. Northeastern Arkansas had the greater use in 1990. Clay County Regional Water District is the largest user of the Nacatoch aquifer for public supply with a total of 0.64 mgd, which accounted for approximately 19% of total Nacatoch water use in 2010. In northeastern Arkansas, the sand content of the Nacatoch aquifer increases from 40–60%. The Nacatoch aquifer is clean, medium-to coarse-grained sand in Clay, Greene, and Lawrence Counties. The aquifer thickens in these counties to approximately 200 feet and yields are as much as 500 gal/min. Rock/water interactions in the aquifer can change the major chemical composition and resulting water type along the groundwater-flow path. Generally, sites with sodium less than 50% of the total cations, which indicate a calcium-bicarbonate water type, were located in or less than about one mile from the outcrop area. An outcrop is when the rocks of the aquifer are exposed at the surface. Sites further downgradient had sodium percentages more than 50% and ranging upward to 99%.

#### Wilcox Aquifer

The groundwater quality of the Wilcox aquifer is of very good quality, with the exception of high salinity and elevated dissolved solids downgradient from the outcrop and subcrop areas for most of the western extent of the aquifer. The portions of the aquifer beneath the surface are called subcrops. The water becomes brackish or saline within a short distance downdip from the outcrop and is unfit for most purposes. The nearest water quality data available were located in an area to the east of Crowley's Ridge. The aquifer is considered to be an aquifer dominated by a sodium-bicarbonate water type with calcium-bicarbonate as a secondary water type depending on location. The exchange of calcium for sodium occurs on solid-phase exchange sites as groundwater travels through the unsaturated and saturated zones. Groundwater from the Wilcox aquifer generally does not show a well-defined trend in its western extent, although most of the calcium-dominated groundwater occurs in the outcrop areas. In the eastern extent of the aquifer, practically all of the sites exhibit a strongly sodium-bicarbonate water type. Nearly half of the sites have sodium constituting greater than 90% of the total cations, which reflects a more geochemically evolved groundwater at greater distances from the subcrop area. Sulfate, chloride, and dissolved solid concentrations are generally low. Generally, the overall best water quality is located in the eastern extent of the aquifer in northeastern Arkansas.

Water use from the aquifer has been greatest in Greene County within the project area. Wells completed in the Wilcox aquifer typically yield from 500 to more than 2,000 gal/min. The annual water withdrawn for the Wilcox aquifer in 2010 was 0.1-2.0 mgd for Clay County and 6.1-8.0 mgd for Greene County (Kresse et al., 2014).

#### Ozark Aquifer

The Ozark aquifer is located on the western side of the study area. The lateral extent of the Ozark aquifer is govern by a geologic feature known as the fall line. The Ozark aquifer is west of the Mississippi River Valley Alluvial aquifer. The aquifer comprises a sequence of formations predominated by dolostones along with minor limestone, sandstone, and shale intervals of Ordovician age. These formations contribute to the unique and complex hydrogeology and physiography of the Ozarks. The karst of the carbonates in the upper Ozark aquifer presents a physiographic and hydrologic environment in the Salem Plateau similar in aspect and complexity to that seen for the Springfield Plateau (Kresse et al., 2014). Karst-development processes and history are an important aspect of the geology controlling groundwater hydrology in the Ozarks. The exposed formations of the Ozark aquifer present an example of a dynamic and developing karst aquifer. Also evident are episodes



of karst development through geologic time that results in overlap and interplay of recent and paleokarst features. Karst aquifers are typified by a combination of diffuse and focused flow. The slower flow occurs through diffuse flow paths and allows for sustained groundwater input to streams and springs, even during dry periods. Extremely rapid response and transit times occur during precipitation events and are provided through preferential flow paths and karst features. In karst systems, large cavernous conduits allow for deep and rapid circulation of recharge. Conduits and dissolution-enhanced fracturing help integrate flow to spring resurgences (Harvey, 1980). As a result, springs are common throughout the exposed sections of the Ozark aquifer (Kresse et al., 2014). Historical hydrogeological data indicated the potential for groundwater to move from the Ozarks aguifer system to beneath the Fall Line or escarpment into the northern Mississippi embayment, ultimately to discharge to overlying embayment aquifers or directly to streams. Groundwater from the carbonate rocks constituting the Ozark aquifer is of a hard to very hard, calcium-magnesiumbicarbonate type. Sulfate concentrations generally are low in the Ozark aquifer and were below the Federal secondary drinking-water regulation of 250 milligrams per liter (mg/L) in all samples from the upper and lower Ozark aquifer and chloride concentrations generally are low throughout the Ozark aquifer (Kresse et al., 2014). Primary use of the Ozark aquifer is for public supply with 76.45 mgd withdrawn for public supply in 2010. Irrigation use from the Ozark aquifers was estimated at approximately 20 mgd in 2010 (Kresse et al., 2014). No karst areas or features would be impacted by the action alternatives.

### **Groundwater Resources – Public Water Supplies**

As identified by the ADH, 12 community entities and one food plant (Peco Foods) have public water systems near the alternatives (Figure 2). The community entities include Walnut Ridge Waterworks, Biggers Waterworks, Reyno Waterworks, Success Waterworks, Corning Waterworks, O'Kean Waterworks, Delaplaine Waterworks, Peach Orchard Waterworks, Knobel Waterworks, Pocahontas Waterworks, Clay County Regional Water District, and Peco Foods. Each of these public water supplies has an associated source water assessment/protection area that surrounds it. Source water assessment areas are areas ADH define or delineate that could possibly be more harmful or sensitive to a water source if contaminated. They can depend on many things and cover larger or smaller areas depending on the type of source (well, lake, river, spring, etc.). These areas are referred to as "source water protection areas" in Figure 2. Additionally, hundreds of ANRC-identified water wells occur within the project study area.

## 2.3 Environmental Consequences

#### **Surface Water Quality**

Village Creek, which is on the 303(d) list as being impaired for silt and turbidity, crosses through Alternative 2's alignment. Approximately 918 linear feet (LF) of Village Creek occur within Alternative 2. A bridge over Village Creek is proposed at this location; the precise quantity of stream impacts is not known at this point in the design process. No other 303(d) listed streams would be impacted by the action alternatives.

Construction activities would include removal of existing vegetation during clearing and grubbing and would expose soils adjacent to stream crossings and within the ROW. As a result, a temporary increase in stream sedimentation could occur due to stormwater runoff and would be the greatest in the immediate vicinity if the crossings. All alignments would cross the same soil types and associated slopes adjacent to impacted streams. The substrate within stream segments crossed is nearly identical from location to location and therefore, potential construction impacts to the surface water quality would be non-alternative specific and could occur regardless of the alternative selected. Impacts from



any action alternative would be temporary in nature and would be minimized through site specific erosion and sedimentation control measures at all stream crossings.

The operation and maintenance of a highway would produce additional sources of surface water pollutants. During highway operation, sources of potential pollutants from vehicles includes heavy metals such as copper, zinc, and lead from tire and brake wear, motor oil additives, and roadway maintenance practicing such as sanding, deicing, and applications of herbicides on ROW. The rate of deposition and magnitude of these pollutants in highway runoff are site specific and are affected by traffic volumes, highway design, maintenance activities, surrounding land use, climate, and accidental spills.

#### Groundwater

Construction would increase the amount of impervious cover within the local watershed which would reduce the amount of infiltration. However, the change in land use associated with the construction of the proposed project would have low to negligible effect on recharge to the underlying aquifer because of the remaining amount of the undeveloped land available for groundwater recharge.

With regards to public water supplies and wells, impacts are summarized below for each alternative.

#### No Action Alternative

No impacts to water resources would occur as a result of the No Action Alternative as it would require no impacts public water supplies or wells.

#### Alternative 2

Alternative 2 would impact a total of approximately 549 acres of the Pocahontas Waterworks source water protection area located northeast of Pocahontas. As Pocahontas's drinking water is surface water sourced, any stormwater from construction associated with Alternative 2 would have to travel many stream miles to have an impact on the water supply. The primary pollutant of concern would be turbidity. Alternative 2 would impact one ANRC-identified domestic well (a private well); proper well abandonment would be required.

#### Alternative 3

Alternative 3 would impact a total of approximately 68 acres of the Clay County Regional Water District wellhead protection area located near the community of Knobel. A wellhead protection area special provision would be required if this wellhead protection area is impacted. Coordination is required with the ADH to ensure no damage would occur to the well itself nor the water table/aquifer.

#### Alternatives A, B, and C

Alternative A, B, and C would not impact any public water supplies.

## 2.4 Avoidance, Minimization, and Mitigation

Erosion and sediment control would follow ARDOT's BMPs to minimize sedimentation during construction and help to minimize sediment and pollutant runoff into surrounding wildlife habitat and/or from entering the Black River or other surrounding streams. BMPs would also include protecting natural stream buffers where feasible.

During work near Village Creek, a 303(d) listed stream, best available measures would be used to minimize sedimentation and turbidity from entering the waterbody during construction activities.



Avoidance and minimization measures would be implemented through the ARDOT special provision (SP) for water pollution control.

Project construction would comply with all provisions of the NPDES Construction Stormwater General Permit ARR150000 and submit a Stormwater Pollution Prevention Plan to the DEQ Office of Water Quality. A Short Term Activity Authorization from DEQ would be obtained for any instream activity associated with this project. This allows for the temporary exceedance of the water quality standards for activity that is essential to the protection or promotion of the public interest and where no permanent or long term impairment of beneficial uses is likely to result.

ARDOT would take special measures during construction activities within source water protection areas. If any wellhead protection areas are impacted, avoidance and minimization measures would be implemented through the ARDOT SP for wellhead protection. When an ARDOT project intersects a wellhead protection area, coordination is required with the ADH to ensure no damage would occur to the well itself nor the water table/aquifer. Appropriate coordination with the ADH will occur, if required, for the Preferred Alternative.



## Chapter 3 – Streams and Wetlands

### 3.1 Regulatory Context, Methods, and Data Sources

#### **Regulatory Context**

There are five primary water resources addressed in this section: wetlands, streams, ponds, springs, and other surface waters (i.e., reservoirs). Federal and state statutes identified below are in place to regulate impacts to these water resources.

- Executive Order (EO) 11990 Protection of Wetlands
- Section 404 of the Clean Water Act (CWA)
- Section 401 Water Quality Certification regulated within the purview of the CWA
- Section 402 National Pollutant Discharge Elimination System (NPDES), also within the purview of the CWA
- Rivers and Harbors Act of 1899
- 7 Code of Federal Regulations (CFR) Part 12 Farmed Wetlands and Prior Converted Cropland
- Agricultural Act of 2014 Agricultural Conservation Easement Program

These statutes aim to prevent or minimize the loss of wetlands and streams, control discharges and pollution sources, establish water quality standards, protect drinking water systems, and protect aquifers and other sensitive ecological areas. Wetlands are areas typically inundated or saturated by surface or groundwater to the extent that they can support vegetation adapted for life in wet soil conditions. Wetlands are protected under Section 404 of the CWA because they provide flood control, aid in water quality, and provide wildlife habitat.

Discharges of dredged or fill material into waters of the U.S. are regulated under Section 404 of the CWA. Any such action proposed in wetlands or other waters of the U.S. are subject to review by the U.S. Army Corps of Engineers (USACE) and other federal and state agencies and require authorization by USACE. For jurisdictional purposes, USACE and the U.S. Environmental Protection Agency (EPA) jointly define wetlands as follows: "Those areas that are inundated or saturated by surface or ground water at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bogs, and similar areas" (USACE, 1987).

According to 7 CFR part 12.2, a Farmed Wetland (FW) "is a wetland that prior to December 23, 1985, was manipulated and used to produce an agricultural commodity at least once before December 23, 1985, and on December 23, 1985, did not support woody vegetation and met the following hydrologic criteria:

- (i) If not a playa, pocosin, or pothole, experienced inundation for 15 consecutive days or more during the growing season or 10 percent of the growing season, whichever is less, in most years (50 percent chance or more), which requisite inundation is determined through:
  - (A) Observation of wetland hydrology indicators as identified in the local NRCS Field Office Technical Guide;
  - (B) Procedures identified in State Off-Site Methods for wetland identification set forth in the local NRCS Field Office Technical Guide; or
  - (C) The use of analytic techniques, such as the use of drainage equations or the evaluation of monitoring data.
- (ii) If a playa, pocosin, or pothole experienced ponding for 7 or more consecutive days during the growing season in most years (50-percent chance of more) or saturation for 14 or more consecutive days during the growing season in most years (50-percent chance or more). Wetlands which are found to support wetland hydrology through Step 1 of the wetland determination process in

Chapter 3 16



 $\S12.30(c)(7)$  and application of the procedures described in  $\S12.31(c)$  will be determined to meet the requisite criteria."

According to 7 CFR part 12.2, Prior-converted cropland (PC) "is a converted wetland where the conversion occurred prior to December 23, 1985, an agricultural commodity had been produced at least once before December 23, 1985, and as of December 23, 1985, the converted wetland did not support woody vegetation and did not meet the hydrologic criteria for farmed wetland".

FWs are generally regulated by the USACE. PCs that are certified by NRCS are exempt from Section 404 wetland regulations. However, if the land changes to a non-agricultural use, or is abandoned, according to the criteria established by USACE and EPA, it may be regulated under the CWA.

As authorized through the 2008 Farm Bill, Natural Resources Conservation Service (NRCS) manages the Wetland Reserve Program (WRP) which is a voluntary incentive program offering landowners technical and financial support to protect, restore, and enhance wetlands on their property (NRCS, 2021). All action alternatives have been designed to avoid WRP sites.

#### **Methodology and Data Sources**

A desktop level analysis was initially completed to determine the presence of streams, wetlands, ponds, springs, reservoirs, and WRP sites located within or flowing through the proposed action alternatives. Stream locations are shown in **Attachment A**. The desktop level analysis included detailed review of environmental databases and GIS resources including, but not limited to National Wetland Inventory (NWI), NRCS soils data, LIDAR mapping, historic aerial photography, and U.S. Geological Survey (USGS) historic topography. **Attachment B** contains an overview of the soils data collected for the action alternatives.

Water resources identified during the desktop analysis were then field confirmed the week of March 1, 2021 through a preliminary visual assessment to the extent practicable at public rights of way (ROW) where the proposed action alternatives intersected water resources, which were classified by qualified wetland biologists based on Cowardin et al. (1979). Representative photographs of wetlands and streams observed within the action alternatives are provided in **Attachment C**.

Vegetation and hydrology characteristics of each wetland were documented and overlaid with NRCS hydric soils data, which resulted in high confidence data for identification of wetlands. In July 2022, a detailed wetland delineation was conducted of these high confidence areas for the Preferred Alternative (Alternatives 2 and C) in accordance with the routine approach described in the USACE Wetlands Delineation Manual (1987) and the Regional Supplement to the Corps of Engineers Wetland Delineation Manual: Atlantic and Gulf Coastal Plain Region (Version 2.0; USACE, 2010). A draft version of the wetland delineation report is available in **Attachment G**.

The proposed action alternatives are located within the delta plains of the Mississippi River, which is extensively farmed. As a result, evaluation of FWs were evaluated in this report. Landowner rights prevented the use of USDA/NRCS data to be reviewed for locations of FW and PC wetlands; however, these resources were identified by overlaying NRCS hydric soils data, USGS topographic mapping, land use data, and historic aerial photography. By adjusting the transparency of these data, and delineating areas saturated for multiple years that were cleared of trees prior to 1985, overlapping areas are shown, which reveal high confidence areas that are likely FWs. As a result of the entire action alternatives being extensively farmed, farmland not identified as possible farmed wetlands (PFW), wetlands, streams, roads, upland forested areas, and structures are considered PC. Coordination to



obtain landowner permission for hundreds of properties within the action alternatives to obtain more detailed information regarding FW and PC areas would not fit the schedule associated with this EIS. The preliminary visual assessment included field reviews of stream crossings identified as Other Waters (OW) that were evaluated regarding flow regime and observable ordinary high water marks (OHWM), and were also classified according to Cowardin et al. (1979). **Attachment A** shows detailed locations of preliminary identified wetlands, streams, ponds, and PFWs within the action alternatives. USGS 7.5-minute topographic maps are provided in **Attachment D**.

## 3.2 Existing Conditions

As noted in previous chapters, the proposed action alternatives are extensively farmed, primarily confining wetlands to areas within field transition areas, windrows, and within the floodplain associated with the Black River. Major crops in the area include cotton, rice, corn, soybeans, maize, and wheat. Seasonal variations and crop rotations are common farming practices, which result in different irrigation strategies depending on the crop planted in each field. Rice crops require seasonal inundation/saturation for best crop yields; however, as rice had already been harvested from the area, many of the fields were not flooded. As the site visit occurred during the first week of March, all crops had been harvested within the alternative footprints. The most active harvesting times of year in Arkansas (USDA, NASS, 2021) for the following crops is identified below:

- Wheat June
- Corn August to September
- Rice September
- Cotton October
- Soybeans November

Soils within all action alternatives are predominantly considered silt loam, loam, sandy loam, or fine sandy loam as classified by NRCS (Web Soil Survey, accessed June 2021). All soil types identified within the action alternatives were identified on the NRCS hydric soils list for Arkansas.

#### Streams

Alternatives 2 and 3 contain ephemeral, intermittent, and perennial stream systems, all of which have been rerouted or channelized (term used interchangeably with "ditched") in the past, with the exception of the Black River and Murray Creek. Alternatives A, B, and C contain ephemeral and intermittent stream systems. Typical intermittent stream systems flowing through the alignment corridor range from a few feet in width to 16 feet in width with estimated depths of 1 to 5 feet. **Attachment A** shows an overview of stream locations.

**Figure 3** and **Figure 4** represent one example of a historically rerouted natural channel, which is common in the region. The action alternatives also contain numerous canals/ditches constructed to aid in water movement off or onto cropland. These created channels were also determined to be ephemeral, intermittent, or perennial based on USGS topographic mapping. Natural stream courses that have been re-routed and channelized over time through man-made drainage ditches created for the primary purpose of draining and/or retaining hydrology in agricultural fields were also noted. Hydrology within all the stream and canal systems in the general area are continually influenced by pumping activities and directly related to irrigation associated with farming practices (primarily for rice crops). These manipulated hydrology schemes were observed throughout the study area. Additionally, the area received 3.84 inches of rain within the two weeks prior to the 2021 site visit.

Chapter 3
Streams and Wetlands





Figure 3: Re-routed Stream (White Oak Slough) – Topographic View

Figure 4: Re-routed Stream (White Oak Slough) - LIDAR



The Black River flows east to west and has a substantial wooded riparian zone on its south bank and very minimal to no riparian zone on its north bank at the proposed Alternative 2 crossing. Conversely, at the proposed Alternative 3 crossing, the river has a very narrow wooded riparian zone along its south bank (estimated at 20 feet wide) but has an average 100-foot-wide riparian zone on the north bank. Combined, approximately 830 linear feet (LF) of flow line of the river are located within the



Alternative 2 and 3 proposed crossings. The Black River ranges in width from approximately 198 feet wide near the Alternative 2 proposed crossing to 180 feet wide near the Alternative 3 proposed crossing. A USGS bathymetric survey of the Black River indicates that the river ranges in depths from 2.5 feet near the Alternative 2 proposed crossing to over 5 feet deep near Alternative 3 proposed crossing.

The ecological nature of the streams within the action areas is limited due to the partially impaired status due to the turbid waters observed. Within the action areas, the Black River provides the highest level of aquatic habitat and as a result, fish and aquatic species diversity. Ecological discussions of the water resources within the action alternatives are discussed further in Biological Technical Report prepared for the EIS.

#### Wetlands

As mentioned earlier in this Chapter, several wetland types were documented to occur within the alternative corridors and classified according to Cowardin et al. (1979). This naming system consists of classifying wetlands into one of the five hydrology systems identified by Cowardin, one of which is palustrine wetlands. Palustrine wetland systems include all nontidal wetlands dominated by trees, shrubs, persistent emergent, emergent mosses, or lichens (Cowardin et al., 1979). Palustrine systems are broken down further into eight hydrological regimes, four of which are identified within the action alternatives and are highlighted in **Figure 5**.

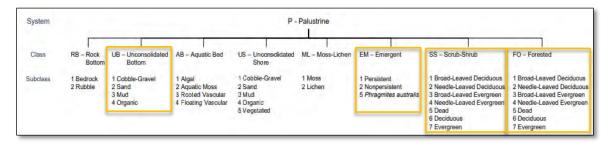


Figure 5: Wetland and Deepwater Habitats Classification

Unconsolidated bottom wetlands (i.e., PUB wetlands) are those that have 25% ground cover of cobble or gravel, sand, mud, or organics with less than 30% vegetative cover. These wetland types are generally characterized by the lack of stable surfaces for plant establishment, which is also affected by temperature and light penetration. Only a few PUB wetlands were identified within the action alternatives and were associated with ponds. These ponds have some ecological value such as providing foraging habitat for waterfowl. Due to the relatively isolated nature of the ponds in the action area in connection to streams or other wetlands and their small size, ecological contributions to the area as a whole are limited.

Emergent wetlands (i.e., PEM wetlands) are those wetlands characterized by rooted herbaceous vegetation that is adapted to wetter growing conditions and present for most of the growing season in most years. These wetlands are typically dominated by rooted perennial plant communities and can include both persistent and nonpersistent species. Due to the extensive farming of the landscape, there are few emergent wetlands within the action alternatives. These wetlands within the action alternatives provide some wildlife value for foraging, cover, and nesting habitat.



Scrub-shrub wetlands (i.e., PSS wetlands) are dominated by shrubs, young trees, and woody vegetation that is stunted due to environmental conditions that are less than 20 feet in height. These wetland types are often representative of the successional stage leading to forested wetlands. PSS wetlands within the action alternatives were minor and small. Although limited based on size, these wetlands would also provide habitat for wildlife. If left unmanaged or undisturbed, they would mature into forested wetlands.

Forested wetlands (i.e., PFO wetlands) consist of woody vegetation that is taller than 20 feet in height and are also known as bottomland hardwoods. Forested wetlands comprise the majority of wetland types within the action alternatives and are associated with lower areas in the landscape not suitable for farming. The forested wetlands within the action alternatives provide nesting, foraging, and protection habitat for wildlife.

Observable wetlands appeared to be confined to windrows and field edges between major crop fields. Dominant wetland plant species observed during the early March 2021 preliminary visual assessment in the wetland types include:

- Palustrine Emergent Wetlands (PEM):
   Common rush (Juncus effusus), yellow foxtail (Setaria pumila), curly dock (Rumex crispus),
   buttercup (Ranunculus species), pennywort (Hydrocotyle species), bushy bluestem
   (Andropogon glomeratus), cattail (Typha species), sedges (Carex species), tridens (Tridens
   species), panicgrass (Panicum species), spikerush (Eleocharis species), rosemallow (Hibiscus
   species), hemlock (Cicuta species), smartweed (Persicaria species), scouringrush horsetail
   (Equisetum hyemale), iris (Iris species), goldenrod (Solidago species), great ragweed
   (Ambrosia trifida), woodoats (Chasmanthium species), and aster (Symphyotrichum species).
- Palustrine Scrub-Shrub Wetlands (PSS):
   Buttonbush (*Cephalanthus occidentalis*), trumpet creeper (*Campsis radicans*), greenbrier (*Smilax rotundifolia* and *S. bona-nox*), winter creeper (*Euonymus fortunei*), eastern poison ivy (*Toxicodendron radicans*), and blackberry (*Rubus* species).
- Palustrine Forested Wetlands (PFO): Willow oak (*Quercus phellos*), cherrybark oak (*Quercus pagoda*), black willow (*Salix nigra*), green ash (*Fraxinus pennsylvanica*), elm (*Ulmus* species), bald cypress (*Taxodium distichum*), honey locust (*Gleditsia triacanthos*), and sugarberry (*Celtis laevigata*).

Dominant upland plant species observed in field transitions and windrows included: Bermuda grass (Cynodon dactylon), johnsongrass (Sorghum halepense), vetch (Vicia species), broomsedge (Andropogon virginicus), little barley (Hordeum pusillum), giant foxtail (Setaria faberi), annual bluegrass (Poa species), henbit (Lamium amplexicaule), plantain (Plantago species), daffodil (Narcissus pseudonarcissus), wild onion (Allium species), American pokeweed (Phytolacca americana), white clover (Trifolium repens), ragweed (Ambrosia species), sumac (Rhus species), post oak (Quercus stellata), eastern red-cedar (Juniperus virginiana), pine (Pinus species), hickory (Carya species), winged elm (Ulmus alata), and three awn (Aristida species).

Ecologically, wetlands are considered some of the most species rich ecosystems. Fully functional wetlands can support a wide variety of wildlife species including wood ducks, geese, some raptors, wading birds, migratory birds, song-birds, reptiles and amphibians, fish and other aquatic species. Wetlands provide an important forage, breeding, nesting base for migratory waterfowl (USFWS, 2012). Inundated wetlands also provide important spawning and nursery areas as well as food cycle support



for commercial and recreational fish industries (NRCS, 1995). They also provide habitat for federal and state listed threatened and endangered species, including plants, such as the Pondberry.

Wetlands within the area of the project also contribute to flood protection in that they serve as natural sponges that release surface water slowly (USFWS, 2012). The root mass provided in wetlands help slow the flood flow velocities, which aids in reducing flood heights and erosion. The capacity of wetlands to retain rainwater and runoff also provides for water filtration during flood events by trapping sediment.

Wetlands also contribute to carbon sequestration, which is the capture and storage of carbon dioxide and other elements and gasses (USGS, 2021). All wetlands sequester carbon through photosynthesis and by trapping runoff. The actual amount of carbon storage of wetlands is affected by wetland type, size, vegetation, soils, and other factors (MNBWSR, 2019).

FWs comprise the vast majority of the wetland impacts for the project and are identified as possible FW (PFW) impacts are summarized below in **Table 2** for each alternative. Although PFWs are almost void of natural successional vegetation and less waste grain being a major goal of farming, some of the ecological benefits of PFWs include providing seasonal grain field foraging areas, temporary flooded field wildlife habitat, flood storage, and water filtration area. Numerous waterfowl species and wading birds frequent grain fields during crop production and offseason months for both foraging and stopover habitat during migration (AGFC, 2020).

#### 3.3 Environmental Effects

#### **Streams**

Alternatives 2 and 3 contain ephemeral, intermittent, and perennial stream systems, all of which have been channelized or rerouted in the past, with the exception of the Black River and Murray Creek. Alternatives A, B, and C contain ephemeral and intermittent stream systems. **Table 2** summarizes the quantities of those water resources located within the ROW of each action alternative. The streams naming convention as indicated in **Attachment A** includes the alternative number, followed by OW, and sequentially numbered (south to north).

Streams (LF) **Alternative** Perennial Intermittent **Ephemeral** Total Alternative 2 3,432 34,997 (7,180 ditched) 37,599 (36,432ditched) 76,028 Alternative 3 10,742 37,104 (5,161 ditched) 53,891 (50,149) 101,737 Alternative A 0 847 9,346 8,499 (8,499 ditched) 7,898 Alternative B 0 1,340 6,558 (6,558 ditched) Alternative C 0 8,102 4,731 3,371 (3,371 ditched)

**Table 2: Summary of Streams within Alternative Footprints** 

#### Wetlands

Wetland impacts were evaluated based on the acreage of anticipated wetland loss. The emergent and scrub-shrub wetlands identified within the action areas have been directly or indirectly impacted in the past and are therefore considered partially impaired or partially functional. Forested wetland areas with the action alternatives appear to be relatively fully functional, although they may be influenced by offsite sediment runoff from adjacent farm fields. Direct wetland impacts include fill for embankment, temporary clearing, and grading. All action alternatives were determined to have

Chapter 3
Streams and Wetlands



wetlands of varying classifications and therefore the ecological impact for each alternative are similar in varying degrees as discussed in this section. Wetland impacts (including impacts to FW) include reductions in flood storage, water quality filtration area, wildlife foraging and nesting habitat, and aquatic ecology. **Table 3** provides a summary of the acreages of each wetland type found within the ROW of the action alternatives.

**Table 3: Summary of Open Water and Wetlands within Alternative Footprints** 

Alternative	Wetlands (Acres)*							
Aiternative	PEM	PSS	PFO	PUB	PFW	Total		
Alternative 2	5.8	0.7	30.5	0.3	599.1	636.4		
Alternative 3	2.0	2.9	19.7	0.9	552.3	577.7		
Alternative A	0.6	0	2.8	0.1	58.7	62.2		
Alternative B	0.3	0	10.0	0	30.8	41.1		
Alternative C	0	0	2.1	0	25.0	27.1		

<sup>\*</sup>PEM-Emergent Wetland; PSS-Scrub-Shrub Wetlands; PFO-Forested Wetland; PUB-Pond/Open Water Wetlands; PFW-Possible Farmed Wetlands; These are estimates since USDA records are not releasable unless permission from landowner is granted.

#### No Action Alternative

The No Action Alternative would have no effects on water resources beyond what would be proposed for improvements deemed necessary by governing officials.

#### Alternative 2

#### Streams

Alternative 2 could have direct impacts to an estimated 76,028 LF of streams (other waters), approximately 43,612 LF would be considered intermittent or ephemeral ditches. Direct impacts to streams could include filling, grading, culvert installation, channel realignment, and channel widening improvements. Indirect stream impacts related to threatened and endangered species, migratory birds, terrestrial wildlife, aquatic environments, and water quality are discussed in separate technical reports prepared for the EIS. A summary of stream impacts per classification is provided in **Table 2**.

Notable stream impacts of Alternative 2 are associated with an intermittent paralleling stream (20W110 - located just west of Corning and shown on Sheets 20 and 21 of **Attachment A**) and the crossing associated with the Black River (20W48 - located just west of approximately 3 miles east of the Pocahontas Municipal Airport and shown on Sheet 8 of **Attachment A**). Approximately 2,281 LF of 20W110 flows through the Alternative 2 footprint in an almost parallel state. The Black River is proposed to be crossed with a perpendicular crossing and spanned by a new bridge; however, the potential for bridge piers to be placed within the OHWM of the river. Pier placement will be determined upon further design. Stream impacts are detailed in **Attachment E** and include location, and classifications of each stream segment within the proposed ROW footprint of Alternative 2.

#### Wetlands

Alternative 2 would directly impact an estimated 37.3 acres of emergent, forested, and pond or open water wetlands. Additionally, an estimated 599.1 acres of PFW would be impacted by Alternative 2. Overall wetland impacts would decrease the acreages available to wildlife for breeding, nesting, foraging and stopover habitat, as well as flood storage and water infiltration area. Direct impacts to wetlands would occur as a result of direct fill for embankment construction, temporary clearing, and grading. **Table 3** provides a summary of the wetland impacts for Alternative 2. Indirect impacts would include sedimentation from runoff during construction and fragmentation of wetlands, which might

Chapter 3
Streams and Wetlands



alter hydrologic connections to downstream waters. Indirect impacts could also include decreased stormwater capacity and reduction in surface water infiltration.

**Attachment F** provides details of potential wetland impacts identified within Alternative 2 and includes the specific locations, classification, and acreage of impacts.

Potential impacts to water quality resulting from stormwater runoff during construction were also assessed. Temporary, short-term impacts to surface waters within the disturbed areas may occur from stormwater runoff during construction. These impacts, which may occur as a result of increased sedimentation and offsite siltation resulting from land disturbance, may temporarily decrease water quality. However, these impacts are not anticipated to be significant as BMP measures would be implemented.

#### Alternative 3

#### Streams

Alternative 3 could directly impact an estimated 101,737 LF of streams, approximately 55,310 LF would be considered intermittent or ephemeral ditches. Direct and indirect impacts include those identified in Alternative 2. A summary of LF of stream impacts per classification is provided in **Table 2**.

Notable stream impacts associated with Alternative 3 as identified in **Attachment A** include a paralleling perennial stream (30W106 - located just northeast of Knobel and shown on Sheet 39 of **Attachment A**), an intermittent stream (30W136 - located just west of Corning and shown on Sheets 20 and 21 of **Attachment A**), and the crossing associated with the Black River (30W118 - located southwest of Corning and shown on Sheet 41 of **Attachment A**). Typical intermittent stream systems flowing through the alternative footprint range from five feet in width to 16 feet in width.

The Black River is the largest stream crossing in the alternative and its proposed crossing would be relatively perpendicular with a new span bridge. Potential bridge piers could be placed within the OHWM of the River, which will be determined upon further design. Approximately 421 LF of the river is located within the alternative footprint and could be directly impacted as a result of direct fill, pier placement, and/or temporary work road construction. The OHWM associated with the Black River is estimated at 208 LF in width and ranges from four feet to greater than 10 feet in depth. Additional details, such as location, stream classification, and estimated impacts of each stream segment, are provided in **Attachment E**.

#### Wetlands

Alternative 3 would directly impact an estimated 25.4 acres of emergent, scrub-shrub, forested, and pond/open water wetlands. Additionally, an estimated 552.3 acres of PFW would be impacted. Direct and indirect impacts include those identified in Alternative 2. **Table 3** provides a summary of the wetland and open water impacts for Alternative 3.

**Attachment F** provides a detailed summary of the wetlands and open water areas identified within the alternative and includes the specific locations, classification, and acreage of impacts.

#### Alternative A

#### Streams

Alternative A would impact approximately 9,346 LF of streams, of which 8,499 LF would be considered ditched. Approximately 847 LF of an intermittent stream, Hobson Lateral (AOW14), and six OWs would be impacted. Hobson Lateral has been redirected from its natural course, channelized, and does

Chapter 3 24



25

not have a riparian zone. The proposed crossing would be almost perpendicular to the stream's orientation, which would minimize impacts to the water course. Alternative A would also impact several man-made ditches as noted above that are associated with road crossings and field divisions. Direct and indirect impacts include those identified in Alternative 2.

#### Wetlands

Alternative A would impact approximately 3.4 acres of forested and emergent wetlands, and an estimated 58.7 acres of PFW. Direct and indirect impacts include those identified in Alternative 2. Indirect impacts could include off-site sedimentation resulting from construction activities, decreased stormwater capacity and reduction in surface water infiltration.

#### Alternative B

#### Streams

Alternative B is parallel to and would impact an estimated 1,340 LF of Hobson Lateral (BOW17). Approximately 6,558 LF of ephemeral man-made ditches are present within Alternative B, most of which are associated with existing roadside ditches along Hwy. 67. Direct and indirect impacts include those identified in Alternative 2.

#### Wetlands

Alternative B would impact an estimated 0.3 acre of a PEM wetland and 10.0 acres of PFO wetlands. Approximately 30.8 acres of PFW would be impacted. Direct and indirect impacts include those identified in Alternative 2. Indirect impacts could include off-site sedimentation resulting from construction activities, decreased stormwater capacity and reduction in surface water infiltration.

#### Alternative C

#### Streams

Alternative C would impact approximately 8,102 LF of stream, of which 3,371 LF would be considered ephemeral man-made ditches associated with roadside ditches and field divisions. Alternative C is parallel to and would impact approximately 4,731 LF of Moark Ditch (COW9), Cypress Creek Ditch (COW5), and other intermittent streams located within the alternative. Direct and indirect impacts include those identified in Alternative 2.

#### Wetlands

Alternative C would impact approximately 2.1 acres of a forested wetland located near Clay County Road 155 and approximately 25.0 acres of PFW. Direct and indirect impacts include those identified in Alternative 2. Indirect impacts could include off-site sedimentation resulting from construction activities, decreased stormwater capacity and reduction in surface water infiltration.

#### 3.4 Avoidance, Minimization, and Mitigation

The overall study area was first evaluated to identify large, 1,000-foot-wide corridors. Within the larger corridors, environmental and other constraining resources were identified, which allowed for further avoidance to narrow the corridors to 400-foot-wide ROW footprints. Avoidance measures evaluated during alternative alignment corridor selections included consideration for paralleling streams and larger forested wetlands. Minimization measures for streams and wetlands included spanning streams, installation of culverts to keep wetlands hydrologically connected, and incorporating perpendicular stream crossings where possible. Additional minimization measures considered as design progresses include reducing construction impacts and using a divided median

Chapter 3



and/or cable median barriers rather than concrete barriers for the approaches and crossings of wetlands and streams.

Avoiding impacts to all streams and wetlands is not practical. Any impacts to streams and wetlands would be minimized to the extent practicable; however, unavoidable impacts would be mitigated at an approved stream and wetland mitigation site(s) or through on-site permittee responsible mitigation. Compensatory mitigation shall be determined according to USACE approved methodology during the Section 404 permitting process. As overall impacts to streams and wetlands are likely to exceed Section 404 Nationwide permit impact thresholds, a Section 404 Individual permit would be required. Submittal of a Section 404 permit application is anticipated to occur in 2023.

For work in or over the Black River, a Section 10 permit (USACE) will be required.



## Chapter 4 – Floodplains

## 4.1 Regulatory Context, Methods, and Data Sources

The protection of floodplains and floodways is required by Executive Order 11988, Floodplain Management; U.S. DOT Order 5640.2, Floodplain Management and Protection; and 23 Code of Federal Regulations 650. The intent of these regulations is to avoid or minimize, where practicable, encroachments within the 100-year (base) floodplain and to avoid supporting land use development that is incompatible with floodplain values.

Floodplains are areas that become covered by water in a flood event. A 100-year floodplain would be covered by a flood event that has a 1% chance of occurring (or being exceeded) each year, and is the category commonly used for insurance and regulatory purposes. Floodplains have many natural and beneficial values. Floodplain beneficiaries include, but are not limited to, fish, wildlife, plants, open space, natural beauty, scientific study, outdoor recreation, agriculture, aquaculture, forestry, natural moderation of floods, water quality, maintenance, and groundwater recharge.

In order to provide a national standard without regional discrimination, the 100-year flood has been adopted by the Federal Insurance and Mitigation Administration as the base flood for purposes of floodplain management measures. The 500-year flood is used to indicate additional areas of flood risk in the community. Encroachment on floodplains, such as placement of fill material, has the potential to reduce the flood-carrying capacity, increases the flood heights of streams, and increases flood hazards in areas beyond the encroachment itself. Under the concept used by the National Flood Insurance Program (NFIP), the area of the 100-year flood is divided into a floodway and a floodway fringe. The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so the 100-year flood may be carried without substantial increases in flood heights. The floodway fringe is the remaining portion of the floodplain outside of the regulated floodway. The NFIP permits up to a 1.0-foot rise in water surface elevation for the 100-year flood, provided that hazardous velocities are not produced.

Clay, Greene, Randolph, and Lawrence Counties participate in the NFIP. The NFIP establishes the Flood Insurance Rate Maps (FIRM), which correspond to the Flood Insurance Study Reports (FIS) that establish the 100-year recurrence flood elevation on flooding sources. The FIRMs are used to make flood insurance available for homes within the 100-year flood boundary. The FIRMs, Flood Hazard Boundary Maps, and National Flood Hazard Layer for GIS were obtained for these communities. The ROW footprint of each action alternative used to determine the anticipated area of floodplain impacts. Alternatives were analyzed for total floodplain area and stream crossings impacted.

Levees, which reduce flood risks for people and property, are present within the project extent and are civil works projects constructed by and under the jurisdiction of the USACE. The USACE civil works projects are embedded within many communities and may need to be altered or occupied by others for purposes of improvements, relocation, or other non-project features. To ensure that these projects continue to provide their intended benefits to the public, Congress has mandated that any use or alteration of a civil works project by another party is subject to approval of USACE. This requirement was established in Section 14 of the Rivers and Harbors Act of 1899 and is codified at 33 USC 408 (Section 408). Section 408 provides that USACE may grant permission for another party to alter a civil works project upon a determination that the alteration proposed will not be injurious to the public interest and will not impair the usefulness of the civil works project. Therefore, as the levees within the project extent are regulated under Section 408, review and encroachment permission under Section 408 would be required for impacts to the federal levee projects to ensure that the proposed



roadway project would not be injurious to the public interest and the levees would continue to function as intended.

The data sources used for this evaluation are:

- 1. Federal Emergency Management Agency (FEMA). August 3, 2016, Flood Insurance Study, Clay County, Arkansas and Incorporated Areas. 41 pages. Available online at: https://msc.fema.gov/portal
- 2. Federal Emergency Management Agency (FEMA). May 16, 2013, Flood Insurance Study, Greene County, Arkansas and Incorporated Areas. 37 pages. Available online at: https://msc.fema.gov/portal
- 3. Federal Emergency Management Agency (FEMA). December 18, 2012, Flood Insurance Study, Lawrence County, Arkansas and Incorporated Areas. 38 pages. Available online at: https://msc.fema.gov/portal
- 4. Federal Emergency Management Agency (FEMA). May 2, 2012, Flood Insurance Study, Randolph County, Arkansas and Incorporated Areas. 30 pages. Available online at: https://msc.fema.gov/portal
- 5. National Flood Hazard Layer. Available online at: http://www.https://www.fema.gov/flood-maps/national-flood-hazard-layer
- 6. The National Levee Database (USACE, 2016) and USACE correspondence.

## 4.2 Existing Conditions

There are several streams, creeks, tributaries, rivers, and their corresponding floodplains that occur within the ROW footprints of the action alternatives. Floodplains surrounding the action alternatives are shown in **Figure 6**. The roadway encroachments can be categorized as two different types, transverse or longitudinal. Transverse encroachments cross perpendicular to the direction of flow in the floodplain (often crossing the stream that is conveying the flow). Transverse encroachments are likely to require a hydraulic structure (e.g., a bridge) to mitigate flooding impacts upstream of the encroachment due to blocking the floodplain in the direction of flood propagation. Longitudinal encroachments run parallel to the flow direction of the floodplain and are associated with storage loss within the floodplain. Longitudinal encroachment mitigation is dependent on the area of storage loss and any tributaries that are contributing to the floodplain nearby.

Three levees occur in the project vicinity, each belonging to one of the following levee systems: Running Water Levee District, Western Clay Drainage District, and Big Gum Drainage District. No other USACE civil works projects occur within or near the alternative footprints. The primary purpose of all three levees is flood risk reduction and each are USACE civil works projects and would require a Section 408 review if the proposed project crosses them. Each of these levees and their associated protected areas (i.e., leveed areas) are shown in **Figure 6** and details on each are provided below.

The Running Water Levee District system is a federally authorized non-federally operated and maintained rural flood protection project. The USACE constructed this levee in 1938 and turned it over to a public sponsor, the Running Water Levee District, which is responsible for operations and maintenance. The minimum height for the levee is 3.0 feet, the maximum is 11.0 feet, and the average is 7.0 feet. The Running Water Levee District Levee System serves as flood damage reduction for about 65,000 acres of primarily agricultural land within the unincorporated Randolph County protected area. The Running Water Levee System is located south of, and on the left bank of, the Black River. The system segment is 8.7 miles in total length, is comprised entirely of earthen levee, and has a leveed area of 23.51 square miles. This levee system currently has an active USACE rehabilitation status.



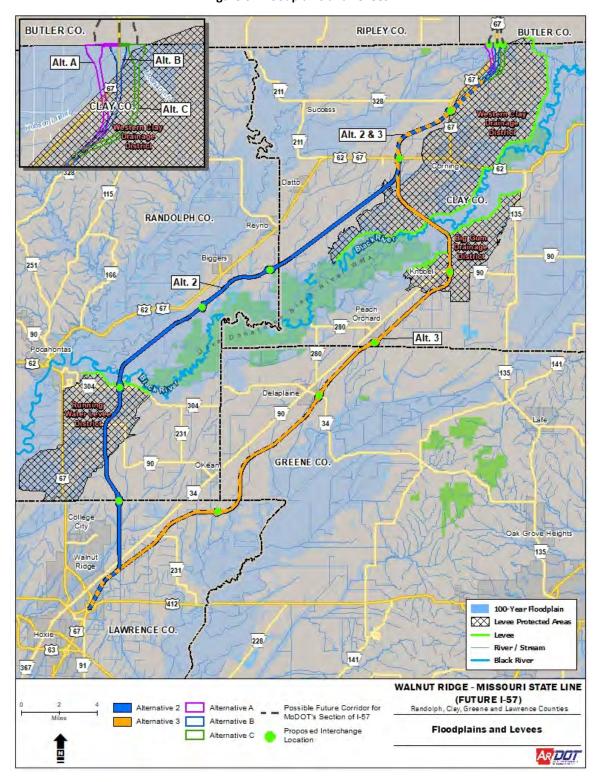


Figure 6: Floodplains and Levees




The Western Clay levee system is a federally authorized non-federally operated and maintained rural flood protection project. The USACE constructed this levee in 1940 and turned it over to a public sponsor, the Western Clay Drainage District, which is responsible for operations and maintenance. The minimum height for the levee is 8.5 feet, the maximum is 18.2 feet, and the average is 13.3 feet. The levee system serves to protect the Town of Corning within Clay County and is located northwest of, and on the right bank of, the Black River. The system is 22.5 miles in total length, is comprised entirely of earthen levee, and has a leveed area of 43.01 square miles. This levee system currently has an inactive USACE rehabilitation status.

The Big Gum Drainage District system is comprised of two segments: the Big Gum Railroad Embankment segment and the Big Gum Drainage District segment. The proposed project crosses the Big Gum Railroad Embankment segment, which was locally constructed and is locally operated and maintained by Union Pacific Railroad. At the time of construction in 1940, the levee system was intended to provide protection from floods having a crest elevation three feet higher than a confined 1927 flood on the Black River. The minimum height for the Big Gum Railroad Embankment segment is 12.0 feet, the maximum is 16.0 feet, and the average is 14.0 feet. The Big Gum system, along with the Central Clay (located further northeast) and Western Clay levee systems, primarily serves as flood damage reduction for 175,000 acres of primarily agricultural land, including scattered farmsteads and the towns of Corning and Knobel, Arkansas. Within the protected areas are highways, major streets, residential, commercial, and industrial properties. Failure of the Big Gum system would result in the flooding of Knobel, causing property damage and potential loss of life. The Big Gum Drainage District system is located south of, and on the left Bank of, the Black River. The entire 8.8-mile system is constructed of compacted earthen fill, consists of both new levee and an existing levee, which date of construction and dimensions are unknown., and has a leveed area of 12.47 square miles. This levee system currently has an active USACE rehabilitation status.

No documentation was readily available to determine whether the three levees within the alternative footprints are certified or accredited levees. If these levees are not accredited, it could be because they currently have a freeboard deficiency or because the community has not submitted an application for them to be accredited. Freeboard is the distance between the 100-year flood event water surface elevation and the elevation of the top of the levee. As shown in **Figure 7**, a levee is freeboard deficient if it does not meet the minimum freeboard standard of 3 feet above the base flood (100-year) water surface elevation as required by 44 CFR 65.10(b)(1)(i). Furthermore, 44 CFR 65.10 also requires an additional 1 foot of freeboard above the minimum if within 100 feet of a structure such as bridge.

Figure 7: Example of a Levee that has a Freeboard Deficiency

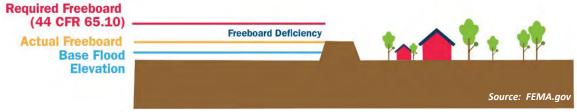

Even a bridge with only the piers inside the levee could cause a water surface rise and the levee to be freeboard deficient. The final design of the proposed project would need coordination with the levee boards to get the as-built plans for the levees in order to verify their designed freeboard and determine if there is any room for water surface elevation increases.



#### 4.3 Environmental Effects

#### No Action Alternative

The No Action Alternative would not affect any floodplains.

#### Alternative 2

Alternative 2 crosses through Clay, Randolph, and Lawrence Counties in northeastern Arkansas. The total project area for Alternative 2 with a 400-foot-wide footprint is 2,249 acres. Current mapping indicates that Alternative 2 would encroach on approximately 8.7 miles and approximately 423.1 acres of Zone A floodplain, which is 18.8% of the total area within its proposed ROW footprint. Alternative 2 floodplain impacts affect 15 different areas with nine transverse and six longitudinal encroachments. The individual crossing impact locations are quantified in **Table 4**.

Alternative 2 has the potential to encroach on approximately 5.9 acres of Zone A floodplains in Clay County. These floodplains are associated with three different waterbodies covering a total length of approximately 0.15 mile. There are a total of two transverse encroachments and one longitudinal encroachment, totaling three encroachments in Clay County.

Alternative 2 has the potential to encroach on approximately 362.4 acres of Zone A floodplains in Randolph County. These floodplains are associated with nine different waterbodies covering a total length of approximately 7.5 miles. There are five transverse encroachments and five longitudinal encroachments, totaling 10 encroachments in Randolph County.

Alternative 2 has the potential to encroach on approximately 54.8 acres of Zone A floodplains in Lawrence County. These floodplains are associated with two different waterbodies covering a total length of approximately 1.1 miles. There are two transverse encroachments in Lawrence County.

Table 4: Alternative 2 Area and Length of Potential Zone A Floodplain Impacts

Country	River/Creek/Ditch/Lateral/Tributary	Type*	Floodplain Impact		
County	Associated with Floodplain		Area (acres)	Length (miles)	
Lawrence	Trib of Little Village Creek Ditch	T	21.13	0.43	
Lawrence	Village Creek	T	33.72	0.68	
Randolph	Tupelo Ditch	L	1.48	0.09	
Randolph	Big Running Water Creek	Т	9.26	0.19	
Randolph	Cypress Lateral	T	33.47	0.68	
Randolph	Black River	Т	302.62	6.07	
Randolph	Black River	L	2.73	0.12	
Randolph	Trib of Black River	L	0.24	0.03	
Randolph	Murray Creek Ditch	L	0.31	0.04	
Randolph	Trib of Murray Creek Ditch	L	0.31	0.03	
Randolph	Murray Creek Ditch	T	7.34	0.15	
Randolph	Trib of Black River	T	4.64	0.04	
Clay	Trib of Cypress Creek Ditch	Т	2.71	0.06	
Clay	Trib of Cypress Creek Ditch	Т	2.24	0.04	
Clay	Trib of Cypress Creek Dich	L	0.94	0.05	
		Total	423.13	8.71	

<sup>\*</sup>T = Transverse Encroachment L = Longitudinal Encroachment



Alternative 2 also crosses one levee associated with the Running Water Levee District in Randolph County, approximately 4 miles east of Pocahontas. This levee, which ties into Hwy. 304 roadway embankment near the proposed crossing, is not referenced by FEMA on the FIRM or FIS Report for Randolph County. The levee would most likely be spanned by a bridge.

#### Alternative 3

Alternative 3 crosses through Clay, Greene, Randolph, and Lawrence Counties in northeastern Arkansas. The total project area for Alternative 3 with a 400-foot-wide footprint is 2,337 acres. Alternative 3 would encroach on approximately 2.7 miles and approximately 117.5 acres of Zone A floodplain, which is 5.0% of the total area within its proposed ROW footprint. Alternative 3 floodplain impacts affect 10 different areas with seven transverse and three longitudinal encroachments. The individual crossing impact locations are quantified in **Table 5**.

Alternative 3 has the potential to encroach on approximately 90.1 acres of Zone A floodplains in Clay County. These floodplains are associated with five different waterbodies covering a total length of approximately 1.9 miles. There are five transverse encroachments in Clay County.

Alternative 3 has the potential to encroach on approximately 8.1 acres of Zone A floodplains in Greene County. These floodplains are associated with one waterbody covering a total length of approximately 0.2 mile. There is one transverse encroachment and one longitudinal encroachment, totaling two encroachments in Greene County.

Alternative 3 has the potential to encroach on approximately 19.4 acres of Zone A floodplain in Lawrence County. This floodplain is associated with two different waterbodies covering a total length of approximately 0.6 mile. There are three longitudinal encroachments in Lawrence County.

County	River/Creek/Ditch/Lateral/Tributary Associated with Floodplain	Type*	Floodplain Impacts		
County			Area (acres)	Length (miles)	
Lawrence	Beaver Dam Ditch	Т	6.77	0.14	
Lawrence	Beaver Dam Ditch	L	1.48	0.08	
Lawrence	Tupelo Slough	L	11.11	0.37	
Greene	Lateral No. 1	L	0.96	0.08	
Greene	Lateral No. 1	T	7.10	0.17	
Clay	Trib of Petersburg Ditch	T	1.42	0.04	
Clay	Petersburg Ditch	T	0.43	0.03	
Clay	Trib of Black River	T	1.62	0.03	
Clay	Black River	T	68.50	1.41	
Clay	Cypress Creek Ditch	T	18.12	0.38	
		Total	117.52	2.74	

Table 5: Alternative 3 Locations of Potential Zone A Floodplain Impacts

Alternative 3 also crosses two levees associated with the Western Clay Drainage District located on the west side of the Black River and the Big Gum Drainage District levee on the east side of the Black River (shown as the Black River West Bank Levee and the Black River East Bank Levee 1 on the FIRM panels). East of Corning, the Western Clay Drainage District levee ties into the Hwy. 62 roadway embankment and the Big Gum Drainage District levee ties into the Hwy. 135 roadway embankment. These levees are currently shown on the FEMA FIRM panels and documented in the FIS report as providing flood protection. Levees that are shown to provide flood protection are designed in accordance with a

<sup>\*</sup>T = Transverse Encroachment L = Longitudinal Encroachment



minimum freeboard. Based on available data, the impacted levees would need to be treated as a regulatory floodway and be developed with a no-rise condition to the 100-year flood event to prevent a decrease in the freeboard of the levee and possibly compromise the levee structure as freeboard deficient. FEMA defines a "regulatory floodway" as the channel of a river or other watercourse and the adjacent land areas that must be reserved in order to discharge the base flood without cumulatively increasing the water surface elevation more than a designated height.

#### Alternative A

Alternative A terminates at Hwy. 67 on the Arkansas-Missouri State line in Clay County on the west side of the existing Hwy. 67. The total project area for Alternative A with a 400-foot-wide footprint is 144 acres. Alternative A would encroach on approximately 0.87 mile and approximately 77.2 acres of Zone A floodplain, which is 53.5% of the total area within its proposed ROW footprint. This floodplain is associated with Hobson Lateral, which is a USGS-named stream that is part of the larger watershed of the Current River. There is one transverse encroachment in Clay County. No levees or other USACE civil works projects would be impacted by Alternative A.

#### **Alternative B**

Alternative B terminates at the Arkansas-Missouri State line in Clay County and is partially centered on the existing Hwy. 67. The total project area for Alternative B with a 400-foot-wide footprint is 139 acres. Alternative B would encroach on approximately 0.79 mile and approximately 67.2 acres of Zone A floodplain, which is 48.3% of the total area within its proposed ROW footprint. This floodplain is associated with Hobson Lateral which is part of the larger watershed of the Current River. There is one transverse encroachment in Clay County. No levees or other USACE civil works projects would be impacted by Alternative A.

#### **Alternative C**

Alternative C terminates at Hwy. 67 on the Arkansas-Missouri State line in Clay County on the east side of the existing Hwy. 67. The total project area for Alternative C with a 400-foot-wide footprint is 160 acres. Alternative C would encroach on approximately 0.68 mile and approximately 67.6 acres of Zone A floodplain, which is 42.3% of the total area within its proposed ROW footprint. Alternative C's ROW limits run parallel to the Moak Ditch channel and based on proposed ROW extents, could possibly require a channel change for approximately 1,900 feet. A channel change would occur when a roadway embankment fills in part of a parallel channel that does not cross the alignment. There is one transverse encroachment for Alternative C. No levees or other USACE civil works projects would be impacted by Alternative A.

### 4.4 Avoidance, Minimization, and Mitigation

The roadway would be designed to meet ARDOT, FHWA, and FEMA standards for drainage. Detailed hydrologic and hydraulic studies for multiple flood events would be done prior to final design to determine existing storm event peak discharges and stage-discharge relationships for each waterway and floodplain crossed by the roadway. The designated Special Flood Hazard Zone A affected area would require the establishment of base flood elevations (BFEs) for the impacted floodplains. Existing conditions would establish the baseline for design of the roadway drainage structures to mitigate drainage impacts of the roadway. Culverts and bridges would be designed to convey flow efficiently without causing impactful water surface elevations upstream. Roadway drainage features such as inlets, pipes, and ditches would be designed to outfall to existing streams without increasing downstream flows. Drainage analyses and designs would utilize detailed and modern hydrologic and hydraulic analysis methods and would account for the special challenges of flat topography within the



roadway corridor. The hydraulic analyses would also be used to design scour and erosion mitigation features..

Section 408 review by USACE would occur for each of the three levees within the Preferred Alternative and Section 408 approval/clearance would be obtained from USACE prior to project construction. Impacts to existing levees would be considered so the levees would continue to function as intended. The design team would coordinate with the USACE to obtain available data from previous hydrologic and hydraulic studies, particularly pertaining to the Black River levees. The proposed roadway would cross several established FEMA Zone A Special Flood Hazard Areas (SFHAs), including the combined Current River/Black River floodplain. The Zone A SFHAs will be analyzed to determine existing conditions BFEs for the floodplains. Coordination with Local Floodplain Administrators having jurisdiction over the FEMA SFHAs will determine allowable floodplain impacts of the roadway. Although the proposed roadway would not pass through the Dave Donaldson Black River Wildlife Management Area, coordination with AGFC would be established to obtain available hydrologic and hydraulic data for the WMA and to determine acceptable impacts of the roadway.



# Chapter 5 – References

#### 5.1 Acronyms

ADH Arkansas Department of Health

ANRC Arkansas Natural Resources Commission

APC&EC Arkansas Pollution Control and Ecology Commission

ARDOT Arkansas Department of Transportation

BFE Base Flood Elevations
BMP Best Management Practices
CFR Code of Federal Regulations

CWA Clean Water Act

DEQ Arkansas Division of Environmental Quality

EO Executive Order

EPA U.S. Environmental Protection Agency

ERW Extraordinary Resource Water

FEMA Federal Emergency Management Agency

FIRM Flood Insurance Rate Maps FIS Flood Insurance Study Reports

FW Farmed Wetlands HUC Hydrologic Unit Code

LF Linear Feet

LiDAR Light Detection and Ranging MGD Million Gallons Per Day

NASS National Agricultural Statistics Service NFIP National Flood Insurance Program

NPDES National Pollutant Discharge Elimination System

NRCS Natural Resources Conservation Service

NWI National Wetland Inventory OHWM Ordinary High Water Mark PC Prior Converted Croplands

ROW Right of Way
SP Special Provision

TMDL Total Maximum Daily Load
TSS Total Suspended Solids
USACE U.S. Army Corps of Engineers

USDA United States Department of Agriculture

USGS U.S. Geological Survey WHPA Wellhead Project Areas

#### 5.2 Literature Cited

Ackerman, D.J. 1996. Hydrology of the Mississippi River Valley Alluvial Aquifer, South-Central United States. Regional Aquifer System Analysis-Gulf Coastal Plain. U.S. Geological Survey Professional Paper 1416-D.

Arkansas Energy and Environment (AEE), Division of Environmental Quality (DEQ). Web Mapping Service. Accessed 2021. Available online at: https://www.adeq.state.ar.us



- Arkansas Game and Fish Commission (AGFC). Dave Donaldson Sees Improved Infrastructure for Ducks. October 21, 2021. https://www.agfc.com/en/news/2020/10/21/dave-donaldson-sees-improved-infrastructure-for-ducks/.
- Ausbrooks, S.M. and W.L. Prior. 2008. Depth to Groundwater in the Mississippi River Valley Alluvial Aquifer in Eastern Arkansas. Arkansas Geological Survey. 1 Sheet.
- Bailey, R.G., P.E. Avers, T. King, and W.H. McNab, Eds. 1994. Ecoregions and Subregions of the United States (map) (supplementary table of map unit descriptions compiled and edited by W.H. McNab and R.G. Bailey): Washington, D.C., U.S. Department of Agriculture Forest Service, scale 1:7,500,000.
- Bosswell, E.H., E.M. Cushing, and R.L. Hosman. 1968. Quaternary Aquifers in the Mississippi Embayment with a Discussion of Quality of the Water by H.G. Jeffery: U.S. Geological Survey Professional Paper 448-E, 15 p.
- Brown, Allen. 2021. Telephone communication with Allen Brown, Environmental Program Coordinator, Nonpoint Source Pollution Management Section, Arkansas Department of Agriculture, Natural Resources.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of Wetlands and Deepwater Habitats of the United States. U.S. Department of the Interior, Fish and Wildlife Service, Washington, D.C. Jamestown, ND: Northern Prairie Wildlife Research Center Online.
- Federal Emergency Management Agency (FEMA). August 3, 2016, Flood Insurance Study, Clay County, Arkansas and Incorporated Areas. 41 pages. Available online at: https://msc.fema.gov/portal
- FEMA. May 16, 2013, Flood Insurance Study, Greene County, Arkansas and Incorporated Areas. 37 pages. Available online at: https://msc.fema.gov/portal
- FEMA. December 18, 2012, Flood Insurance Study, Lawrence County, Arkansas and Incorporated Areas. 38 pages. Available online at: https://msc.fema.gov/portal
- FEMA. May 2, 2012, Flood Insurance Study, Randolph County, Arkansas and Incorporated Areas. 30 pages. Available online at: https://msc.fema.gov/portal
- FEMA. 2021. National Flood Hazard Layer website. Available online at: http://www.https://www.fema.gov/flood-maps/national-flood-hazard-layer
- FTN and Associates (FTN). 2006a. TMDL's for Turbidity for Bayou Deview and Cache River, AR. 136 pages.
- FTN and Associates (FTN). 2006b. TMDL's for Turbidity for Village Creek, AR. 82 pages.
- Google Earth. 3/4/1994 through 10/10/2018 Aerial Imagery. Accessed 2021. Software.
- Hart, R.M., B.R. Clark, and S.E. Bolyard. 2008. Digital Surfaces and Thicknesses of Selected Hydrogeologic Units within the Mississippi Embayment Regional Aquifer Study (MERAS): U.S. Geological Survey Scientific Investigations Report 2008–5098, 33 p.



- Harvey, E.J. 1980. Ground Water in the Springfield-Salem Plateaus of Southern Missouri and Northern Arkansas: U.S. Geological Survey Water-Resources Investigations 80–101, 66 p.
- Holland, T.W. 2007. Water Use in Arkansas, 2005: USGS Scientific Investigations Report 2007-5241, 32 p.
- Kresse, T.M., P.D. Hays, K.R. Merriman, J.A. Gillip, D.T. Fugitt, J.L. Spellman, A.M. Nottmeier, D.A. Westerman, J.M. Blackstock, and J.L. Battreal. 2014. Aquifers of Arkansas—Protection, Management, and Hydrologic and Geochemical Characteristics of Groundwater Resources in Arkansas: U.S. Geological Survey Scientific Investigations Report 2014–5149, 334 p. Available online at: http://dx.doi.org/10.3133/sir20145149
- Martin, Joe. 2021. Personal communication on June 4, 2021. Arkansas Division of Environmental Quality. Water quality contact, Branch Manager.
- Minnesota Board of Water and Soil Resources (MNBWSR). Carbon Sequestration in Wetlands. Access via: https://bwsr.state.mn.us/carbon-sequestration-wetlands
- Natural Resources Conservation Service (NRCS). Wetland Values and Trends, RCA Issue Brief #4. https://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/technical/nra/rca/
- NETRonline. Accessed 2021. Historic Aerials. Available online at: https://www.historicaerials.com
- Reba, M.L., N. Aryal, T.G. Teague, and J.H. Massey. 2020. Initial Findings from Agricultural Water Quality Monitoring at the Edge of Field in Arkansas. Journal of Soil and Water Conservation. Volume 75, No. 3. Pages 291-303.
- Richards, J.M., C.J. Rowden, and B.C. Rivers. 2018. Bathymetric Survey Data of the Black River from Poplar Bluff, Missouri, to Pocahontas, Arkansas: U.S. Geological Survey data release. Available online at: https://doi.org/10.5066/P92TYPX5.
- Schrader, T.P. 2015. Water Levels and Water Quality in the Mississippi River Valley Alluvial Aquifer in Eastern Arkansas, 2012. Scientific Investigations Report 2015-5059. 70 p.
- Standard Methods. 1999. Standard Methods for the Examination of Water and Wastewater. 20th Edition. Published by American Public Health Association, American Water Works Association, and Water Environment Federation.
- U.S. Army Corps of Engineers (USACE). 1987. U.S. Army Corps of Engineers Wetlands Delineation Manual. Technical Report Y-87-1. Vicksburg, Mississippi.
- USACE. 2010. Regional Supplement to the Corps of Engineers Wetland Delineation Manual: Atlantic and Gulf Coastal Plain (Version 2.0), ed. J. S. Wakeley, R. W. Lichvar, and C. V. Noble. ERDC/EL TR-10-16. Vicksburg, MS: U.S. Army Engineer Research and Development Center.
- USACE. 2016. National Levee Database. Website Version 3.6.0, API Version 3.6.0, a USACE and FEMA partnership. Dataset last updated: Jun 29, 2021 22:18:24. Available online at: https://levees.sec.usace.army.mil/#/



- U.S. Department of Agriculture (USDA), Economic Research Service. 2019. Irrigation and Water Use. Available online at: https://www.ers.usda.gov/topics/farm-practices-management/irrigation-water-use/
- USDA, National Agricultural Statistics Service (NASS). March 1, 2021. Available online at: http://www.nass.usda.gov/Statistics\_by\_State/Arkansas/index.php
- USDA, Natural Resources Conservation Service (NRCS). Accessed 2021. Field Office Technical Guide (FOTG). Available online at: http://efotg.sc.egov.usda.gov
- USDA, NRCS. Amended 4, January 2017. Subpart A Wetland Determination and Delineation of M\_180\_NFSAM\_514\_A. Available online at: https://directives.sc.egov.usda.gov/viewerFS .aspx?hid=40307
- USDA, NRCS. Accessed 2021. List of Hydric Soils. Available online at: http://www.nrcs.usda.gov
- USDA, NRCS. Accessed 2021. Wetlands Reserve Program. Available online at: http://www.nrcs.usda.gov
- USDA, NRCS, Soil Survey Staff. 2021. Web Soil Survey. Available online at: https://websoilsurvey.sc.egov.usda.gov/. Accessed 2021.
- USDA, NRCS. Soil Survey of Clay County. July 1978.
- USDA, NRCS. Soil Survey of Greene County. December 1969.
- USDA, NRCS. Soil Survey of Lawrence County. June 1978.
- USDA, NRCS. Soil Survey of Randolph County. April 1980.
- USDA, NRCS. 2019. The PLANTS Database (http://plants.usda.gov). National Plant Data Team, Greensboro, NC 27401-4901 USA.
- USDA, NRCS. 2010. Food Security Act. Wetland Identification Procedures.
- USDA, U.S. Forest Service (USFS). Bottomland Hardwoods of the Mississippi Alluvial Valley: Characteristics and Management of Natural Function, Structure, and Composition. October 28, 1995.
- U. S. Fish and Wildlife Service (USFWS). National Wetlands Inventory website. U.S. Department of the Interior, Fish and Wildlife Service, Washington, D.C. Available online at: https://www.fws.gov/wetlands/data/mapper.html. Accessed 2021.
- USFWS. 2012. Five Things You Need to Know About Wetlands. U.S. Department of the Interior, Fish and Wildlife Service, Washington, D.C. Available online at: https://www.fws.gov/story/2012-02/five-things-you-need-know-about-wetlands. Accessed 2021.
- U.S. Geological Survey (USGS). 2021. Mississippi Embayment Aquifer System Regional Groundwater Availability Study, Water Use Interactive Map. Available online at: https://www2.usgs.gov/water/lowermississippigulf/lmgweb/meras/wateruse.html




USGS. 2021. Wetland Word: Sequestration. Available online at: https://www.usgs.gov/news/wetland-word-sequestration


USGS. Accessed 2021. Historic Topographic Map Explorer. Available online at: https://livingatlas.arcgis.com/topoexplorer/





# ATTACHMENT A — DETAILED WATER RESOURCES WITHIN THE ALTERNATIVE FOOTPRINTS




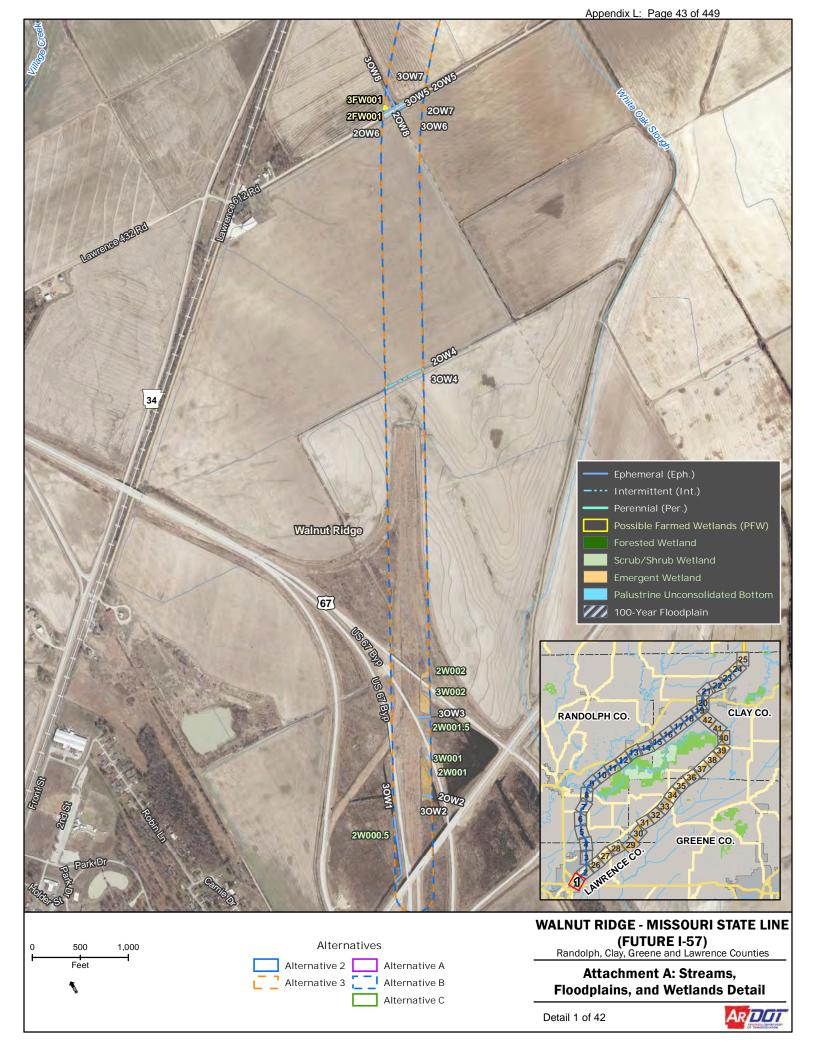


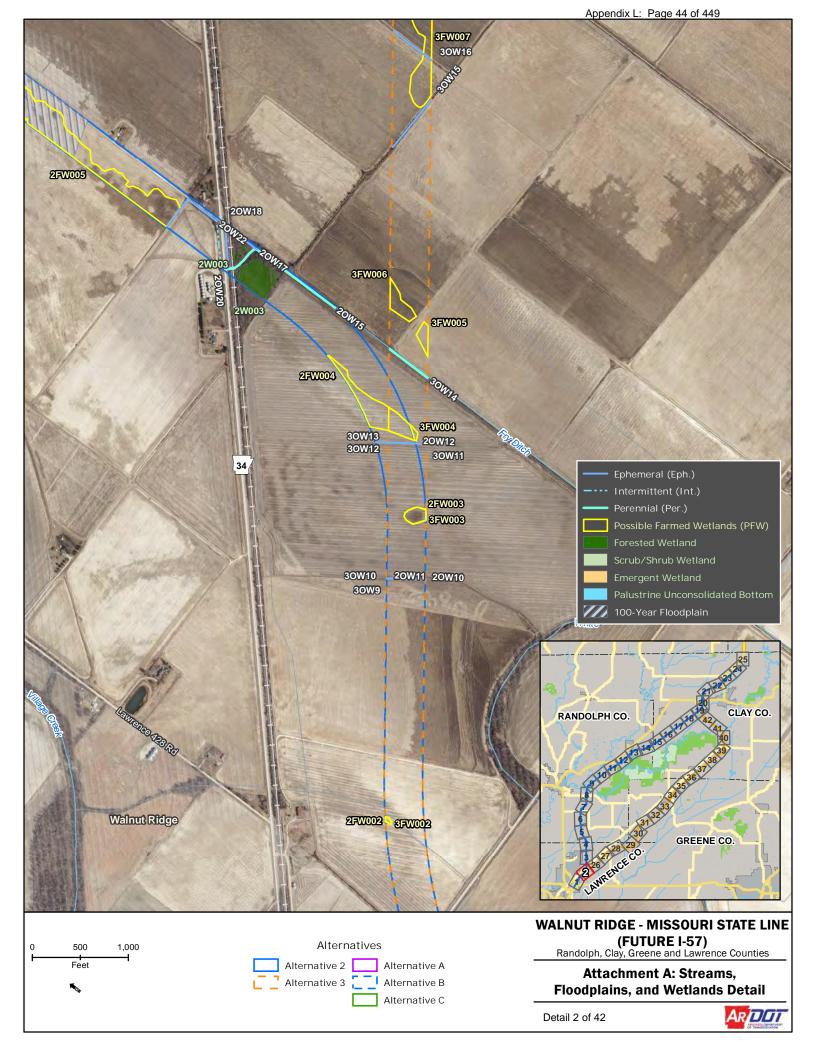


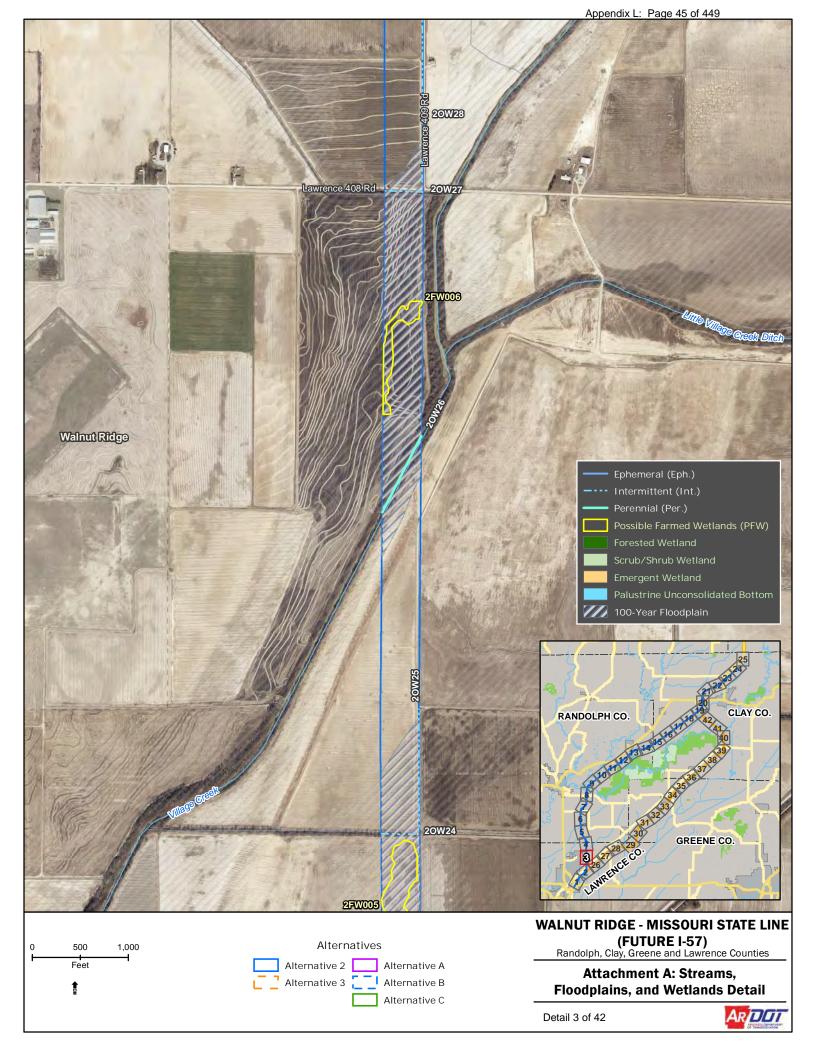


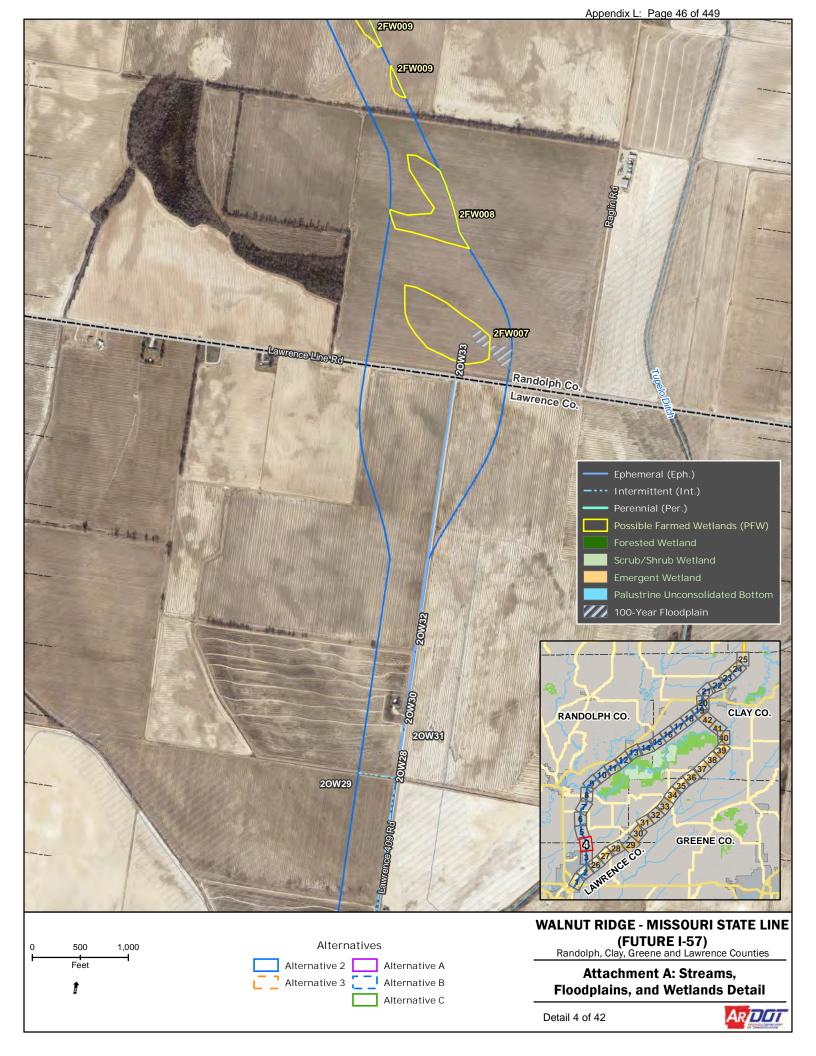


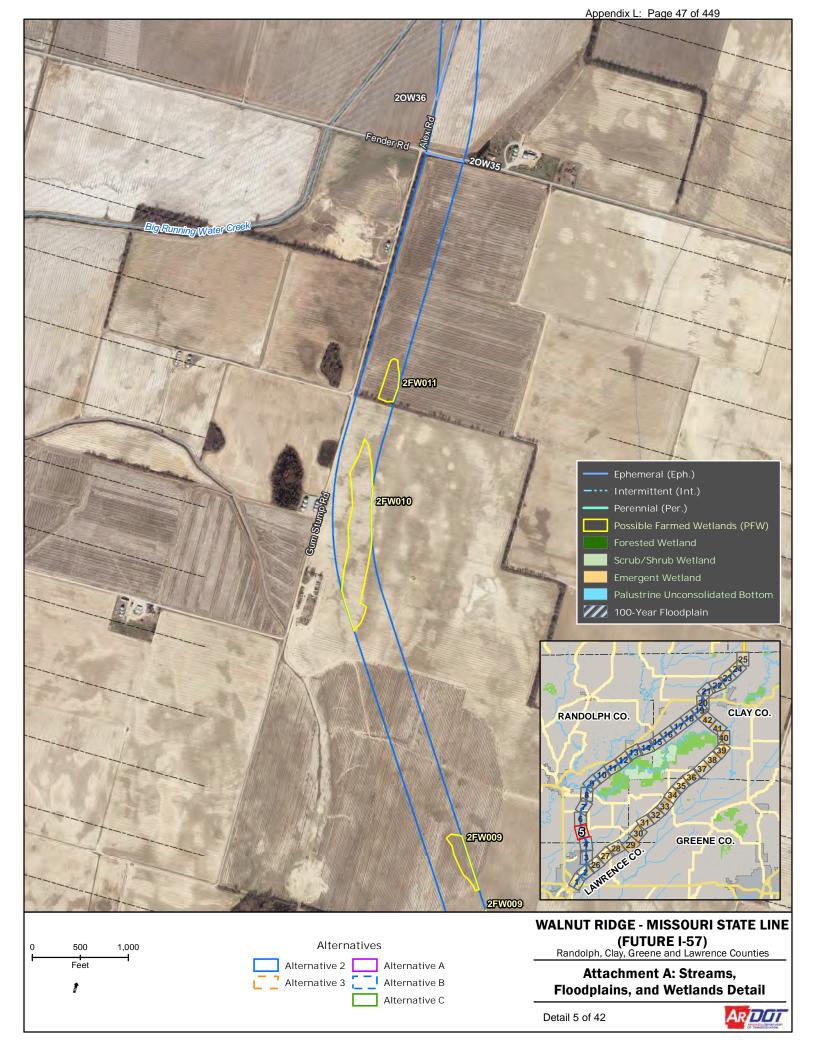


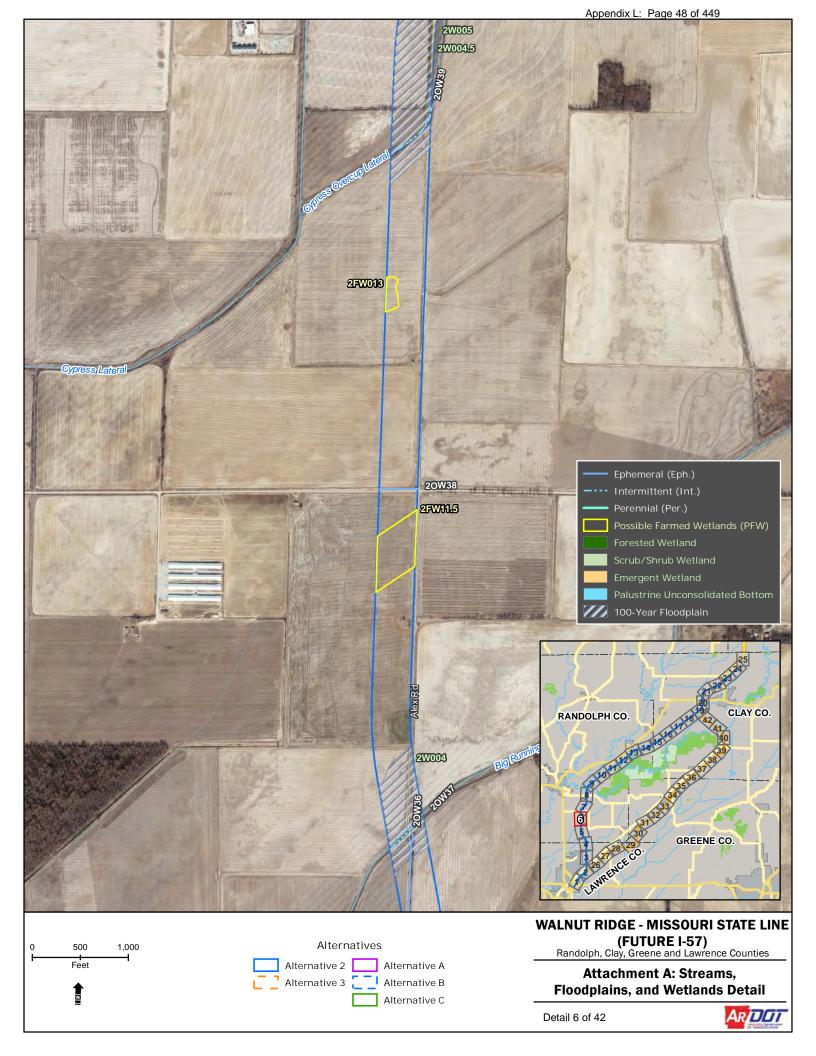


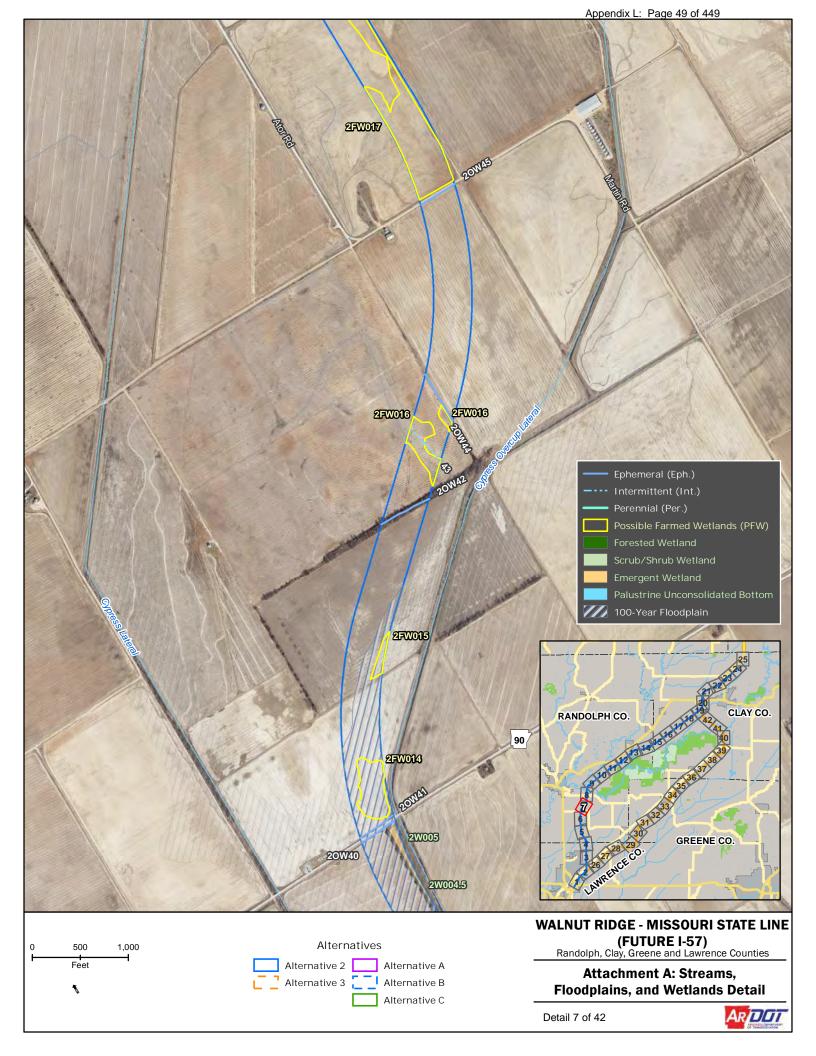


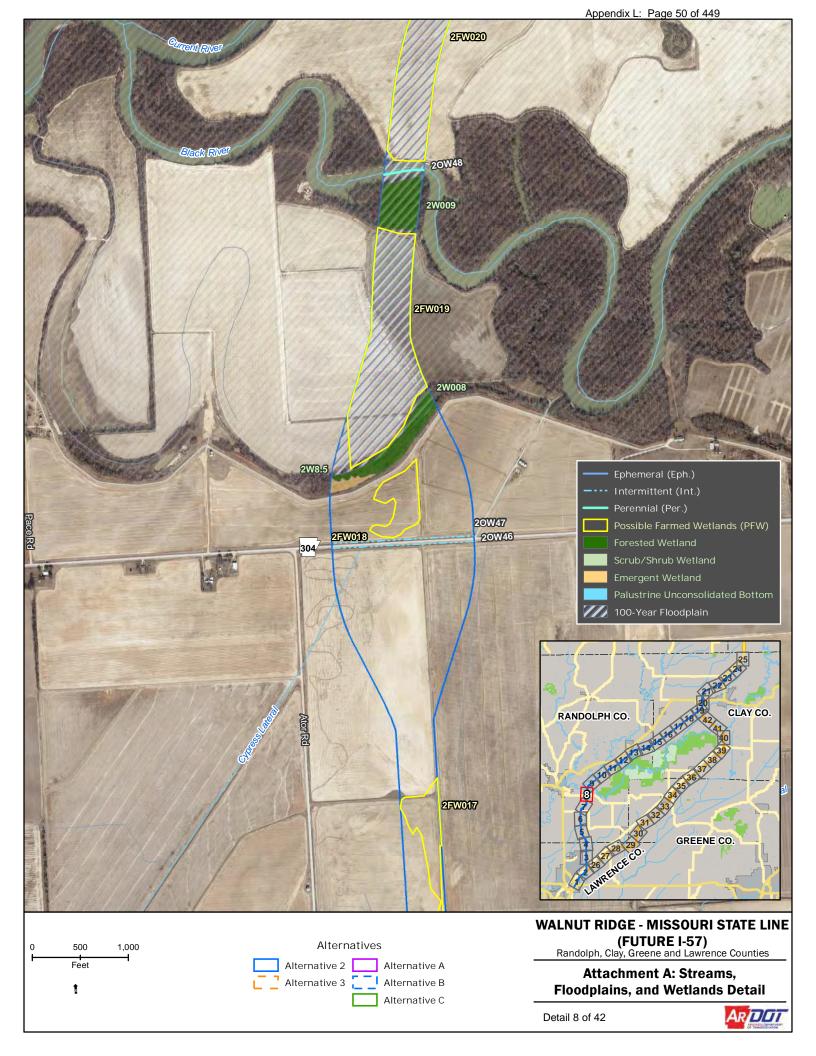


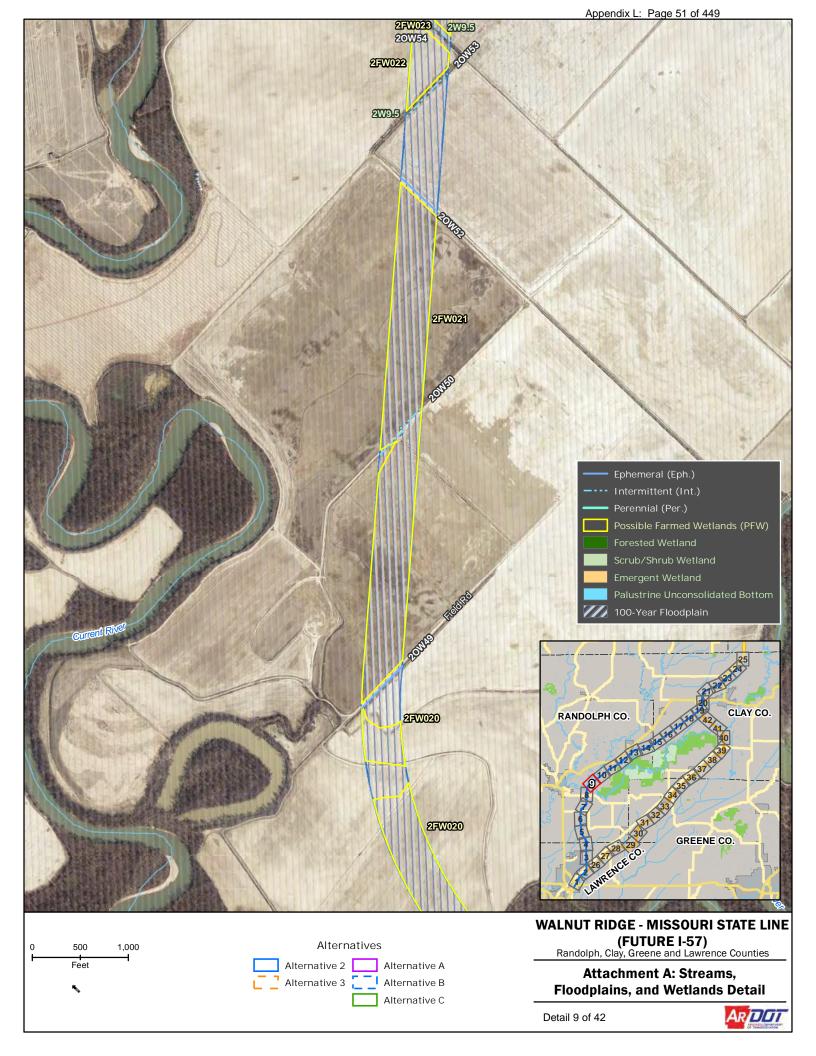


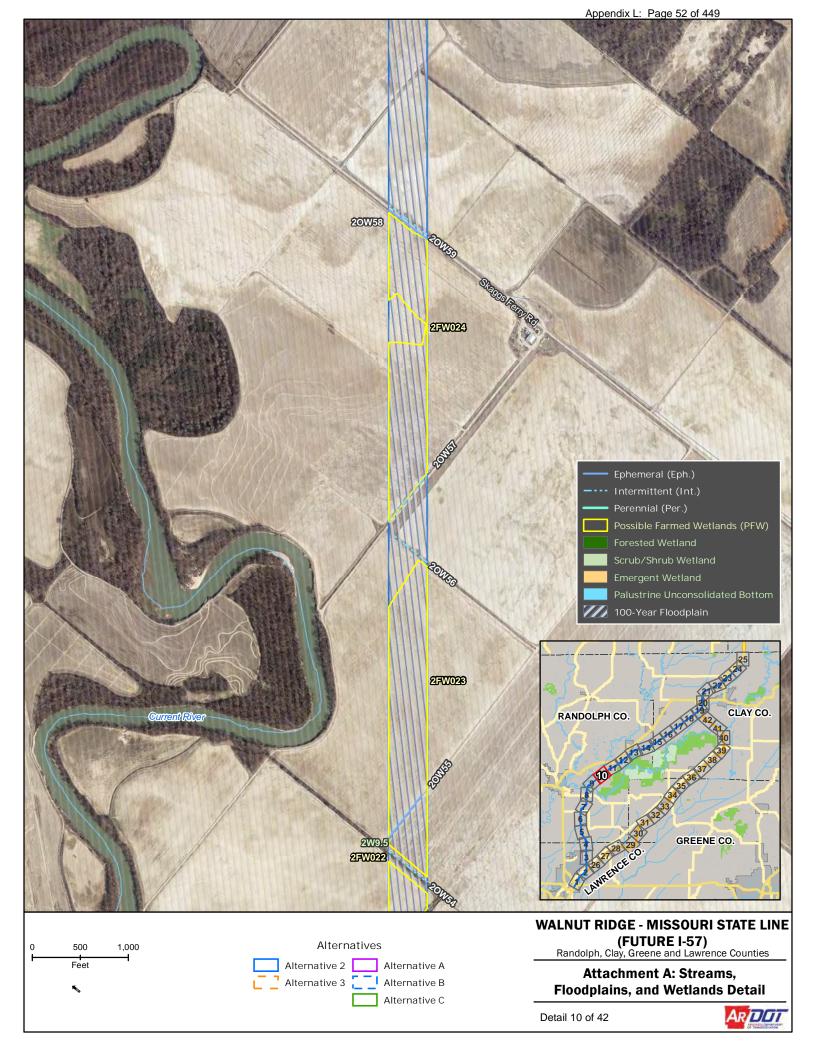


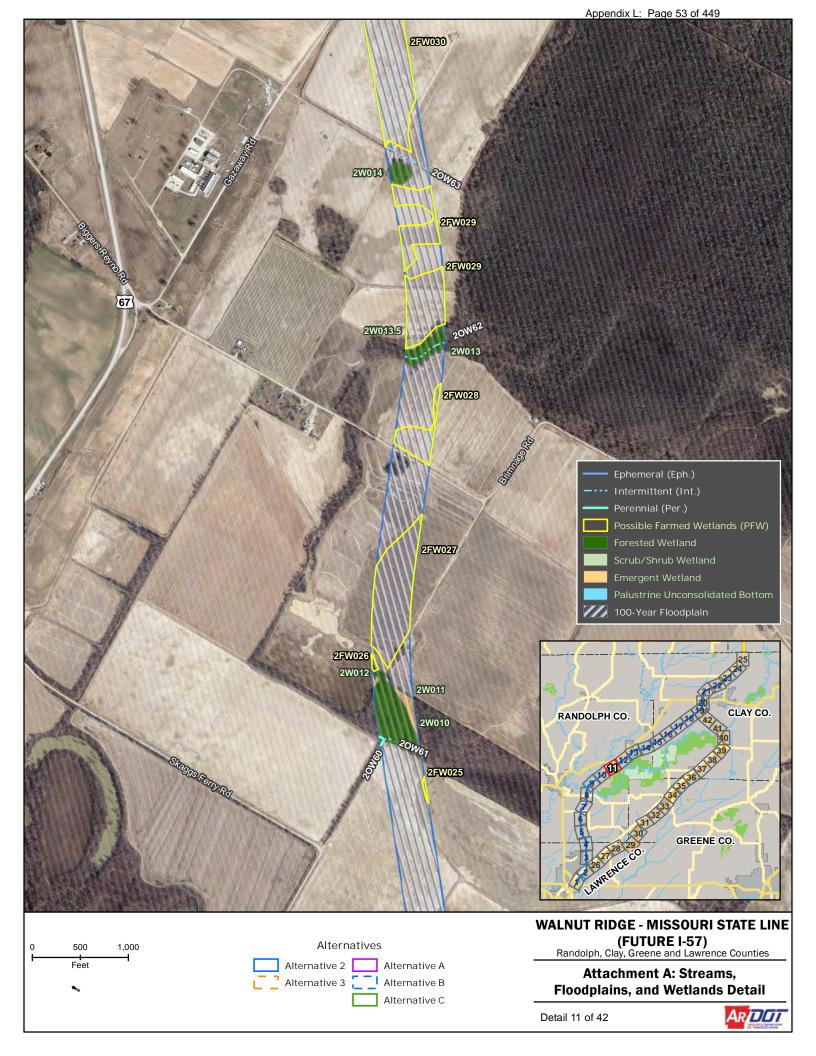


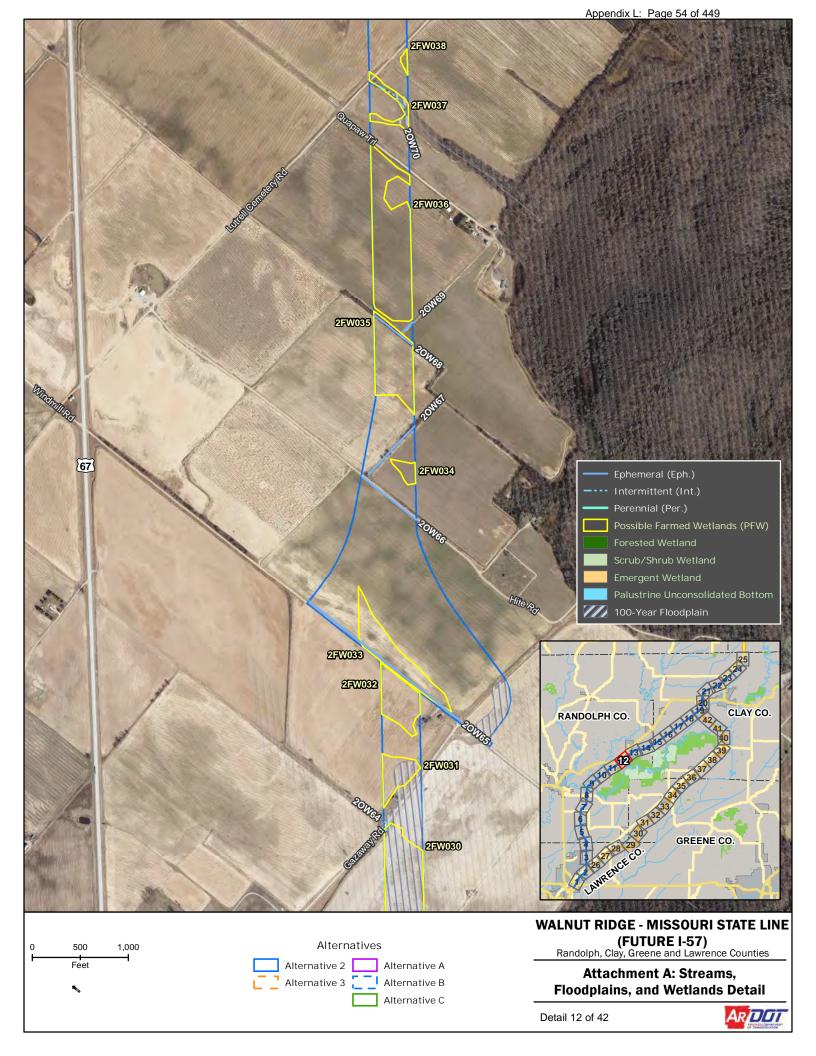


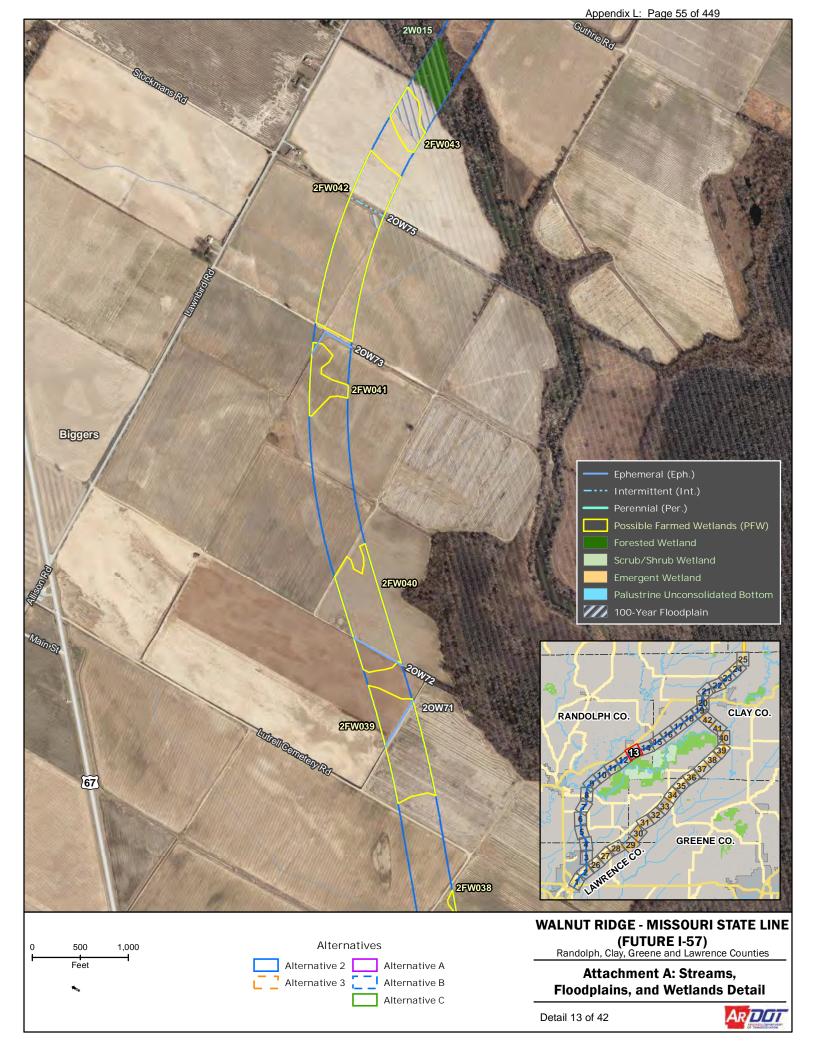


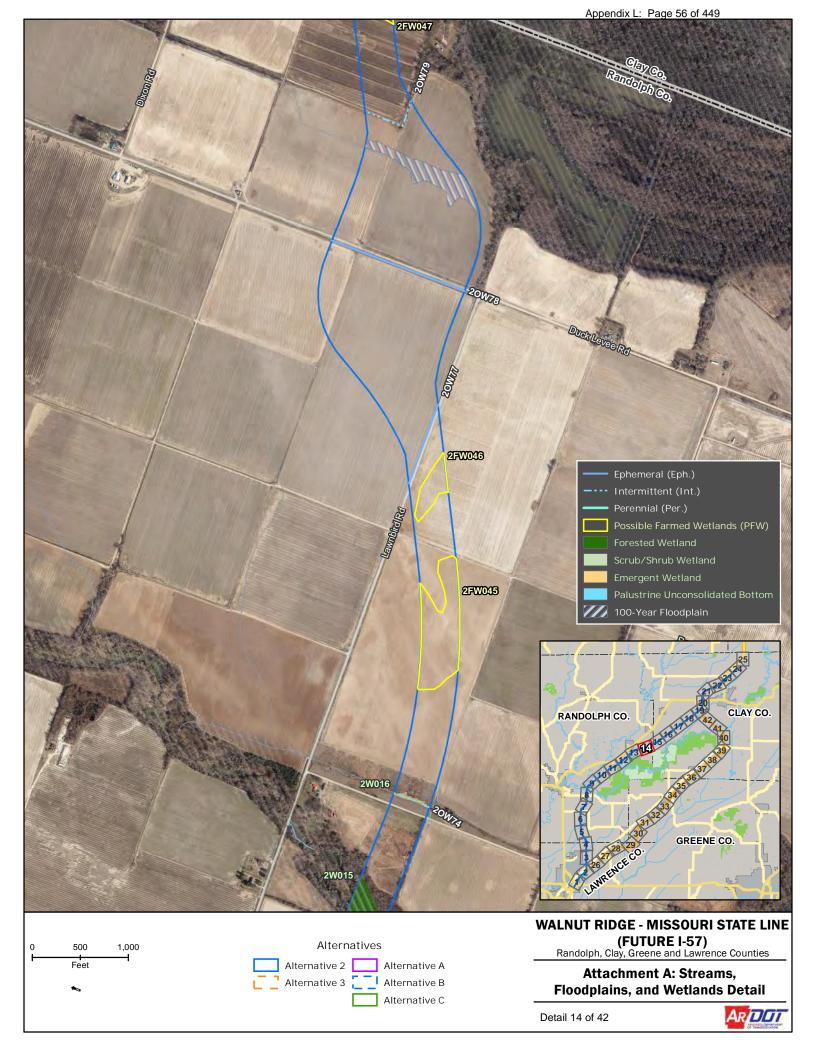


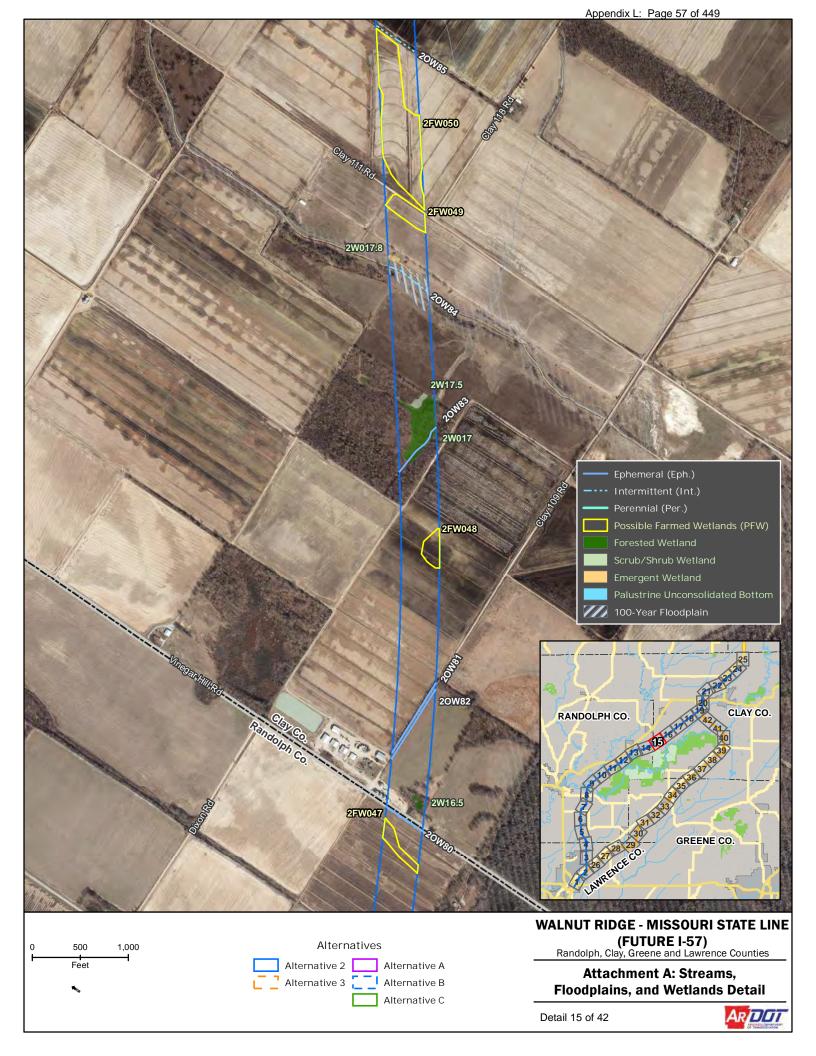


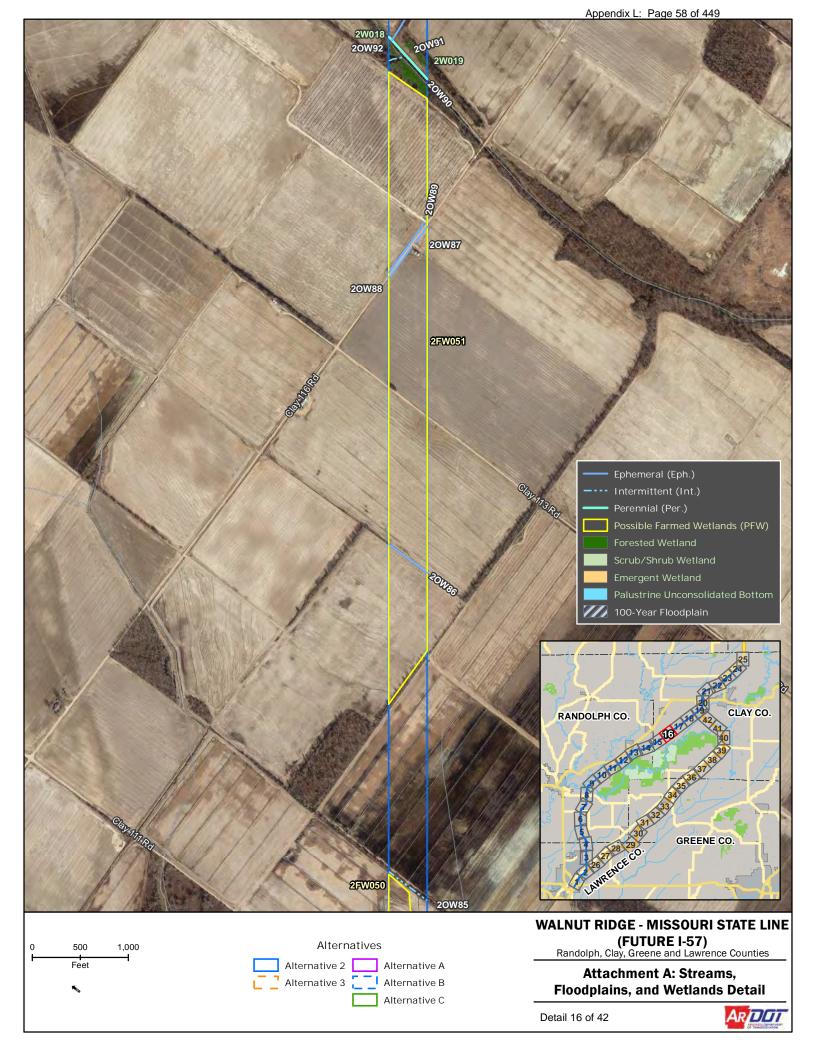


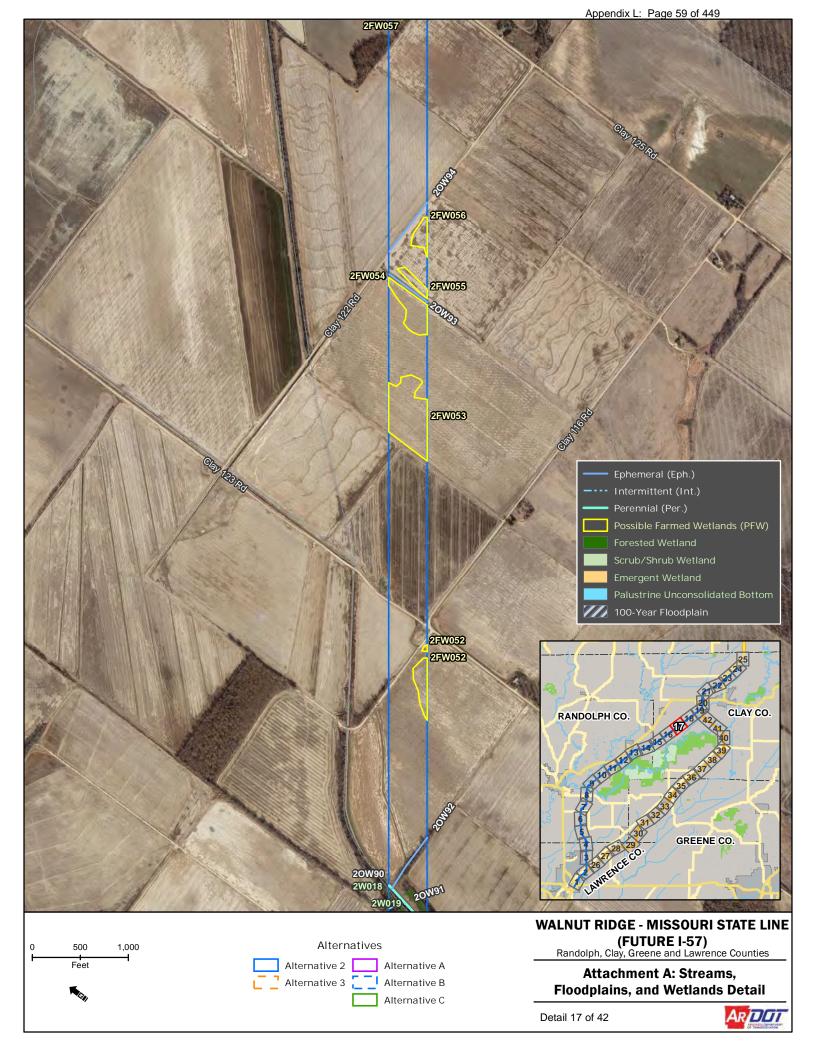


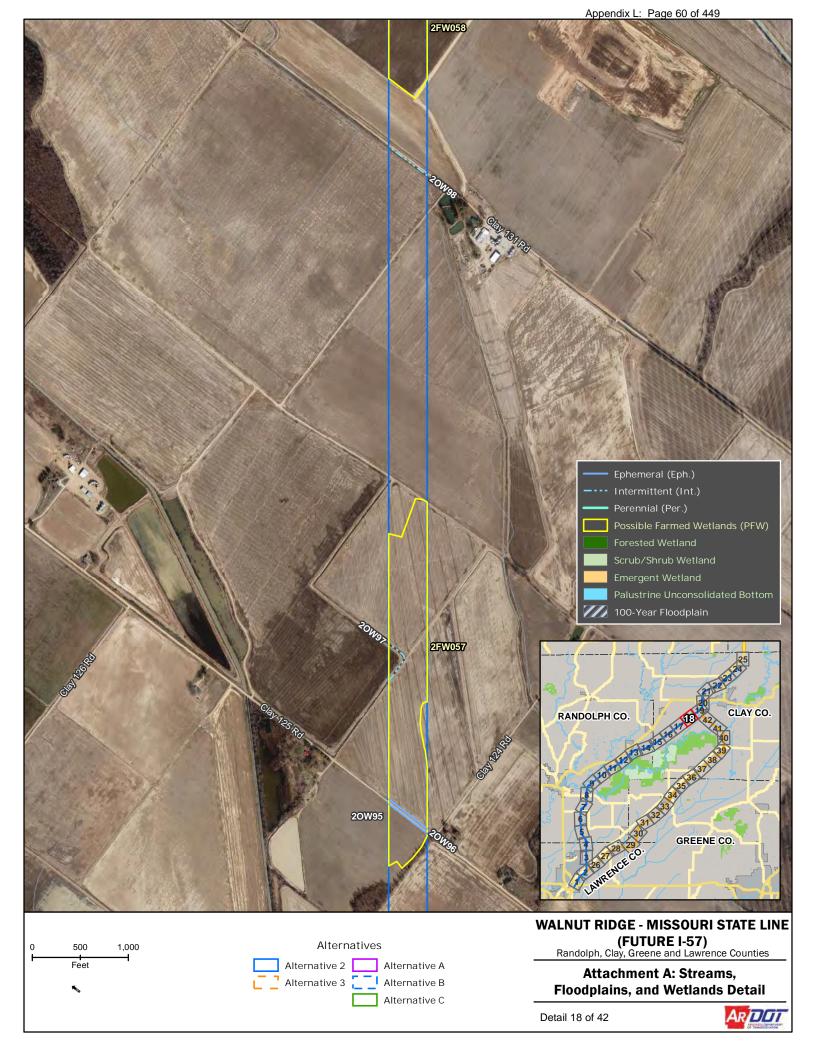


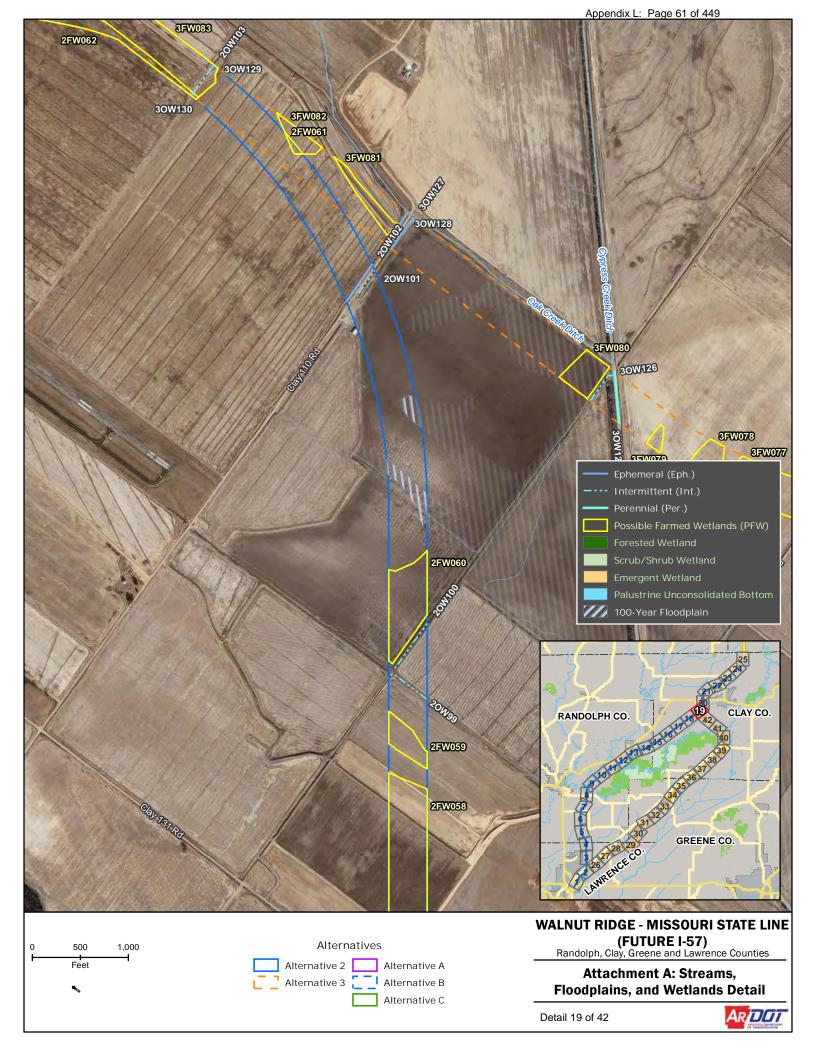


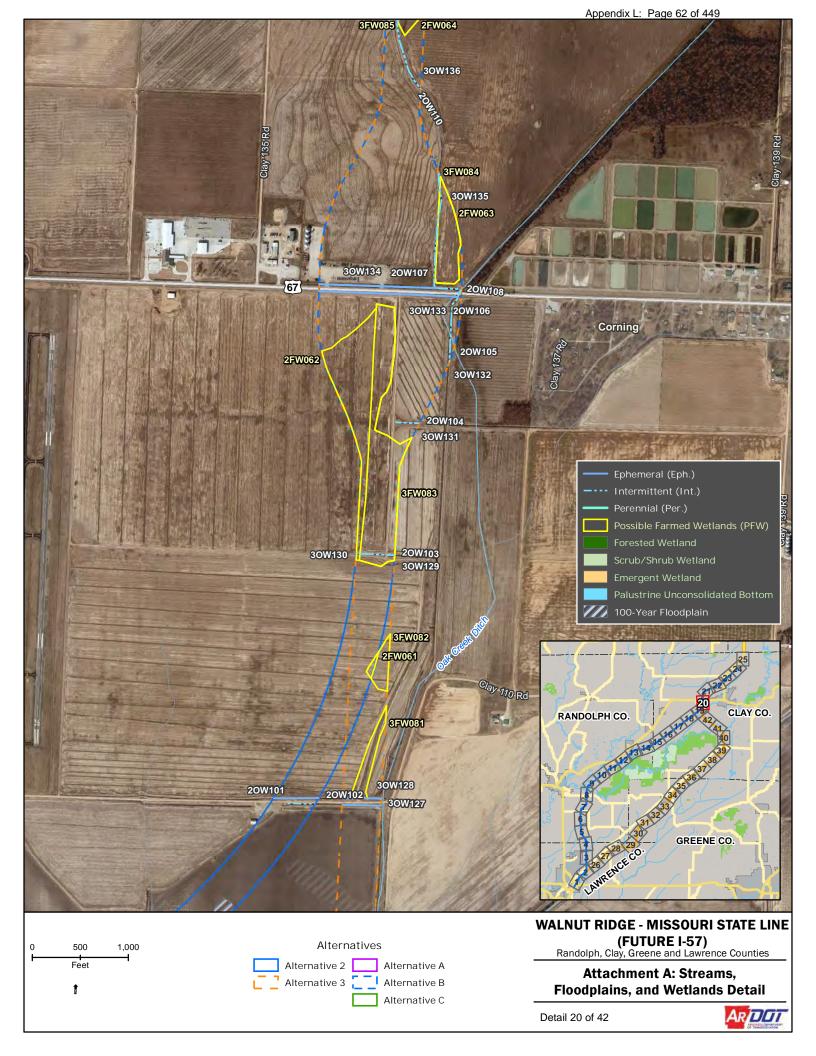


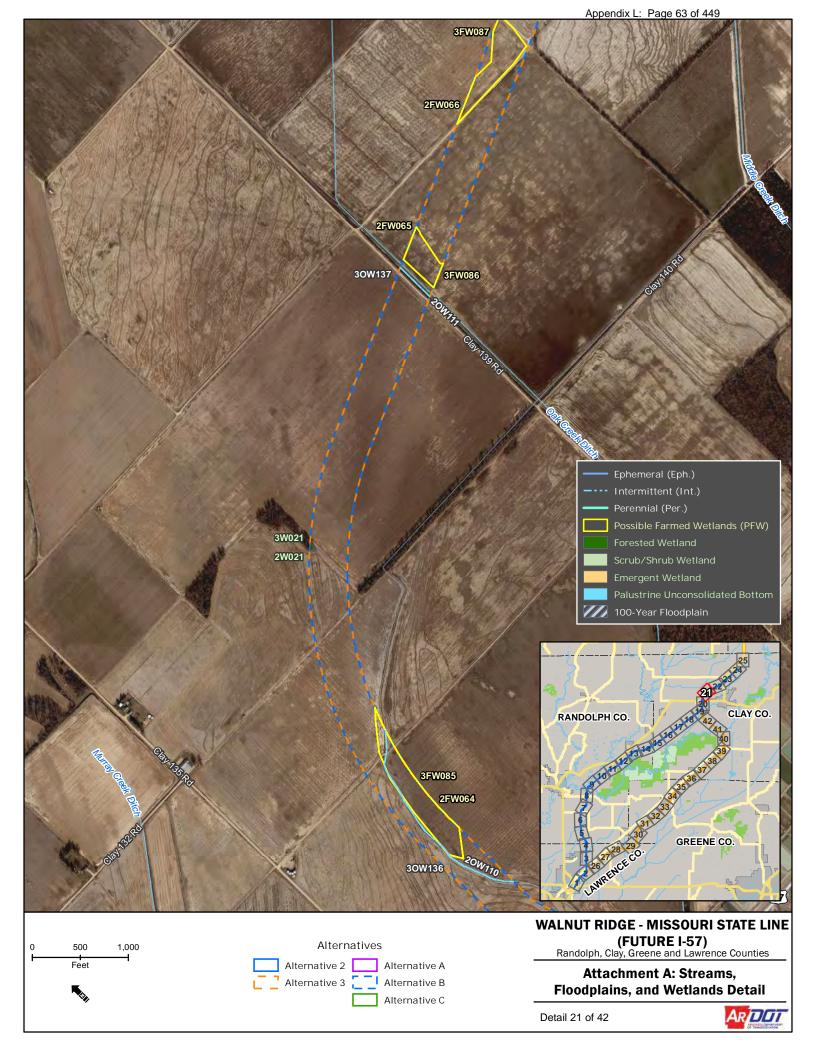


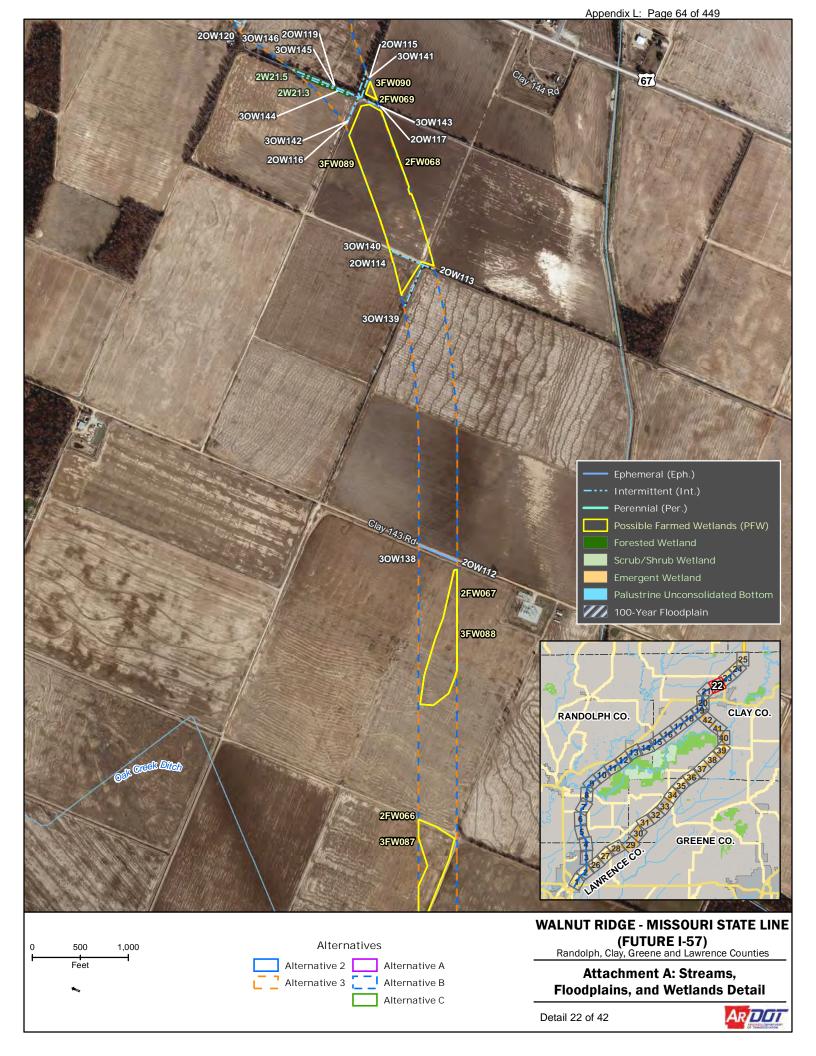


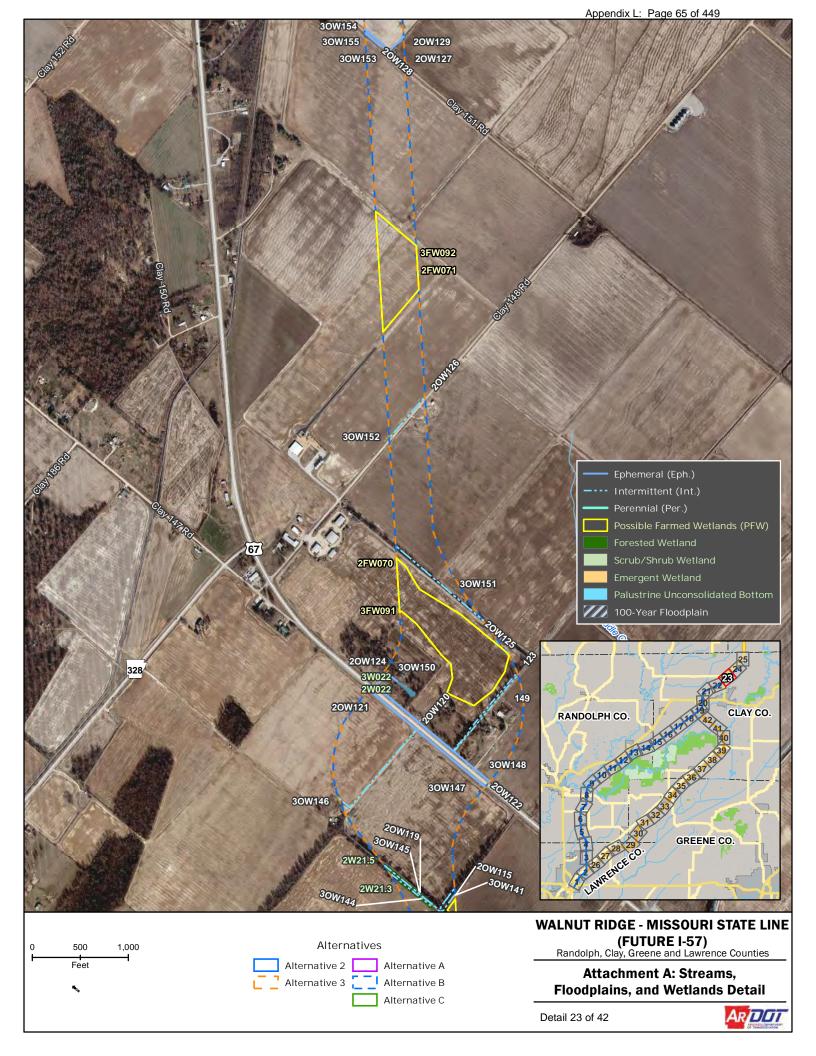


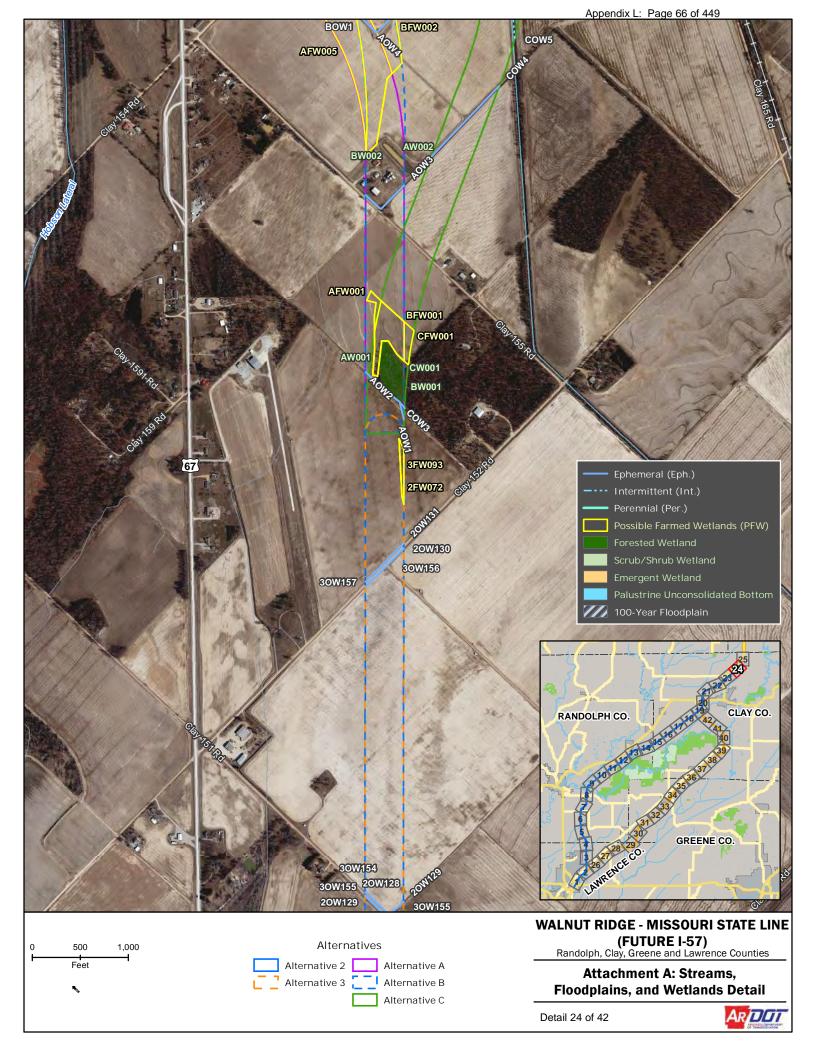


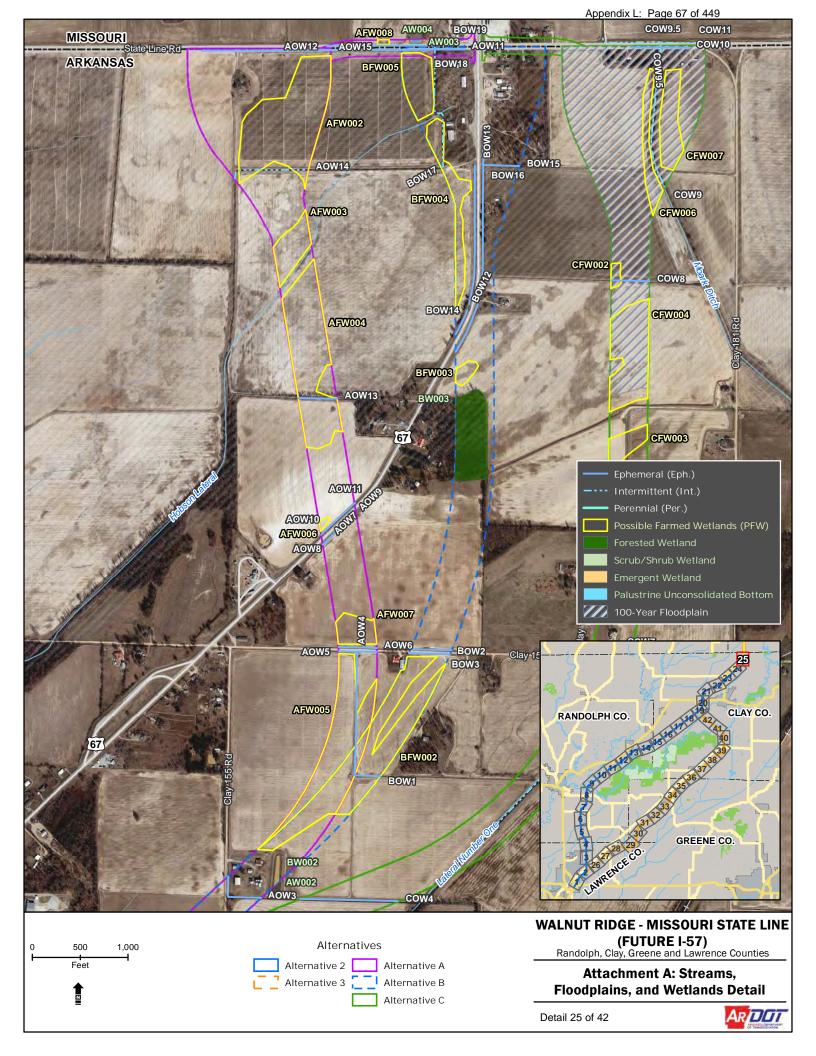


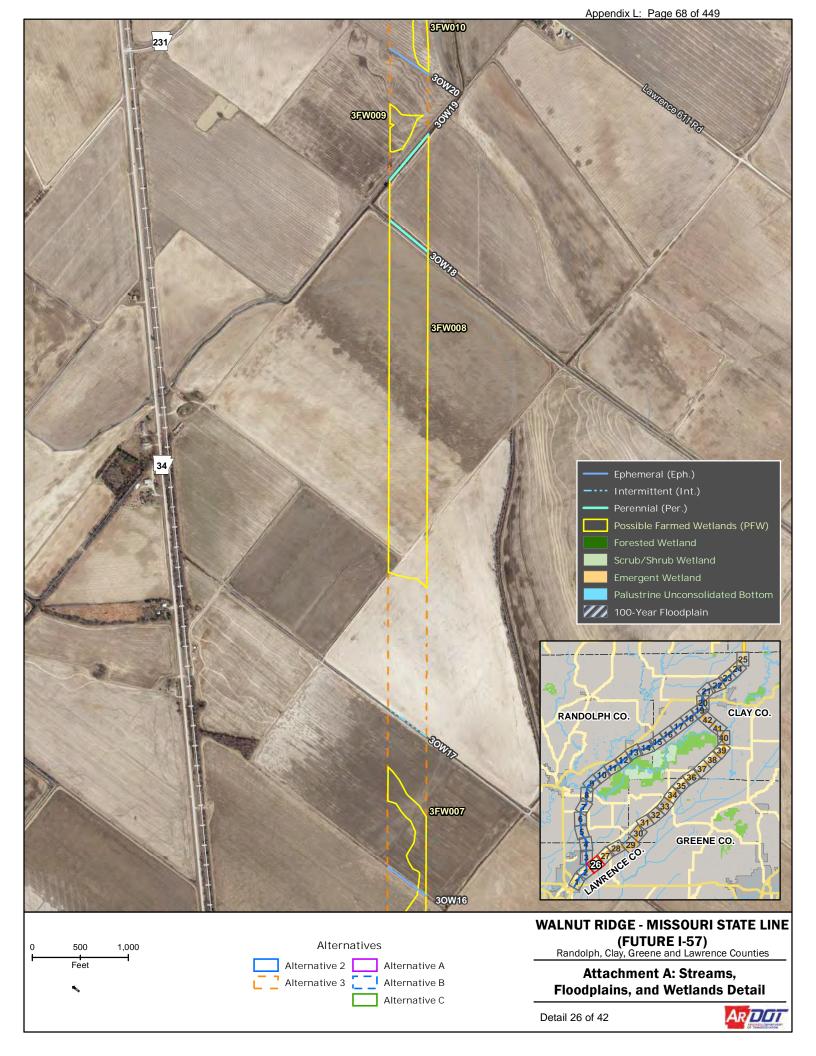


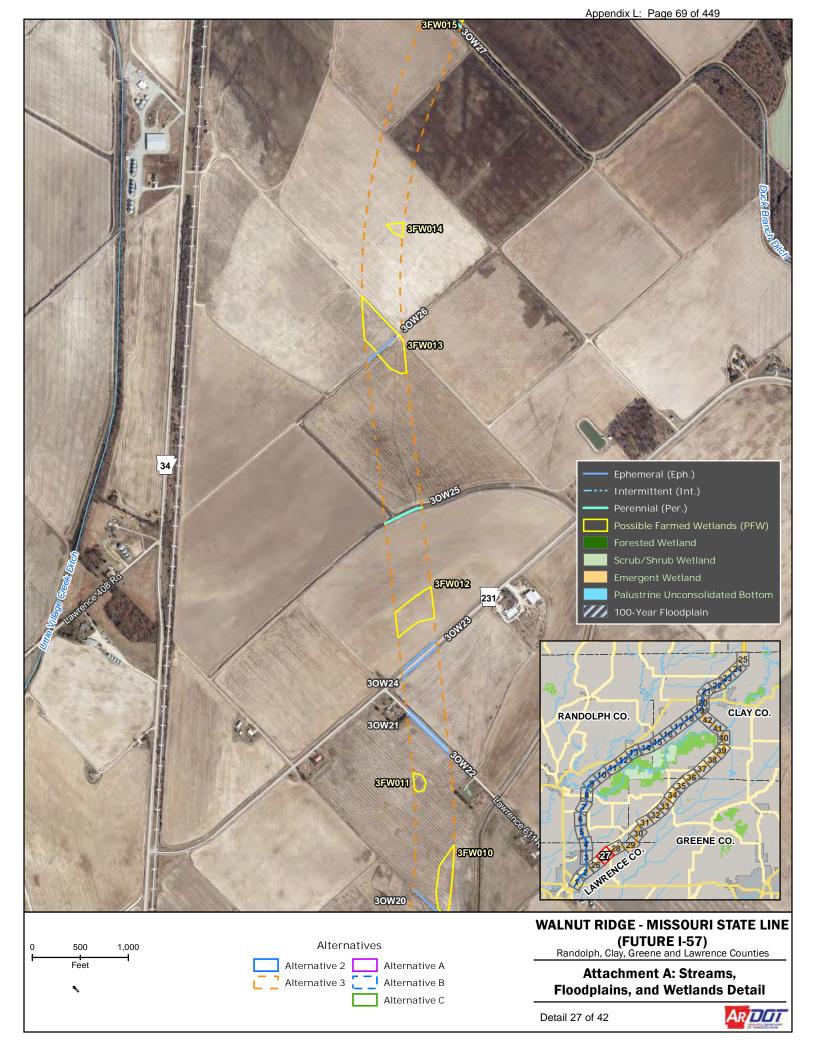


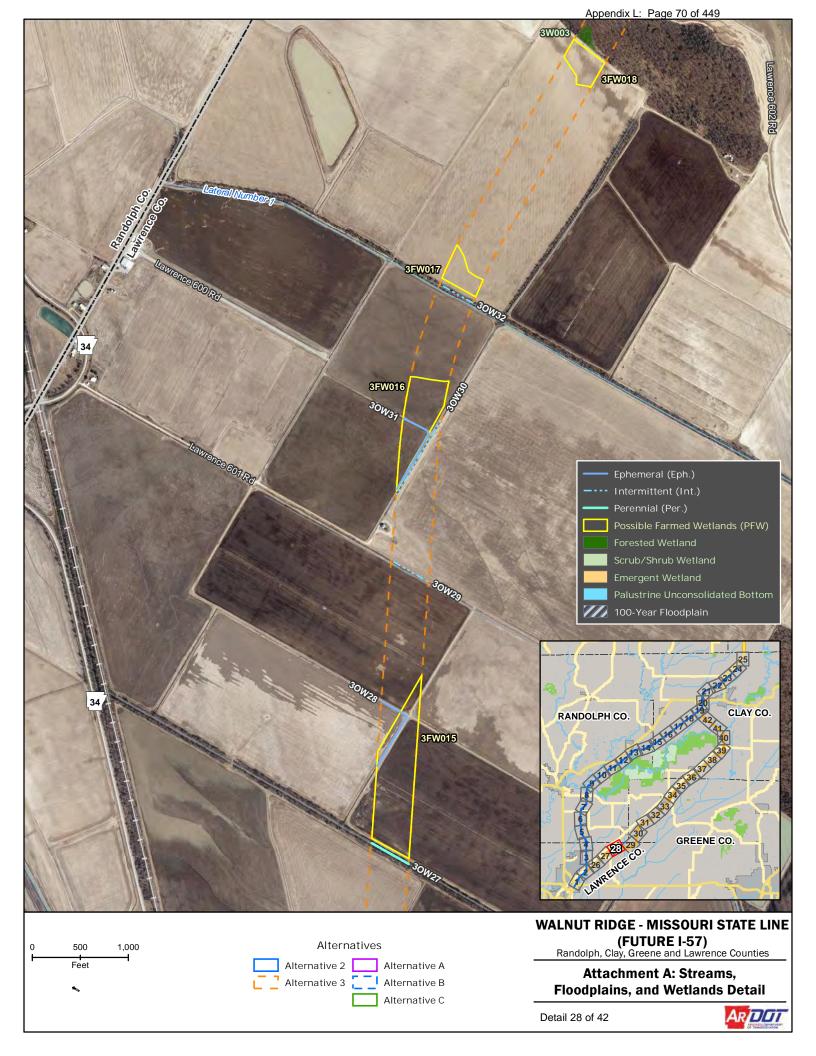


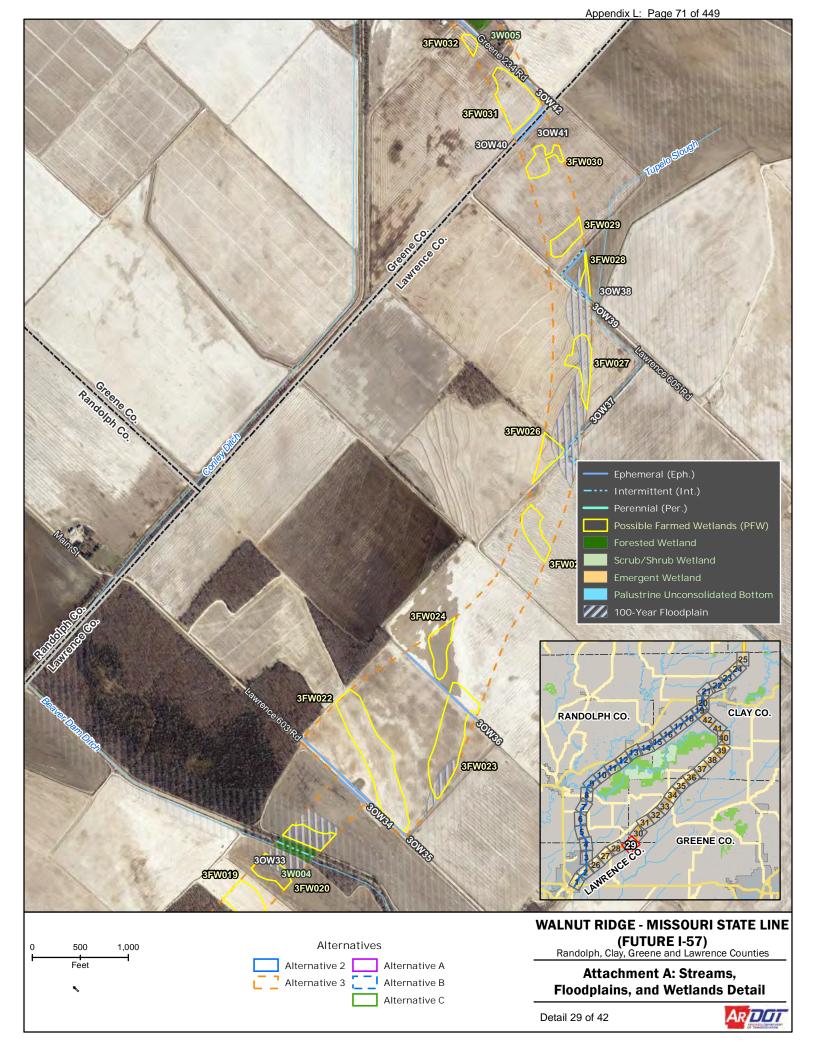


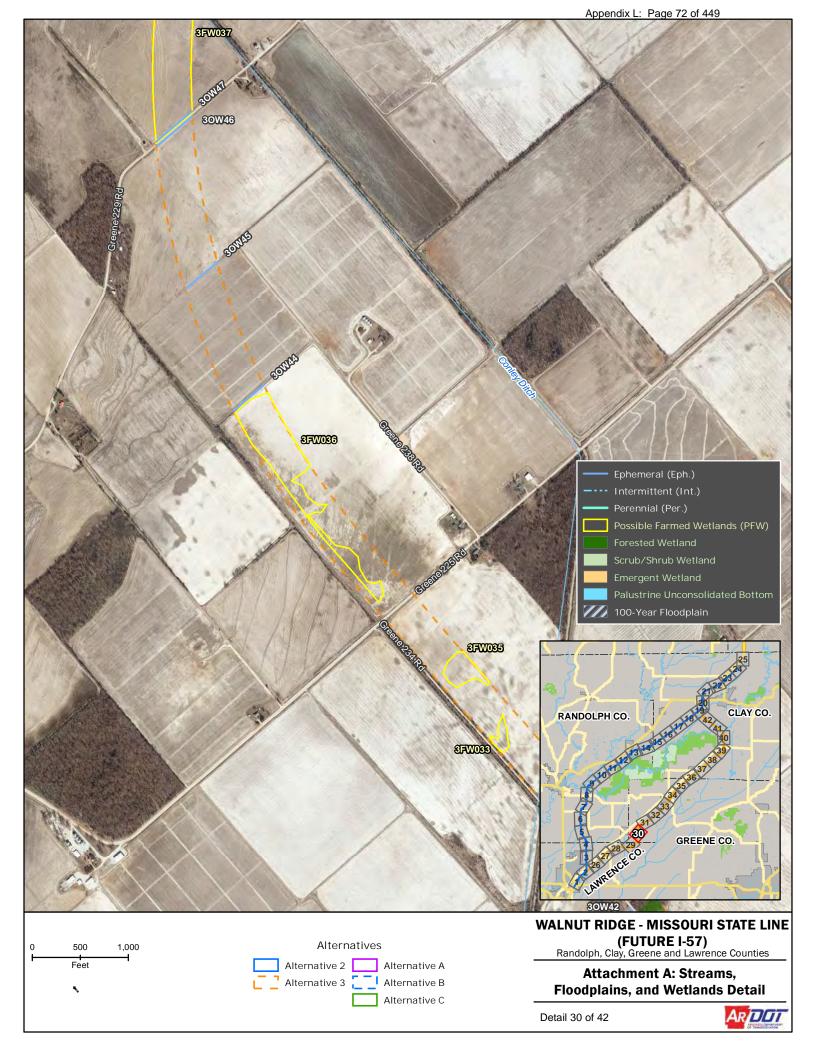


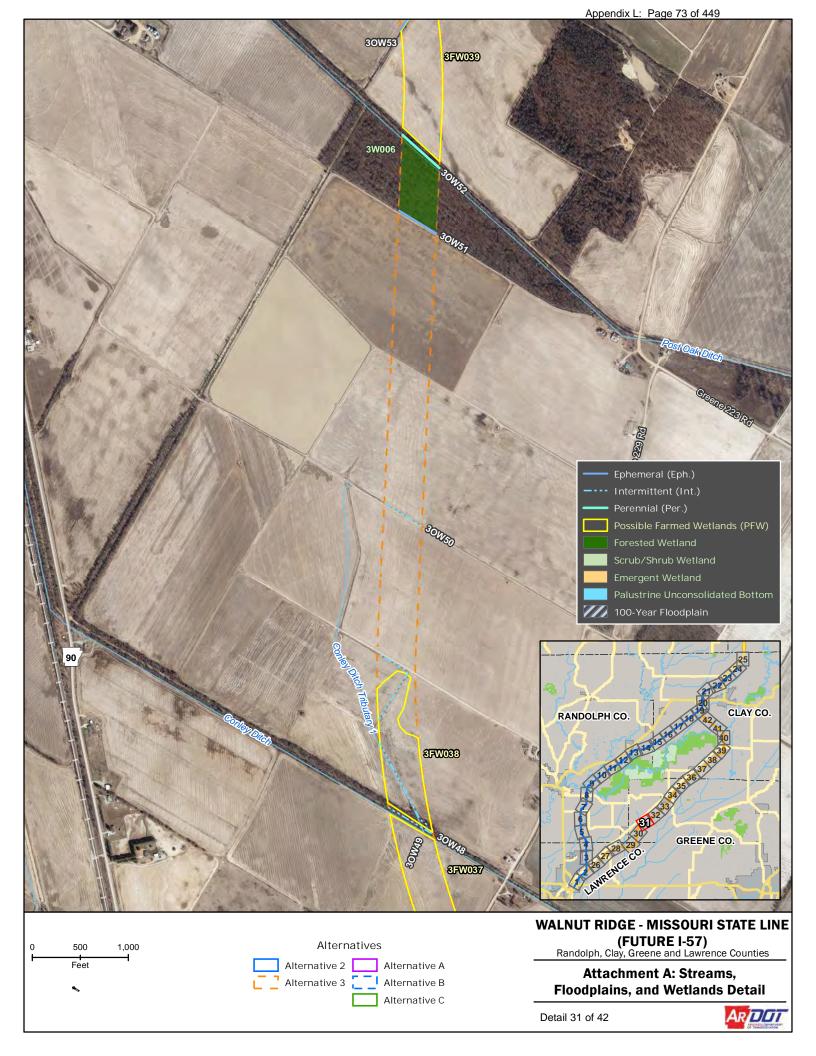


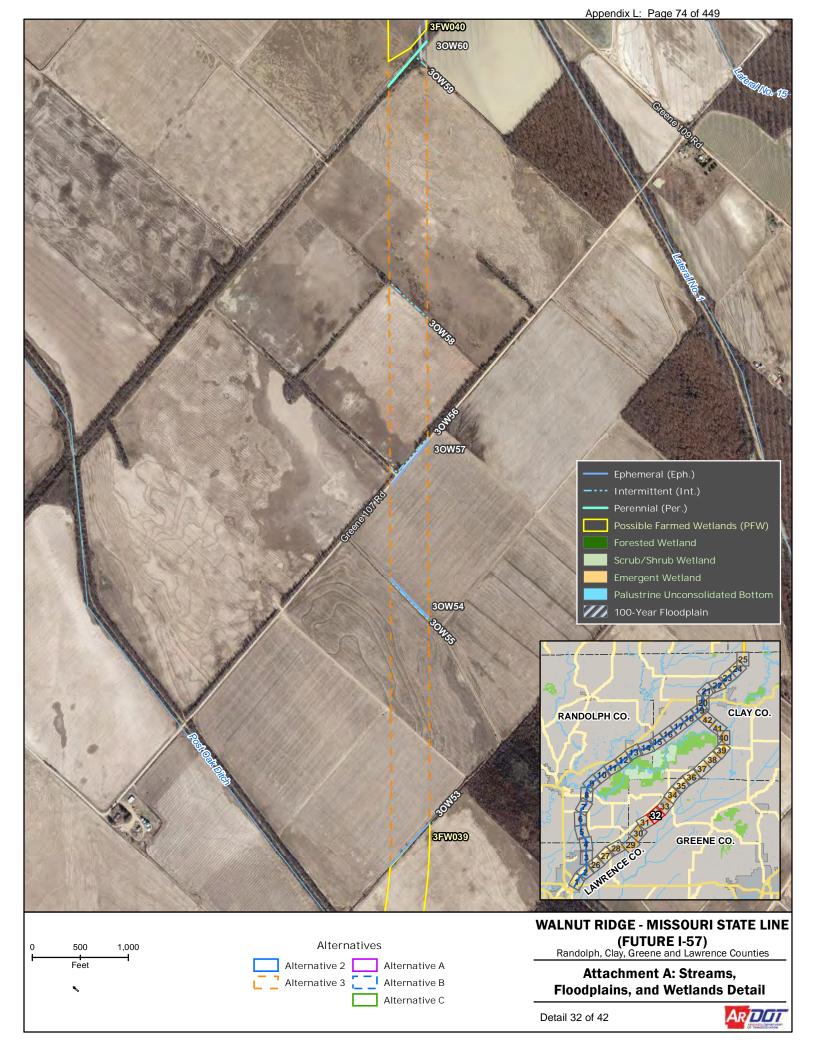


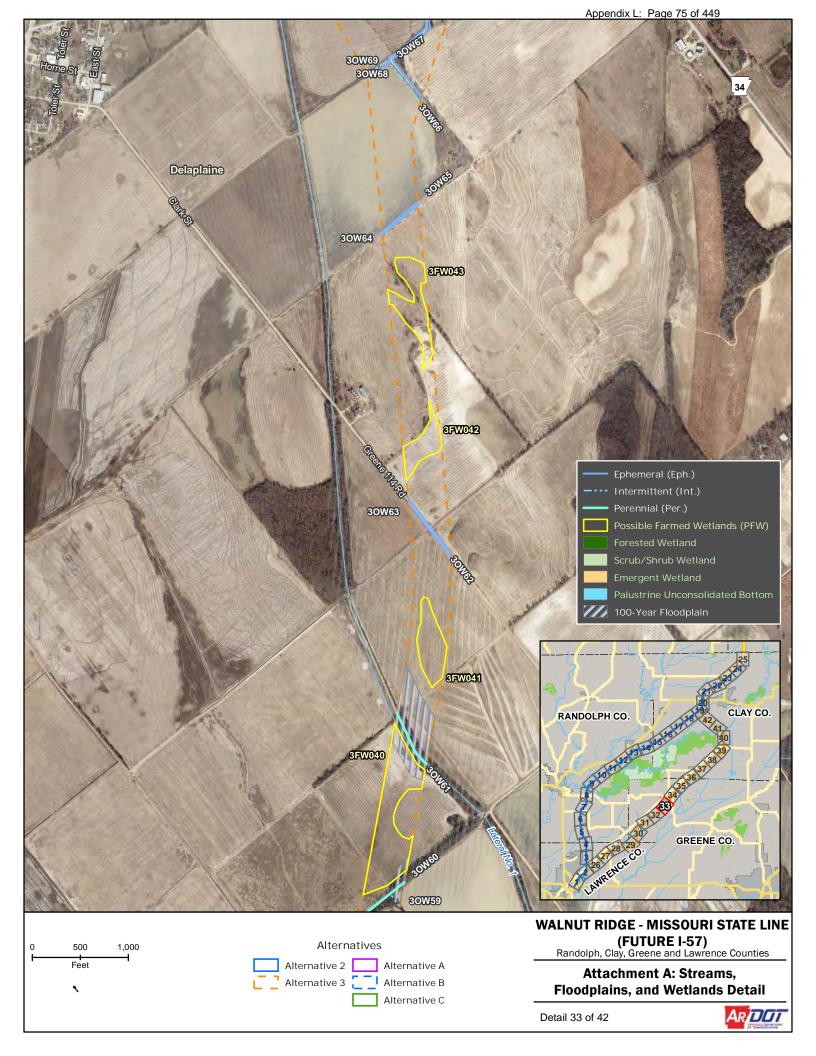


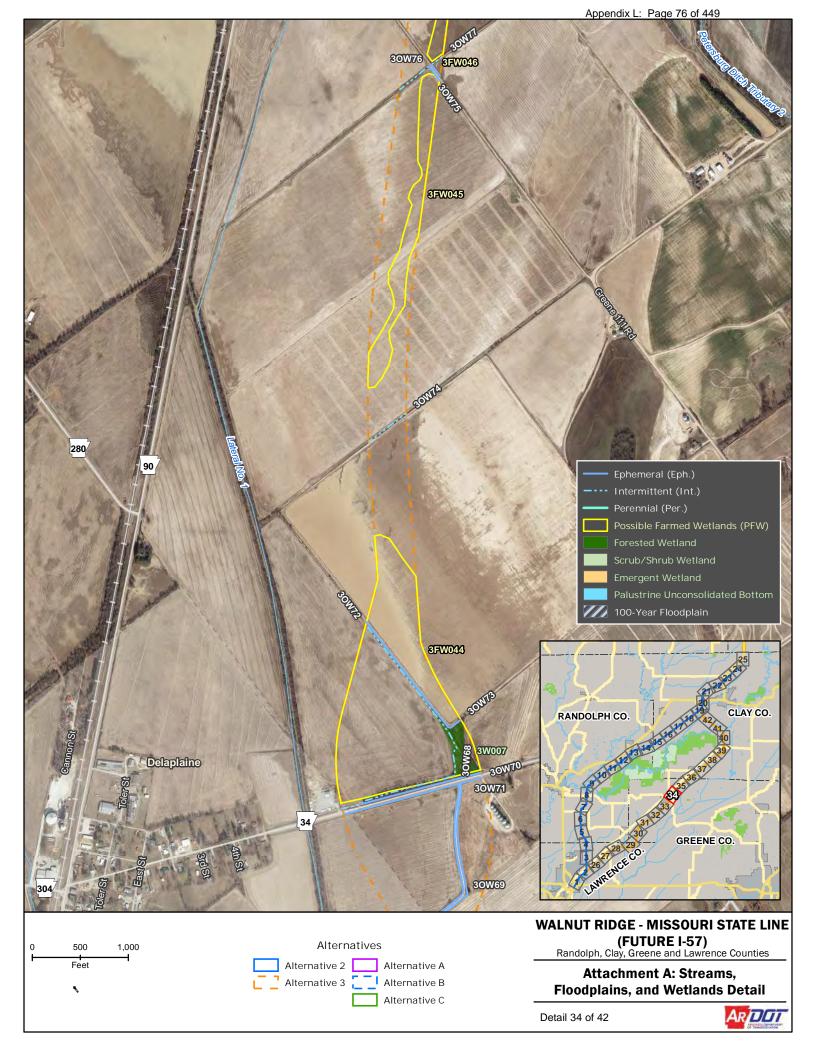


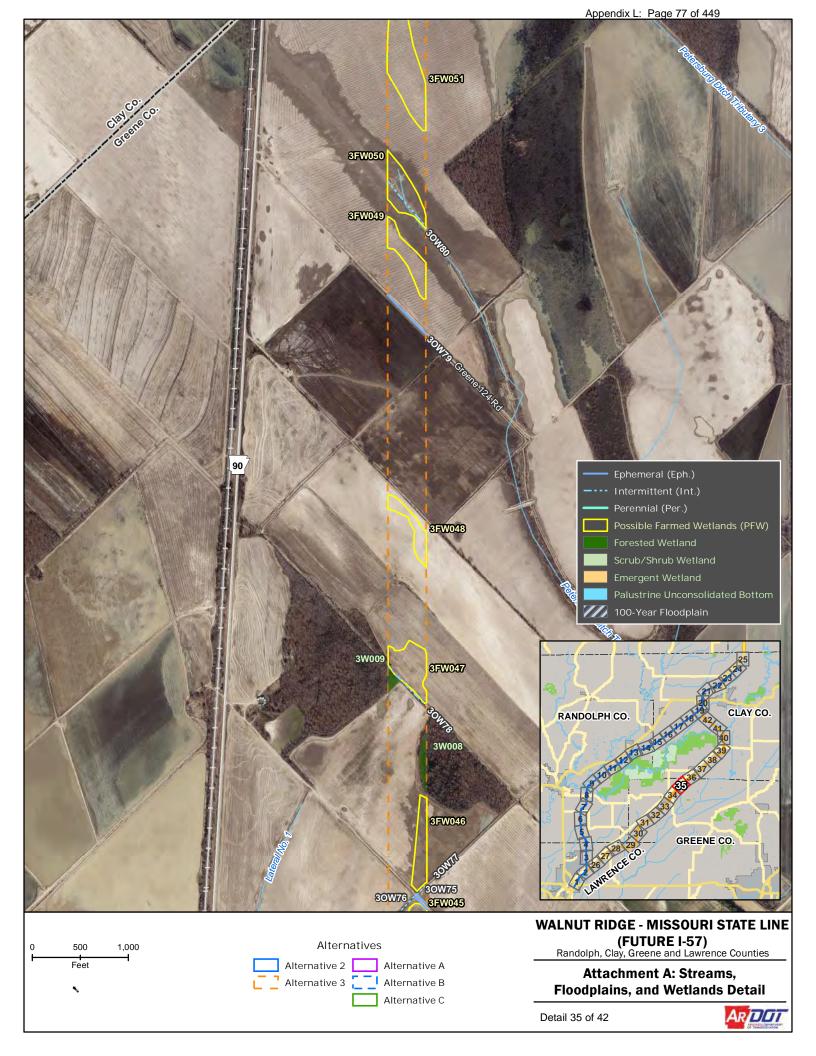

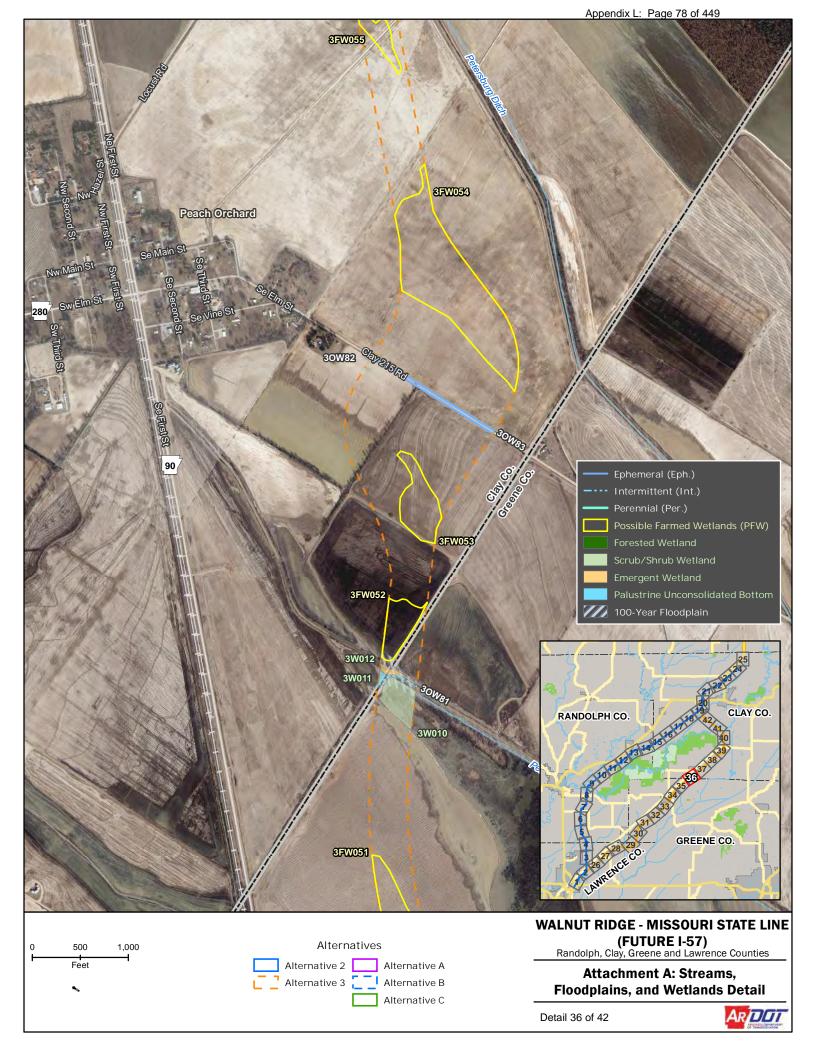


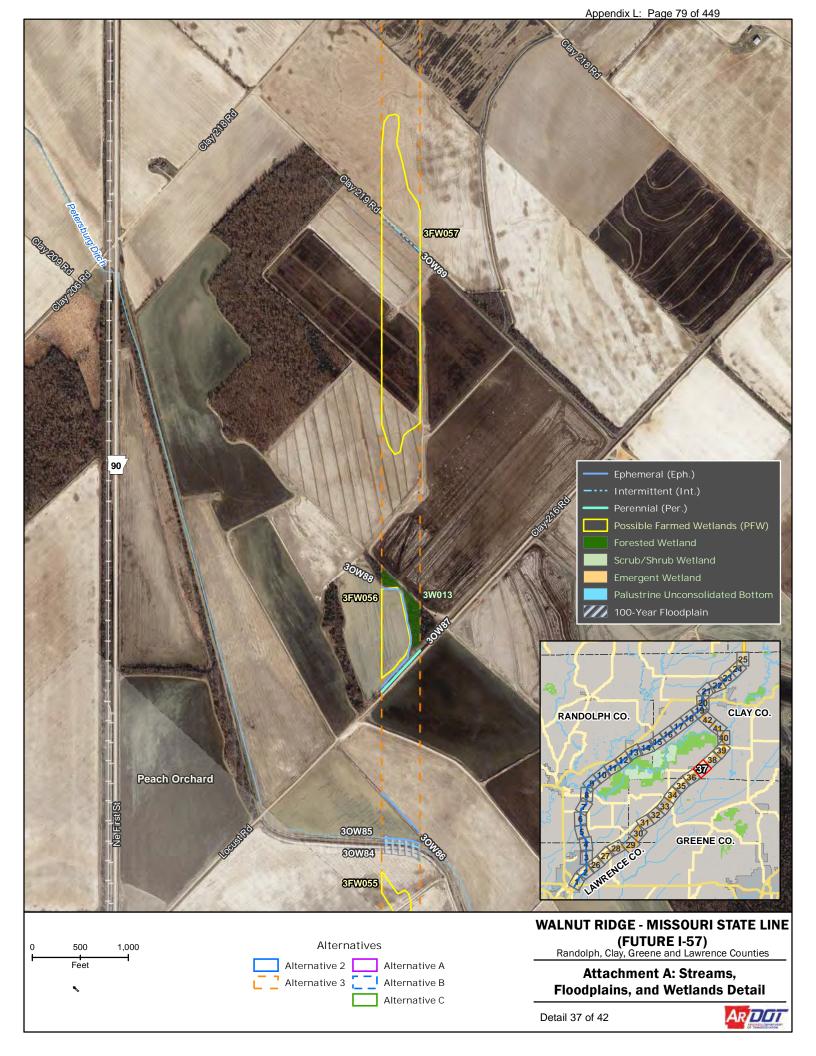


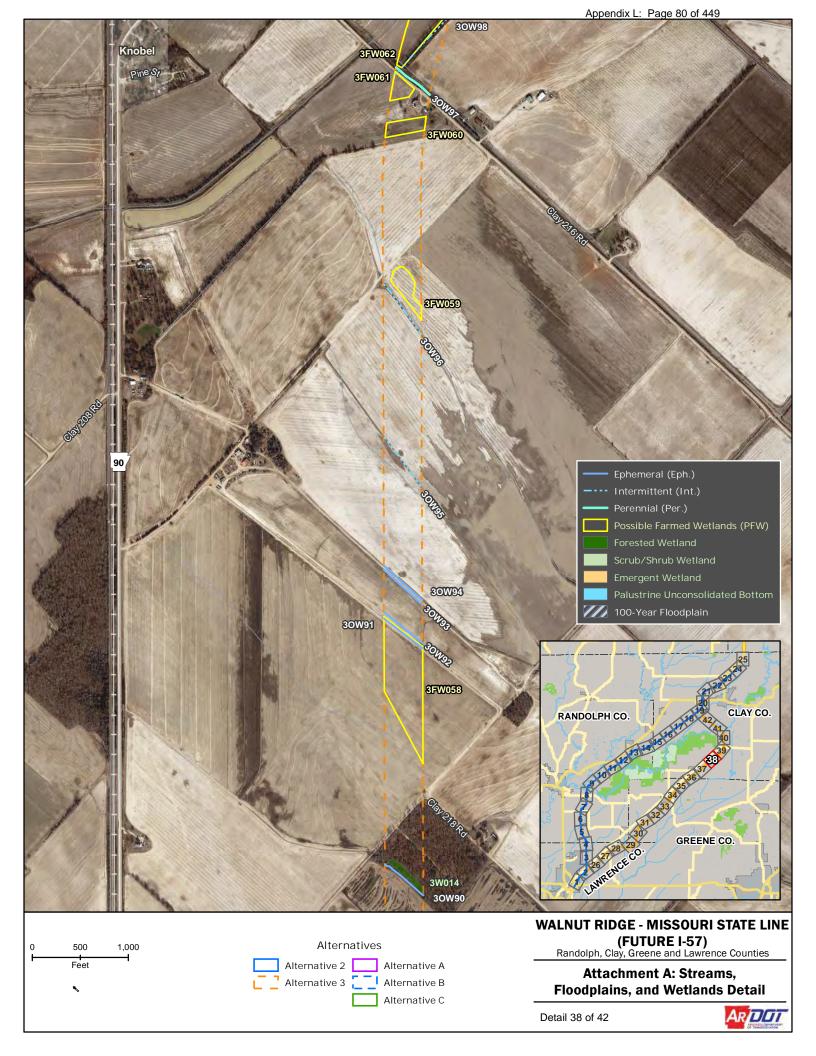

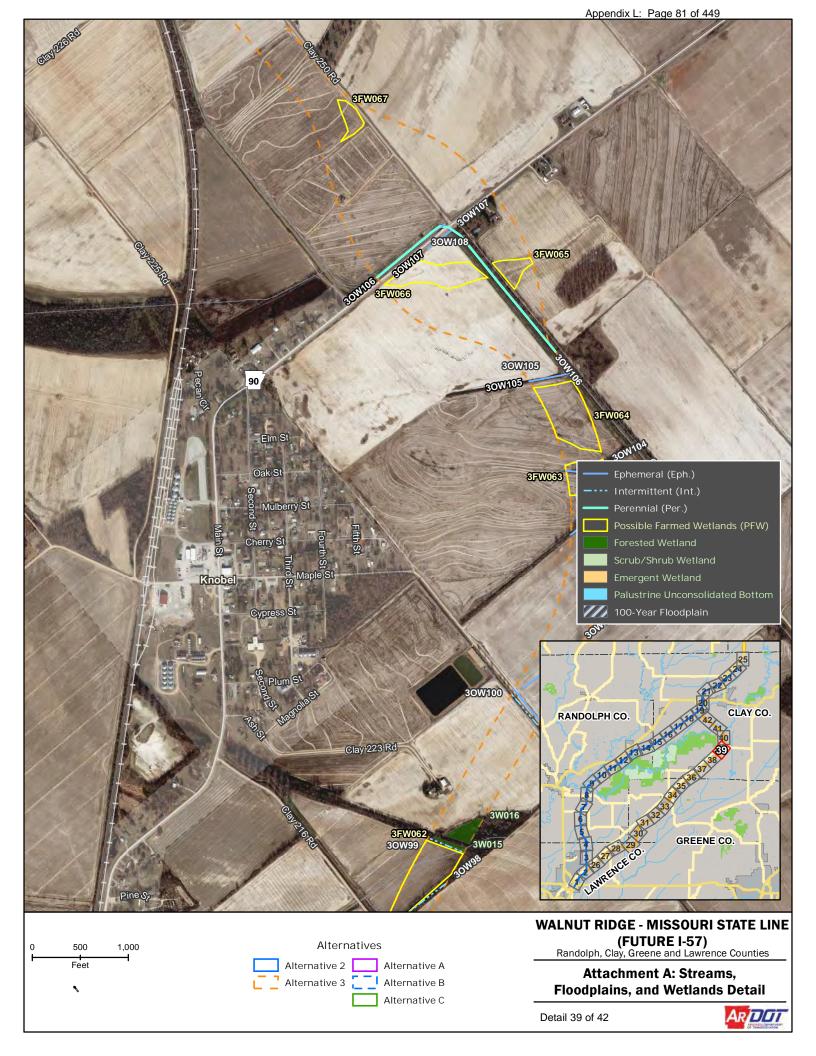



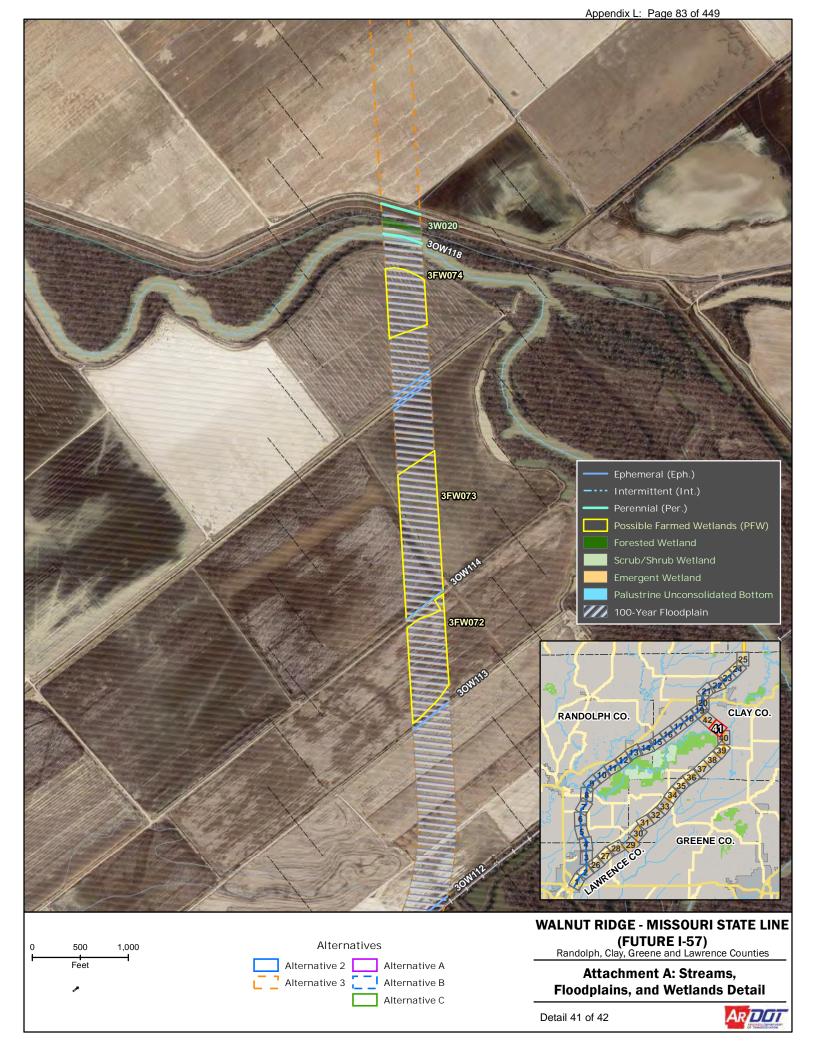

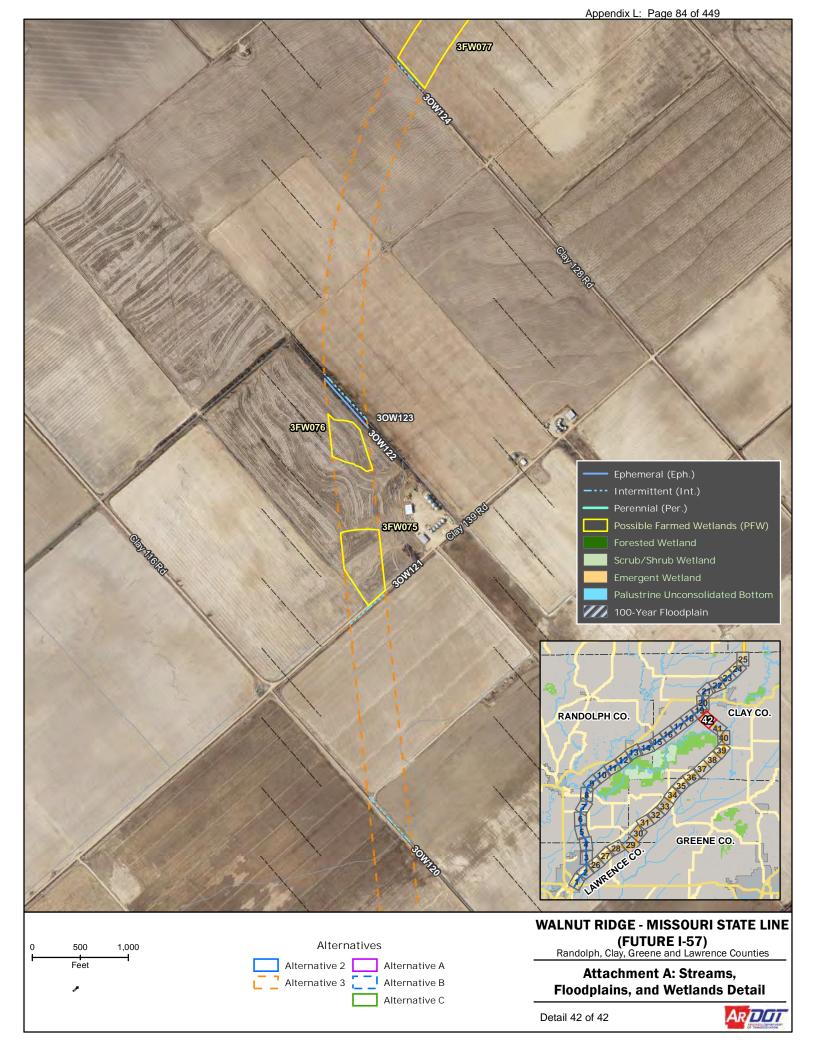


# **Future I-57 FEIS: Waters Technical Report**



# **ATTACHMENT B — SOILS DATA**



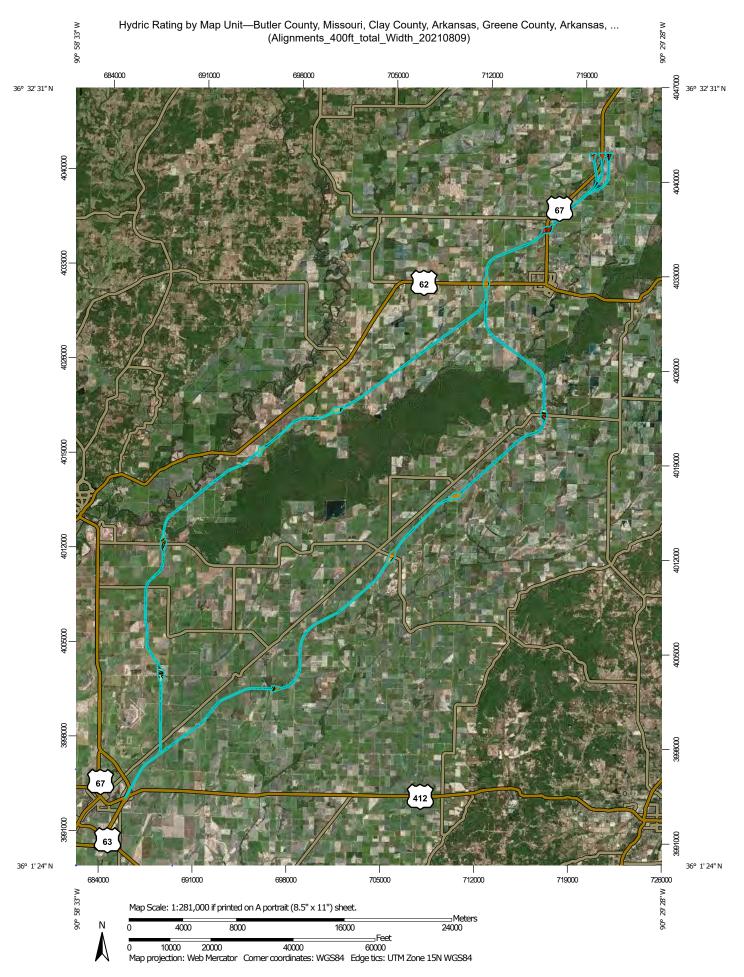

# Hydric Rating by Map Unit—Butler County, Missouri, Clay County, Arkansas, Greene County, Arkansas, Lawrence County, Arkansas, and Randolph County, Arkansas (Alignments\_400ft\_total\_Width\_20210809)

# MAP LEGEND

# Interstate Highways Aerial Photography Major Roads Local Roads US Routes Rails **Transportation** Background ŧ Not rated or not available Area of Interest (AOI) Hydric (33 to 65%) Hydric (66 to 99%) Hydric (1 to 32%) Not Hydric (0%) Hydric (100%) Soil Rating Polygons Area of Interest (AOI)

# MAP INFORMATION

The soil surveys that comprise your AOI were mapped at scales ranging from 1:20,000 to 1:24,000.

Please rely on the bar scale on each map sheet for map

Source of Map: Natural Resources Conservation Service measurements.

Coordinate System: Web Mercator (EPSG:3857) Web Soil Survey URL:

distance and area. A projection that preserves area, such as the Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required. This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Version 24, Aug 27, 2021 Butler County, Missouri Survey Area Data: Soil Survey Area:

Version 20, Sep 13, 2021 Clay County, Arkansas Survey Area Data: Soil Survey Area:

Version 22, Sep 13, 2021 Greene County, Arkansas Survey Area Data: Soil Survey Area:

Lawrence County, Arkansas Version 18, Sep 13, 2021 Survey Area Data: Soil Survey Area:

Not rated or not available

Hydric (66 to 99%) Hydric (33 to 65%)

Hydric (100%)

Soil Rating Points

Hydric (1 to 32%)

Not Hydric (0%)

Hydric (66 to 99%) Hydric (33 to 65%)

Hydric (100%)

Soil Rating Lines

Hydric (1 to 32%)

Not Hydric (0%)

Randolph County, Arkansas Survey Area Data: Version 20, Sep 13, 2021 Soil Survey Area:

different levels of detail. This may result in map unit symbols, soil scales, with a different land use in mind, at different times, or at Your area of interest (AOI) includes more than one soil survey area. These survey areas may have been mapped at different properties, and interpretations that do not completely agree across soil survey area boundaries.

Soil map units are labeled (as space allows) for map scales l:50,000 or larger.

Not rated or not available

Streams and Canals

Water Features

Date(s) aerial images were photographed: Jan 1, 1999—Dec 31

USDA

10/4/2021 Page 3 of 8

Hydric Rating by Map Unit—Butler County, Missouri, Clay County, Arkansas, Greene County, Arkansas, Lawrence County, Arkansas, and Randolph County, Arkansas (Alignments\_400ff\_total\_Width\_20210809)

# **MAP LEGEND**

# MAP INFORMATION

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.



# **Hydric Rating by Map Unit**

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
99037	Urban land-Udorthents complex	0	0.0	0.0%
Subtotals for Soil Survey Area			0.0	0.0%
Totals for Area of Interest			4,368.4	100.0%

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
10	•	100	25.1	0.8%
10	Amagon silt loam, 0 to 1 percent slopes	100	35.1	0.8%
13	Beulah fine sandy loam, 0 to 8 percent slopes	0	18.8	0.4%
14	Bonn-Foley complex	100	197.2	4.5%
15	Bosket fine sandy loam, gently undulating	5	10.9	0.3%
16	Bosket fine sandy loam, undulating	5	2.2	0.1%
19	Calhoun silt loam	100	5.5	0.1%
22	Crowley silt loam	100	387.4	8.9%
23	Dexter silt loam, gently undulating	5	150.1	3.4%
25	Dundee silt loam, 0 to 1 percent slopes	6	46.7	1.1%
27	Foley silt loam, 0 to 1 percent slopes	100	398.2	9.1%
29	Jackport silty clay, 0 to 1 percent slopes	95	486.7	11.1%
30	Kobel silty clay	100	218.8	5.0%
31	Kobel soils, frequently flooded	100	3.3	0.1%
39	Water	0	5.8	0.1%
Subtotals for Soil Survey Area			1,966.7	45.0%
Totals for Area of Interest			4,368.4	100.0%

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
1B	Askew silt loam, 1 to 3 percent slopes	10	10.6	0.2%
11B	Foley silt loam, 1 to 3 percent slopes	90	4.4	0.1%
12A	Foley-Bonn complex, 0 to 1 percent slopes	85	39.3	0.9%

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
16A	Forestdale silty clay loam, 0 to 1 percent slopes, frequently flooded	85	2.3	0.1%
20B	Jackport silty clay loam, 0 to 2 percent slopes	85	521.4	11.9%
23A	Lafe silt loam, 0 to 1 percent slopes	15	18.9	0.4%
28B	Overcup silt loam, 1 to 3 percent slopes	85	0.1	0.0%
34	Water	0	0.0	0.0%
Subtotals for Soil Survey Area			597.0	13.7%
Totals for Area of Interest			4,368.4	100.0%

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
Ao	Amagon silt loam	95	2.1	0.0%
ВоВ	Bosket fine sandy loam, 0 to 3 percent slopes	5	44.9	1.0%
СоА	Crowley silt loam, 0 to 1 percent slopes	95	150.2	3.4%
DeB	Dubbs silt loam, 1 to 3 percent slopes	4	8.2	0.2%
DvA	Dundee silt loam, 0 to 1 percent slopes	6	10.7	0.2%
DvB	Dundee silt loam, gently undulating	15	27.8	0.6%
FcA	Foley-Calhoun complex, 0 to 1 percent slopes	95	80.4	1.8%
Hn	Hillemann silt loam, 0 to 1 percent slopes	12	11.7	0.3%
Ja	Jackport silty clay, 0 to 1 percent slopes	95	411.1	9.4%
Pa	Patterson fine sandy loam, 0 to 1 percent slopes	5	1.6	0.0%
Tu	Tuckerman fine sandy loam	90	0.7	0.0%
Subtotals for Soil Survey Area			749.4	17.2%
Totals for Area of Interest			4,368.4	100.0%

Map uni	t symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
1		Amagon silt loam	90	91.5	2.1%
4		Bosket fine sandy loam, 0 to 3 percent slopes	5	432.0	9.9%

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI	
7	Broseley loamy fine sand, undulating	10	56.7	1.3%	
12	Crowley silt loam	100	18.7	0.4%	
16	Dundee silt loam, 0 to 1 percent slopes	6	154.3	3.5%	
24	Kobel silty clay loam	100	0.1	0.0%	
27	McCrory fine sandy loam, 0 to 1 percent slopes	94	144.4	3.3%	
28	Patterson fine sandy loam, 0 to 1 percent slopes	5	151.7	3.5%	
34	Water	0	1.5	0.0%	
Subtotals for Soil Survey Area			1,051.0	24.1%	
Totals for Area of Interest			4,368.4	100.0%	

# **Description**

This rating indicates the percentage of map units that meets the criteria for hydric soils. Map units are composed of one or more map unit components or soil types, each of which is rated as hydric soil or not hydric. Map units that are made up dominantly of hydric soils may have small areas of minor nonhydric components in the higher positions on the landform, and map units that are made up dominantly of nonhydric soils may have small areas of minor hydric components in the lower positions on the landform. Each map unit is rated based on its respective components and the percentage of each component within the map unit.

The thematic map is color coded based on the composition of hydric components. The five color classes are separated as 100 percent hydric components, 66 to 99 percent hydric components, 33 to 65 percent hydric components, 1 to 32 percent hydric components, and less than one percent hydric components.

In Web Soil Survey, the Summary by Map Unit table that is displayed below the map pane contains a column named 'Rating'. In this column the percentage of each map unit that is classified as hydric is displayed.

Hydric soils are defined by the National Technical Committee for Hydric Soils (NTCHS) as soils that formed under conditions of saturation, flooding, or ponding long enough during the growing season to develop anaerobic conditions in the upper part (Federal Register, 1994). Under natural conditions, these soils are either saturated or inundated long enough during the growing season to support the growth and reproduction of hydrophytic vegetation.


The NTCHS definition identifies general soil properties that are associated with wetness. In order to determine whether a specific soil is a hydric soil or nonhydric soil, however, more specific information, such as information about the depth and duration of the water table, is needed. Thus, criteria that identify those estimated soil properties unique to hydric soils have been established (Federal Register, 2002). These criteria are used to identify map unit components that normally are associated with wetlands. The criteria used are selected estimated soil properties that are described in "Soil Taxonomy" (Soil Survey Staff, 1999) and "Keys to Soil Taxonomy" (Soil Survey Staff, 2006) and in the "Soil Survey Manual" (Soil Survey Division Staff, 1993).

If soils are wet enough for a long enough period of time to be considered hydric, they should exhibit certain properties that can be easily observed in the field. These visible properties are indicators of hydric soils. The indicators used to make onsite determinations of hydric soils are specified in "Field Indicators of Hydric Soils in the United States" (Hurt and Vasilas, 2006).

### References:

Federal Register. July 13, 1994. Changes in hydric soils of the United States.

Federal Register. September 18, 2002. Hydric soils of the United States.



Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.

Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18.

Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service. U.S. Department of Agriculture Handbook 436.

Soil Survey Staff. 2006. Keys to soil taxonomy. 10th edition. U.S. Department of Agriculture, Natural Resources Conservation Service.

# **Rating Options**

Aggregation Method: Percent Present

Component Percent Cutoff: None Specified

Tie-break Rule: Lower

# Future I-57 FEIS: Waters Technical Report




# ATTACHMENT C — REPRESENTATIVE PHOTOGRAPHS OF WETLANDS AND STREAMS



# PHOTO LOG OF Wetland & Stream/Ditch See Sheet 1 of 42 in Attachment C

INSPECTED BY: Anonymous user INSPECTION DATE: 03/02/2021 LOCATION: -90.93118, 36.07446

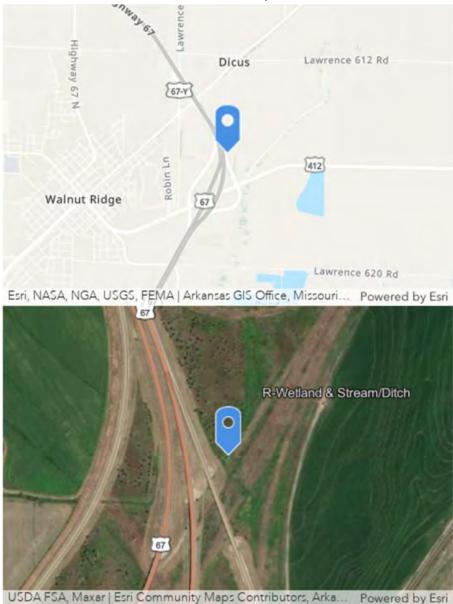

**LOCATION NOTES** 

North side of Hwy 67 on ramp from Hwy 412



# Photo 1 Description: PEM / PFO facing northwest

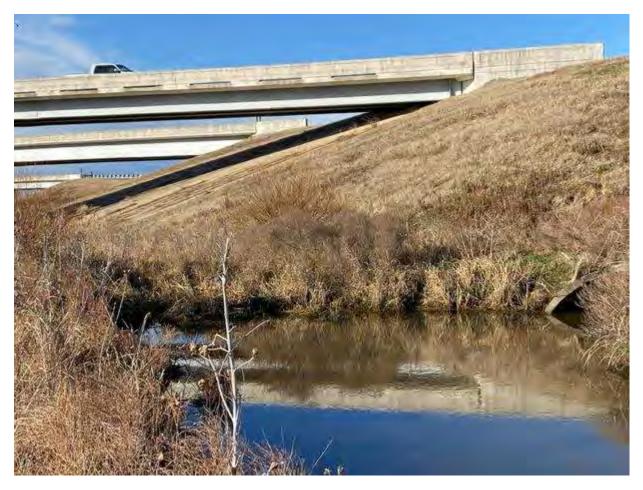


**Photo 2 Description:** Stream or ditch facing northwest






# Photo 3 Description: Facing southwest





# Photo 4 Description: Culvert

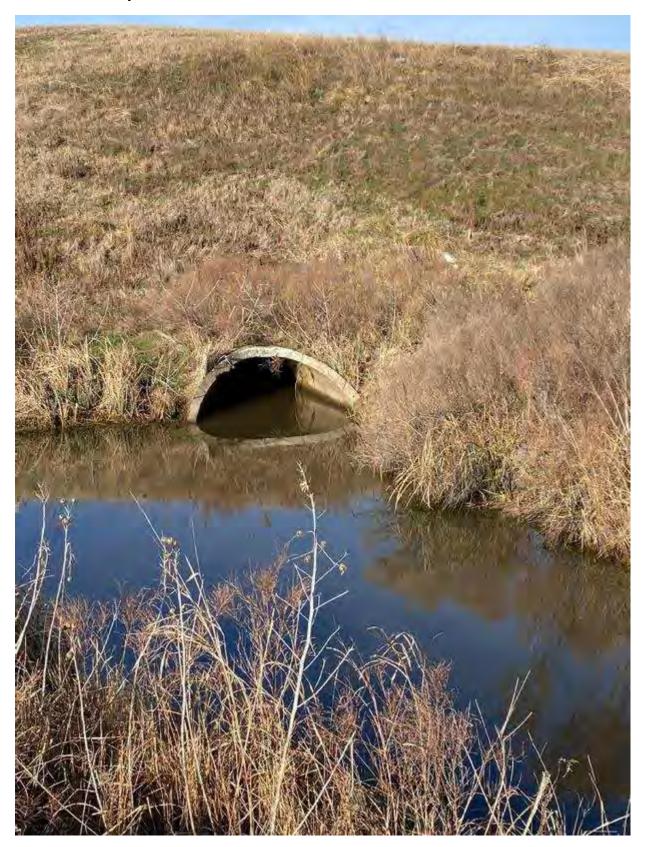

# PHOTO LOG OF Wetland See Sheet 1 of 42 in Attachment C

INSPECTED BY: Anonymous user INSPECTION DATE: 03/02/2021 LOCATION: -90.93144, 36.07268





**LOCATION NOTES** 

PEM within ROW at interchange

Photo 1 Description: PEM-facing east. Hwy 67 on ramp from Hwy 412 in background



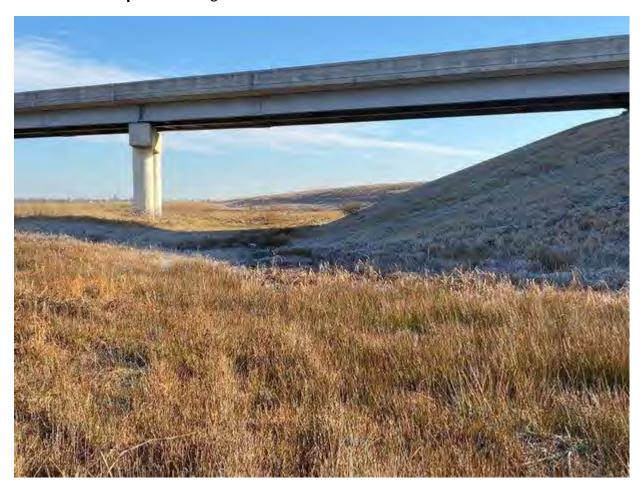


Photo 2 Description: Common plants






# Photo 3 Description: Facing north



### PHOTO LOG OF EXISTING ROW

## See Sheet 1 of 42 in Attachment C

INSPECTED BY: Anonymous user INSPECTION DATE: 03/02/2021 LOCATION: -90.93337, 36.06961

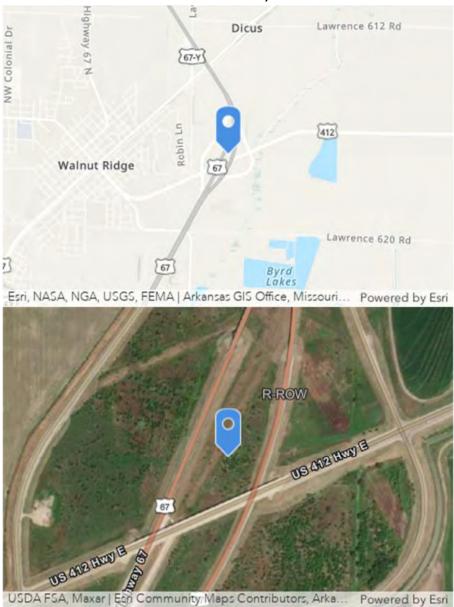

### **LOCATION NOTES**

Sparse wooded ROW. Potential PSS/PEM.



Photo 1 Description: Facing north





Photo 2 Description: Common plants




# Photo 3 Description: Facing south



## Photo 4 Description: Common plants



Photo 6 Description: Tree species bark

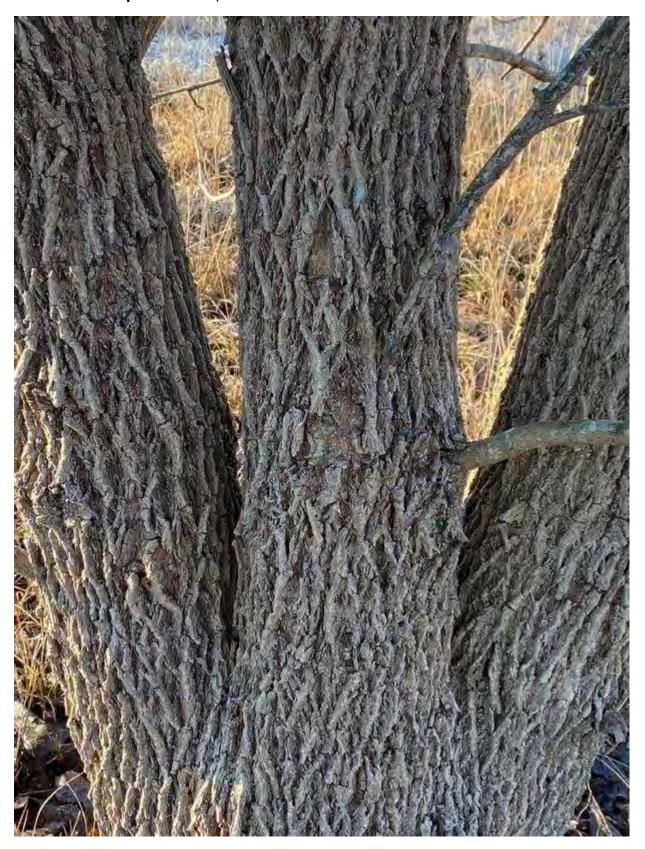




# Photo 7 Description: Facing east






# Photo 8 Description: Facing northeast

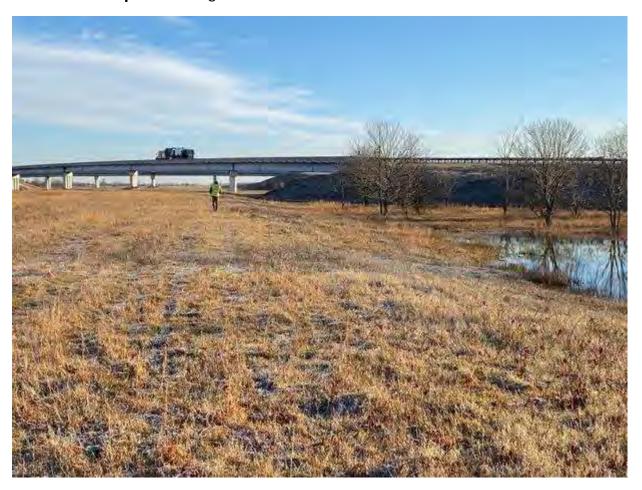

### PHOTO LOG OF STREAM CROSSING (20W012)

See Sheet 3 of 42 in Attachment C

INSPECTED BY: JCMarshall\_Garver INSPECTION DATE: 03/02/2021 LOCATION: -90.90573, 36.13156

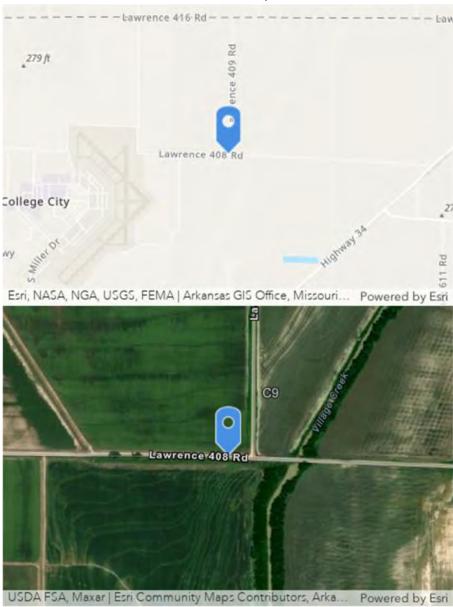

### **LOCATION NOTES**

Farm fields and drainage ditch



# Photo 1 Description: Facing North



Photo 2 Description: Facing South



# Photo 3 Description: Drainage ditch 10x2'





# Photo 4 Description: Ditch to the east



# Photo 5 Description: Vegetation



# Photo 6 Description: Vegetation




### **PHOTO LOG OF: Culvert**

### See Sheet 19 of 42 in Attachment A

INSPECTED BY: Anonymous user INSPECTION DATE: 03/02/2021 LOCATION: -90.63558, 36.39695



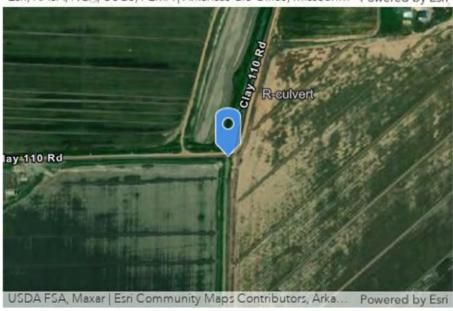

**LOCATION NOTES** 

CR 110

Photo Log of: Canal in Alts 2 and 3

Photo 1 Description: Facing south - downstream

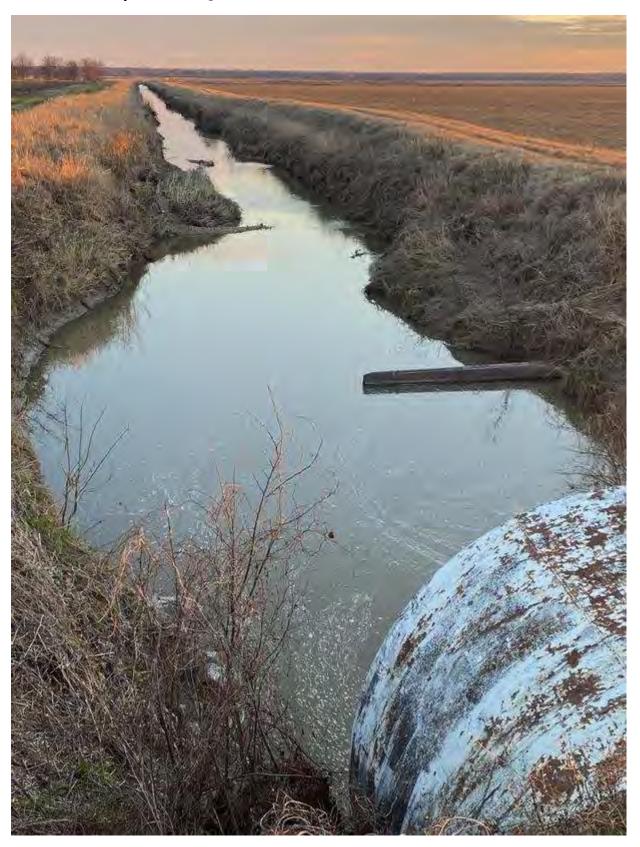




Photo Log of: Canal in Alts 2 and 3

Photo 2 Description: Facing west


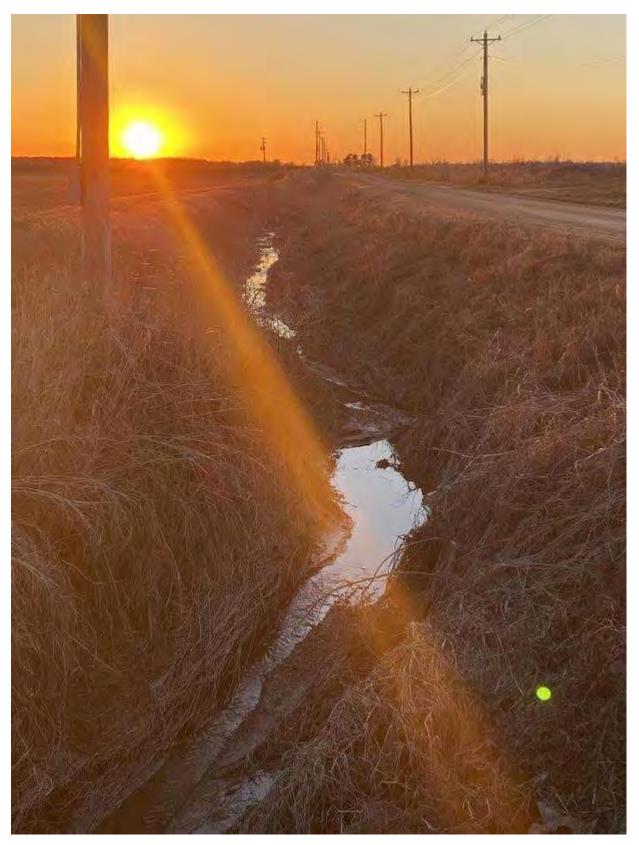




Photo Log of: Canal in Alts 2 and 3


Photo 3 Description: Inside large 72" metal pipe

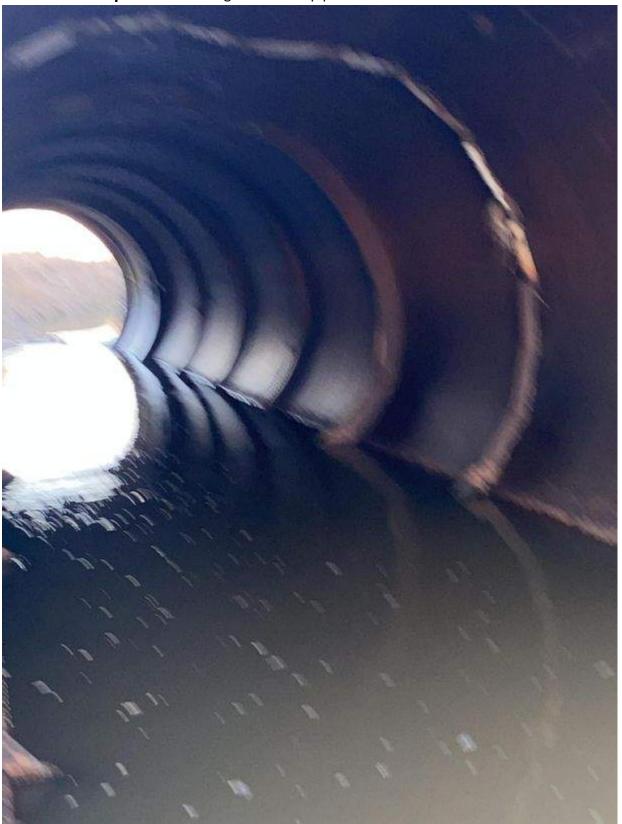

### PHOTO LOG OF ROADSIDE DITCH

### See Sheet 25 of 42 in Attachment C

INSPECTED BY: JCMarshall\_Garver INSPECTION DATE: 03/03/2021 LOCATION: -90.54432, 36.48116

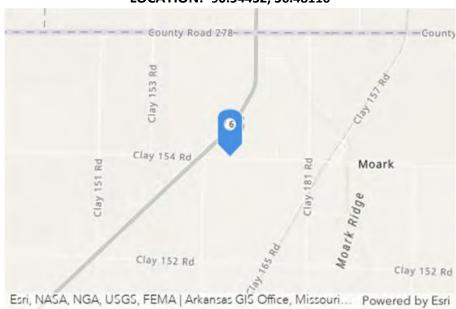



**LOCATION NOTES** 

CR 154



# Photo 1 Description: South



## Photo 2 Description: North





# Photo 3 Description: House to east





# Photo 4 Description: House to west





### Photo 5 Description: AG ditch






# Photo 6 Description: Fish



# **PHOTO LOG OF Visitor Center** See Sheet 25 of 42 of Attachment C

INSPECTED BY: JCMarshall\_Garver **INSPECTION DATE: 03/03/2021** LOCATION: -90.5474, 36.48332

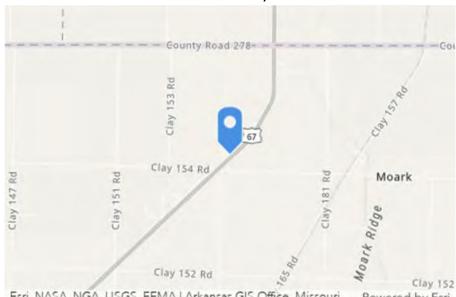

Esri, NASA, NGA, USGS, FEMA | Arkansas GIS Office, Missouri. Powered by Esri



**LOCATION NOTES** 



# Photo 1 Description: Facing west



Photo 2 Description: Downstream Face





# Photo 3 Description: 67 to west






# Photo 4 Description: 67 to east



### PHOTO LOG OF COUNTY ROAD

### See Sheet 25 of 42 in Attachment C

INSPECTED BY: JCMarshall\_Garver INSPECTION DATE: 03/03/2021 LOCATION: -90.53423, 36.49846

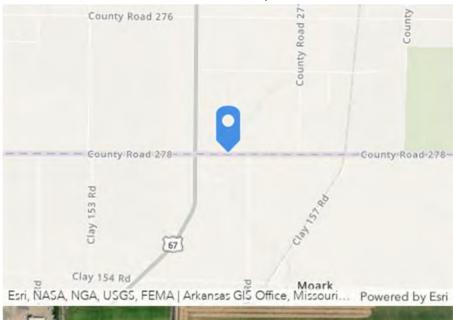



### **LOCATION NOTES**

State line rd.

## Photo 1 Description: Buildings to south (seem unoccupied)




Photo 2 Description: Downstream Face



### PHOTO LOG OF STREAM CROSSING (30W040)

### See Sheet 37 of 42 in Attachment C

INSPECTED BY: JCMarshall\_Garver INSPECTION DATE: 03/03/2021 LOCATION: -90.64501, 36.28077

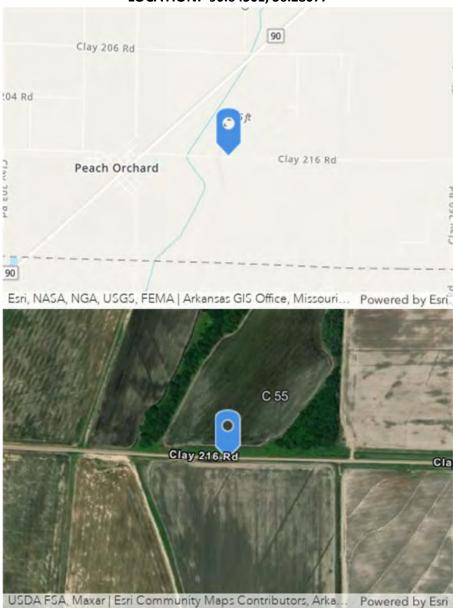

**LOCATION NOTES** 

CR 216



# Photo 1 Description: Southwest



Photo 2 Description: Northeast





# Photo 3 Description: Stream facing east






# Photo 4 Description: Vegetation



### PHOTO LOG OF STREAM CROSSING (30W045)

### See Sheet 38 of 42 in Attachment C

INSPECTED BY: JCMarshall\_Garver **INSPECTION DATE: 03/03/2021** LOCATION: -90.60561, 36.30887

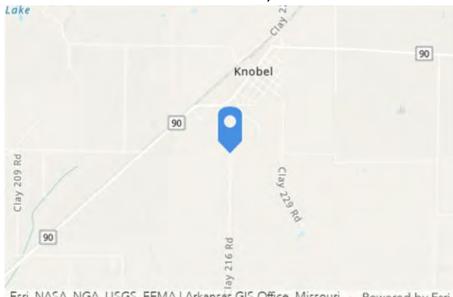

Esri, NASA, NGA, USGS, FEMA | Arkansas GIS Office, Missouri... Powered by Esri




**LOCATION NOTES** 


CR 216



## Photo 1 Description: Southwest

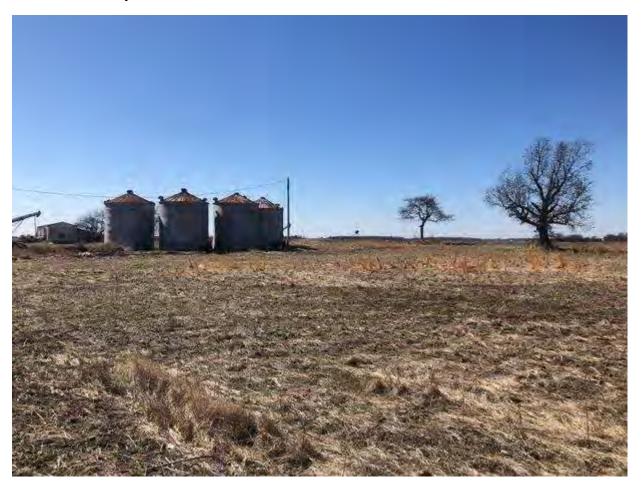


#### Photo 2 Description: Northeast

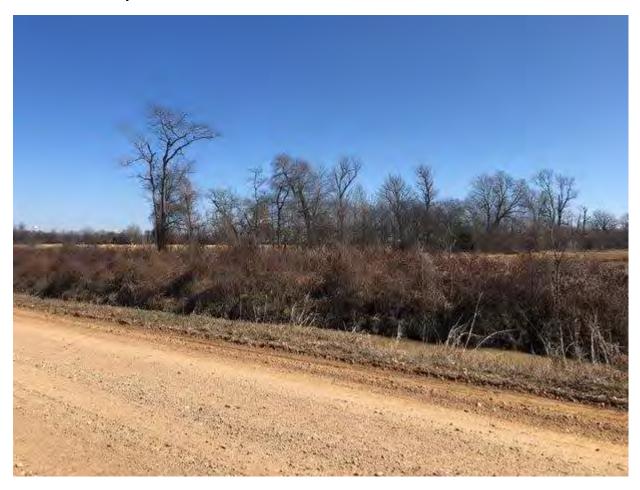




## Photo 4 Description: Stream facing north

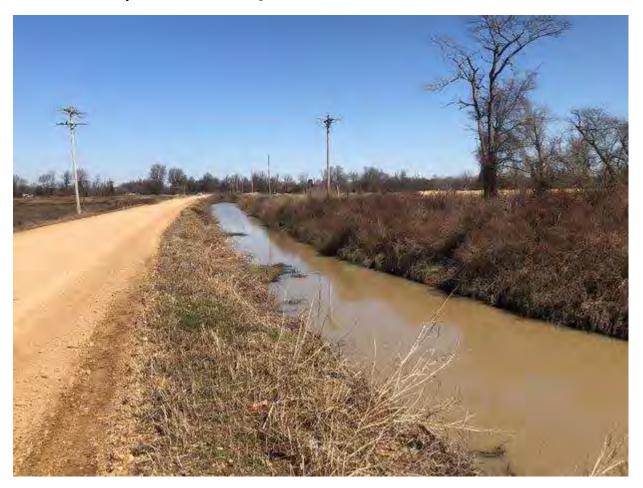




## Photo 5 Description: Stream facing south

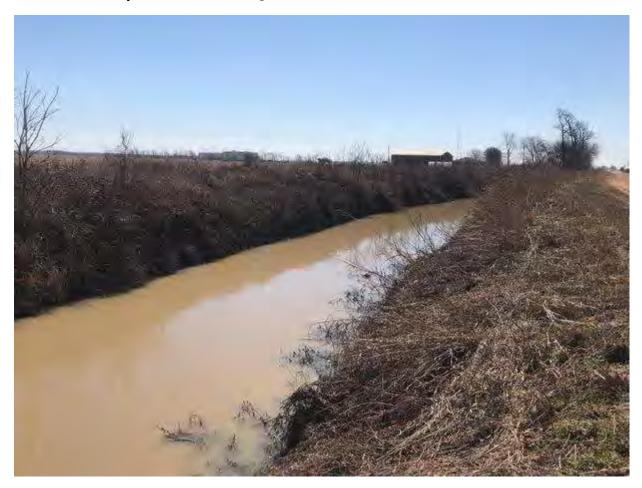

#### **PHOTO LOG OF STREAM CROSSING (30W050)**

#### See Sheet 39 of 42 in Attachment C

INSPECTED BY: JCMarshall\_Garver INSPECTION DATE: 03/03/2021 LOCATION: -90.58824, 36.32363

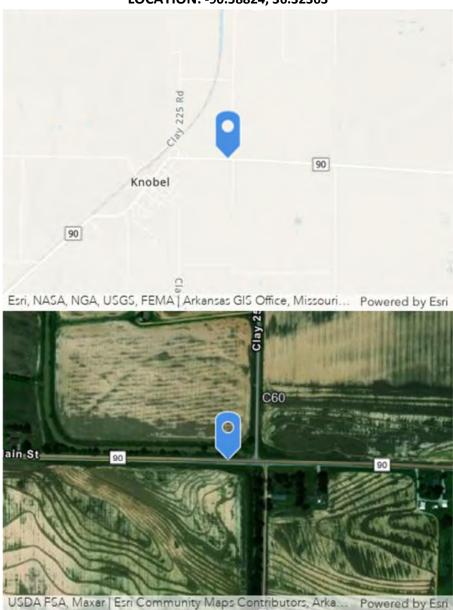

**LOCATION NOTES** 

Hwy 90



## Photo 1 Description: South



Photo 2 Description: North





## Photo 3 Description: Stream facing west upstream





## Photo 4 Description: Looking Downstream




#### **Future I-57 FEIS: Waters Technical Report**





# ATTACHMENT D — USGS 7.5-MINUTE TOPOGRAPHIC MAPS






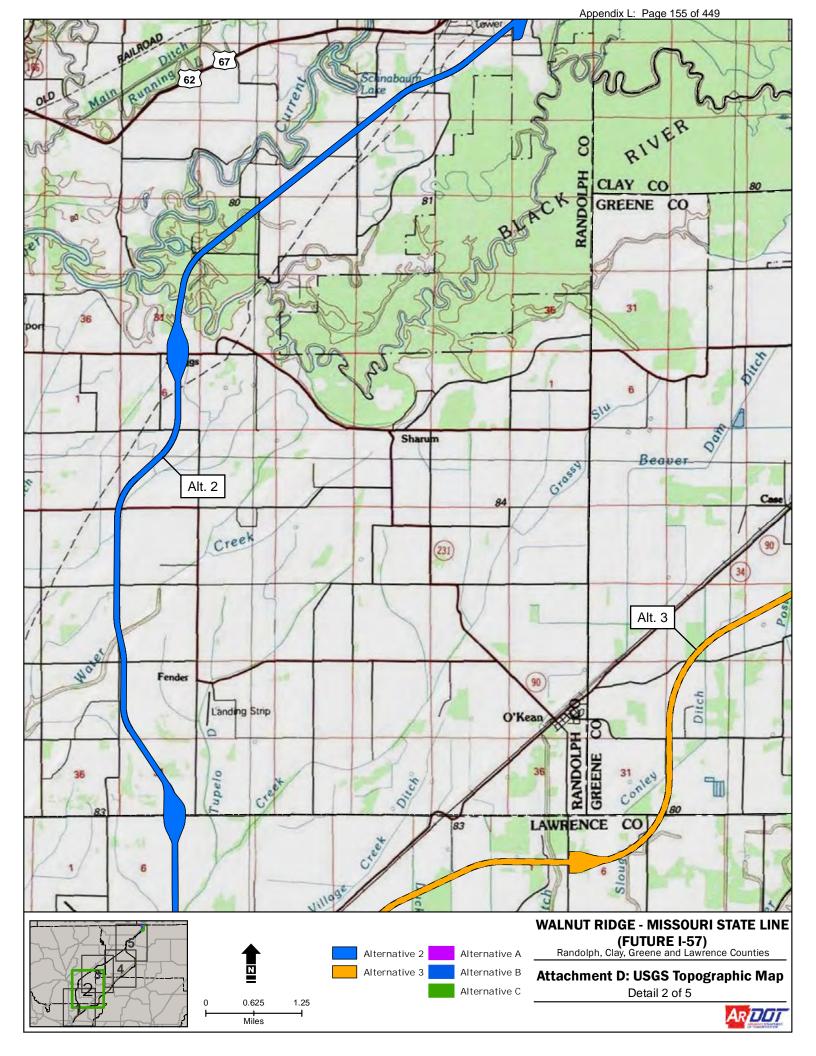

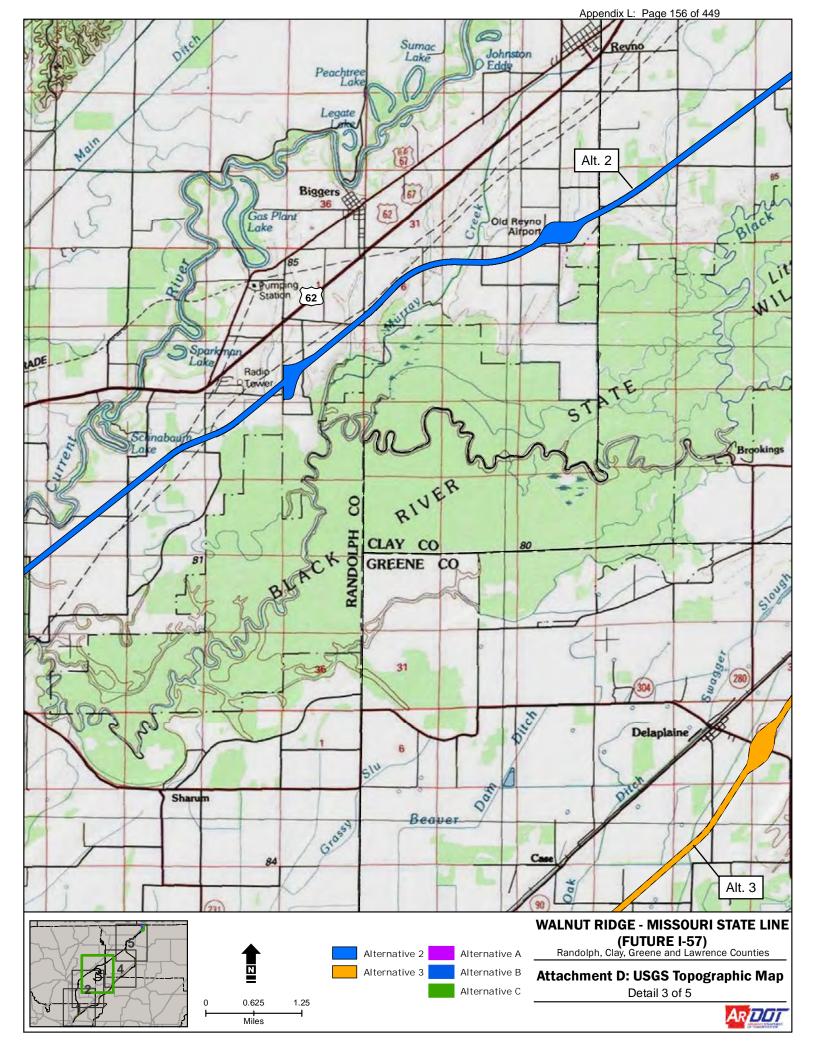

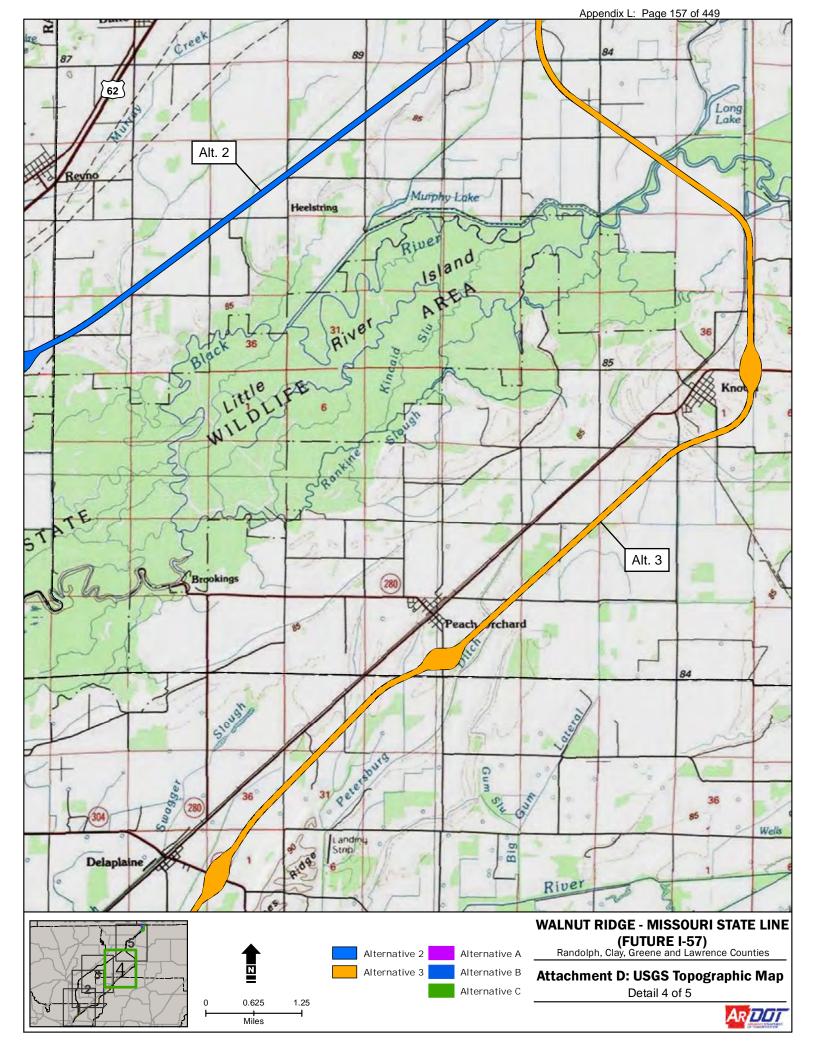

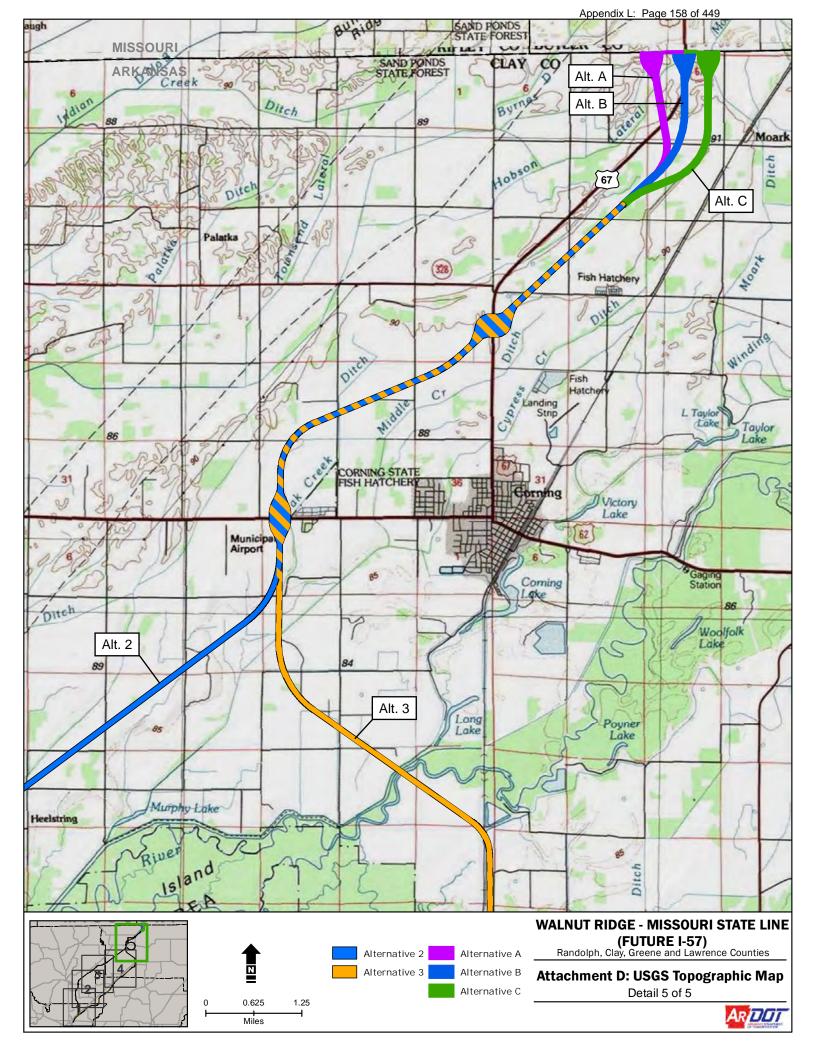

#### **Future I-57 FEIS: Waters Technical Report**



## ATTACHMENT E — CONCEPTUAL OTHER WATERS IMPACT TABLES



LF)																																					Ì			
Impacts (LF)	645	498	502	202	499	517	218	319	467	398	246	190	1,446	1,203	1,473	2,281	431	430	603	381	231	335	512	774	1,217	1,580	1,580	1,066	302	1,200	572	168	211	542	564	299				
Stream Classification	DNJ/EPH	DNJ/EPH	DNJ/EPH	INT	INT	INT	TNI	TNI	DNJ/EPH	INT	TNI/CNQ	LNI	DNJ/EPH	DNJ/EPH	INT	INT	TNI	DNJ/EPH	INT	INT	TNI/CNQ	TNI/CNQ	TNI	INT	TNI/CNQ	DNJ/EPH	DNJ/EPH	DNJ/INT	DNJ/EPH	INT	DNJ/INT	DNJ/EPH	DNJ/EPH	DNJ/EPH	DNJ/EPH	DNJ/EPH				
Longitude	-90.684670	-90.677337	-90.677206	-90.672992	-90.658524	-90.649242	-90.648064	-90.638610	-90.638745	-90.636206	-90.635224	-90.633790	-90.636030	-90.636444	-90.634333	-90.635936	-90.622051	-90.604096	-90.595456	-90.594793	-90.589735	-90.590675	-90.589336	-90.590117	-90.587662	-90.585648	-90.585390	-90.583629	-90.584854	-90.581068	-90.577181	-90.567414	-90.567484	-90.567393	-90.558367	-90.558225				
Latitude	36.368317	36.372636	36.372714	36.375402	36.383703	36.389201	36.389752	36.396899	36.397053	36.404093	36.407885	36.410757	36.411559	36.411769	36.413882	36.420448	36.431259	36.437042	36.440519	36.441006	36.443929	36.444017	36.444057	36.444974	36.447796	36.447356	36.447247	36.446541	36.449392	36.449816	36.453511	36.460091	36.460998	36.460552	36.467167	36.467263				
Other Waters (OW) Identification No.	20W94	2OW95	2OW96	20W97	2OW98	2OW99	2OW100	20W101	20W102	2OW103	20W104	20W105	2OW106	2OW107	2OW108	2OW110	20W111	20W112	20W113	20W114	20W115	20W116	20W117	20W119	20W120	20W121	20W122	20W123	20W124	20W125	20W126	20W127	2OW128	20W129	2OW130	20W131				
Impacts (LF)	512	631	514	571	470	631	503	505	126	120	463	496	167	2,006	728	269	512	143	581	551	280	575	405	401	876	1,473	202	455	854	851	602	499	498	495	207	394	620	588	183	643
Stream Classification	DNJ/EPH	Ł	INT	DNJ/EPH	INT	INT	DNJ/EPH	IN	PER	INT	LNI	LNI	TNI	DNJ/EPH	DNJ/EPH	DNJ/EPH	DNJ/EPH	DNJ/EPH	INT	DNJ/EPH	DNJ/EPH	DNJ/EPH	IN	INT	DNJ/EPH	DNJ/EPH	LNI	DNJ/EPH	DNJ/EPH	DNJ/EPH	EPH	LNI	TNI/CNQ	DNJ/EPH	DNJ/EPH	DNJ/EPH	DNJ/EPH	PER	TNI	DNJ/EPH
Longitude	-90.884110	-90.881334	-90.879335	-90.877982	-90.870407	-90.869032	-90.861385	-90.861258	-90.852362	-90.852212	-90.839652	-90.833969	-90.829312	-90.824765	-90.820109	-90.818717	-90.815303	-90.814921	-90.808755	-90.802880	-90.801019	-90.792021	-90.777729	-90.787400	-90.765735	-90.760106	-90.755404	-90.750753	-90.747760	-90.747564	-90.739530	-90.734604	-90.727781	-90.718417	-90.708873	-90.710109	-90.709562	-90.704132	-90.704331	-90.702840
Latitude	36.265333	36.267084	36.268326	36.269262	36.273866	36.274781	36.279572	36.279652	36.285788	36.285683	36.290130	36.293289	36.296841	36.299839	36.302587	36.303364	36.305412	36.305140	36.309389	36.313641	36.315162	36.320901	36.321498	36.321580	36.324603	36.326991	36.328307	36.330594	36.331846	36.331932	36.336023	36.338895	36.342944	36.348458	36.353611	36.353626	36.353726	36.356764	36.357126	36.357609
Other Waters (OW) Identification No.	20W52	20W53	20W54	20W55	20W56	20W57	20W58	20W59	2OW60	20W61	20W62	2OW63	20W64	20W65	20W66	20W67	2OW68	2OW69	2OW70	20W71	20W72	20W73	20W74	20W75	20W77	2OW78	2OW79	2OW80	2OW81	20W82	2OW83	20W84	2OW85	2OW86	2OW87	2OW88	2OW89	2OW90	20W91	20W92
	ı	ı					ı	1									ı	1					1		ı													_	_	
Impacts (LF)	102	445	494	142	354	204	0	400	0	418	1,413	363	470	486	736	370	1,255	893	399	2,549	391	496	115	641	2,835	400	1,191	487	401	661	401	406	292	467	256	412	1,479	1,475	412	609
Stream Classification	ΙΝΙ	ΙΝ	INT	DNJ/EPH	LNI	INT	DNJ/EPH	DNJ/EPH	DNJ/EPH	DNJ/EPH	PER	DNJ/EPH	DNJ/EPH	LNI	DNJ/EPH	INT	ΙΝ	PER	INT	TNI/CNQ	LNI	DNJ/EPH	DNJ/EPH	DNJ/EPH	DNJ/EPH	DNJ/EPH	DNJ/EPH	INT	DNJ/EPH	INT	DNJ/EPH	DNJ/EPH	EPH	TNI/CNQ	DNJ/EPH	DNJ/EPH	LNI	INT	PER	DNJ/EPH
Longitude	-90.932933	-90.926326	-90.921580	-90.922079	-90.921231	-90.921821	-90.911333	-90.911721	-90.912110	-90.908094	-90.905571	-90.905571	-90.906090	-90.906231	-90.905715	-90.906240	-90.905527	990906.06-	-90.905925	-90.905253	-90.905901	-90.905214	-90.905204	-90.905205	-90.905189	-90.917262	-90.918033	-90.918163	-90.918661	-90.918251	-90.918050	-90.918004	-90.911307	-90.909456	-90.908177	-90.904449	-90.903891	-90.903896	-90.902956	-90.897897
Latitude	36.070046	36.080726	36.087491	36.087608	36.087612	36.087890	36.093831	36.094280	36.094730	36.096855	36.101306	36.103860	36.104123	36.104316	36.105800	36.113063	36.114930	36.123366	36.131453	36.135116	36.138948	36.139607	36.140582	36.141699	36.146540	36.179594	36.182767	36.184432	36.194264	36.204375	36.208675	36.208813	36.216081	36.217418	36.218353	36.223318	36.237686	36.237839	36.248354	36.256665
Other Waters (OW) Identification No.	20W2	20W4	20W5	20W6	20W7	20W8	20W9	20W10	20W11	20W12	20W15	20W17	20W18	20W20	20W22	20W24	20W25	20W26	20W27	20W28	20W29	2OW30	20W31	20W32	20W33	20W35	2OW36	20W37	2OW38	2OW39	2OW40	20W41	20W42	20W43	20W44	20W45	20W46	20W47	20W48	2OW49

ALTERNATIVE 2 - CONCEPTUAL OTHER WATERS IMPACTS

ALTERNATIVE 3 - CONCEPTUAL OTHER WATERS IMPACTS
/dWI
ERS.
WAT
'HER
10 01
PTU/
NCE
٠ د
: INE
RNAT
ALTE
_

Other Waters (OW)	Latitude	Longitude	Stream	Impacts (LF)	Other Waters (OW)	Latitude	Longitude	Stream	Impacts (LF)	Other Waters (OW)	Latitude	Longitude	Stream	Impacts
30W1	36.06907486	-90.93477326	EPH	700	30W54	36.19771915	-90.7501427	INT	572	30W107	36.32350493	-90.58834775	DNJ/EPH	300
30W2	36.07004602	-90.93293334	DNJ/EPH	102	30W55	36.19777683	-90.75005961	DNJ/EPH	572	30W108	36.3237424	-90.58790465	DNJ/EPH	40
30W3	36.07203288	-90.93161727	DNJ/EPH	109	30W56	36.20027642	-90.74645915	DNJ/EPH	613	30W109	36.33810664	-90.58822358	INT	401
30W4	36.08072619	-90.92632611	INI	445	30W57	36.20036653	-90.74627	INI	591	30W110	36.34467946	-90.58816679	PER	402
30W5	36.08749011	-90.92213112	TNI	168	30W58	36.20331815	-90.74207736	INT	552	30W111	36.35035289	-90.58900598	PER	1032
30W6	36.08749272	-90.92129517	ЕРН	326	30W59	36.20747782	-90.73536893	INT	173	30W112	36.35126552	-90.58948508	DNJ/EPH	784
30W7	36.08761161	-90.92123066	LNI.	354	30W60	36.20771704	-90.73573982	PER	612	30W113	36.35527467	-90.59474864	DNJ/EPH	486
30W8	36.08765035	-90.92183617	EPH	346	30W61	36.21079385	-90.73139861	PER	622	30W114	36.35714432	-90.59793305	DNJ/EPH	487
30WJ0	36.09428048	-90.91172138	DNI/EPH	400	30W62	36.21508527	-90.72619351	DNI/EPH	716	30W116	36.36073867	-90.60405553	DNI/EPH	488
30W11	36.09625417	-90.9075793	DNJ/EPH	115	30W64	36.22252098	-90.72010354	DNJ/EPH	484	30W117	36.360857	-90.60425709	DNJ/EPH	476
30W12	36.09670493	-90.90796466	DNJ/EPH	285	30W65	36.22260484	-90.72003512	DNJ/EPH	486	30W118	36.36336165	-90.6084675	PER	421
30W13	36.09702693	-90.90823994	DNJ/EPH	1	30W66	36.22604088	-90.71693636	INT	841	30W119	36.36381149	-90.60929018	PER	422
30W14	36.09792418	-90.90558108	PER	496	30W67	36.22626112	-90.71740565	DNJ/EPH	288	30W120	36.36802539	-90.61646961	INT	673
30W15	36.10196447	-90.8987414	EPH	635	30W68	36.22623385	-90.71540673	DNJ/EPH	2177	30W121	36.37158643	-90.6225373	INT	489
30W17	36.10596753	-90.89201561	IN	493	30W70	36.22942371	-90.71443719	DNJ/EPH	1491	30W123	36.3751777	-90.62864119	INT INT	654
30W18	36.11418208	-90.87816982	PER	512	30W71	36.2294562	-90.71403126	DNJ/EPH	1283	30W124	36.38266031	-90.63556585	IN	424
30W19	36.11551527	-90.87591863	PER	619	30W72	36.22965785	-90.7124347	LNI	3148	30W125	36.38917132	-90.63665096	PER	539
30W20	36.11713919	-90.87319451	DNJ/EPH	486	30W73	36.23201718	-90.71200272	DNJ/EPH	1554	30W126	36.38973501	-90.63670006	INT	364
30W21	36.12063941	-90.86897026	DNJ/EPH	614	30W74	36.23823328	-90.70723226	INI	495	30W127	36.39690738	-90.63642028	DNJ/EPH	400
30W22	36.1207564	-90.86886575	DNJ/EPH	631	30W75	36.2455569	-90.69829919	DNJ/EPH	185	30W128	36.39711516	-90.63641436	DNJ/EPH	401
30W23	36.12225911	-90.86739407	DNJ/EPH	485	30W76	36.2455969	-90.69819153	DNJ/EPH	148	30W129	36.40408617	-90.63552669	IN	1 2
30W24	36.12242373	-90.86723285	DNJ/EPH	482	30W77	36.24570841	-90.69866408	LNI.	5/1	30W130	36.40409322	-90.63620582	INI	398
30W25	36.12559255	-90.86415336	PER	420	30W/8	36.25009502	-90.69321374	INI .	5/4	30W131	36.40788528	-90.6352239	INI/INI	246
30W26	36.1293873	-90.86060739	DNJ/EPH	373	30W79	36.25757794	-90.6838972	DNJ/EPH	572	30W132	36.41075713	-90.63378955	LNI	790
30W27	36.13491737	-90.85055982	PER	440	30W80	36.25980994	-90.6811225	TNI/IND	623	30W133	36.41155944	-90.63603031	DNJ/EPH	1446
30W28	36.13638531	-90.84663065	DNJ/EPH	903	30W81	36.26644394	-90.6/01324	N	38/	30W134	36.411/6929	-90.63644428	DNJ/EPH	120:
30W29	36.13827626	-90.84147947	N F	441	30W82	36.26982226	-90.66103868	DNI/EPH	1488	30W135	36.41388168	-90.63433251	TN F	1473
30W31	36.13970237	-90.83759464	DNI/FPH	976	30W84	36.27759801	-90.64940393	INT INT	407	30W137	36.43125876	-90.62205338	ž V	431
30W32	36.14091332	-90.83209565	LNI	401	30W85	36.27768454	-90.64928613	DNJ/EPH	406	30W138	36.43704221	-90.60409573	DNJ/EPH	430
30W33	36.14079218	-90,81701921	N	427	30W86	36.27818857	-90.64858139	DNJ/EPH	579	30W139	36.44051855	-90.59545646	N	603
30W34	36.14073943	-90.81413571	DNJ/EPH	400	30W87	36.28087804	-90.64484876	PER	587	30W140	36.44100612	-90.59479292	IN	381
30W35	36.14073702	-90.81400168	DNJ/EPH	1480	30W88	36.28134135	-90.6436892	DNJ/EPH	1328	30W141	36.44392905	-90.58973477	INT	231
30W36	36.14084159	-90.80930561	DNJ/EPH	1011	30W89	36.28919863	-90.63329862	INT	546	30W142	36.44401739	-90.59067493	INT	335
30W37	36.14266194	-90.79999722	INT	205	30W90	36.29389383	-90.62676474	ЕРН	520	30W143	36.44405697	-90.58933589	INT	512
30W38	36.1460342	-90.79550875	DNJ/EPH	685	30W91	36.29857017	-90.62028916	DNJ/EPH	507	30W144	36.44498912	-90.59019394	LN F	594
SOWS	36.14610923	90.79363072	INI (FBF	915	30,4/92	30.23006239	-90.0201533	DNJ/EPH	312	30W145	26.005.44	-90.39011040	E E	10/
30W41	36.14968005	-90.79241841	DNJ/EPH	438	30W94	36.29954277	-90.61893835	DNJ/EPH	540	30W147	36.44735592	-90.58564819	DNJ/EPH	1580
30W42	36.15166884	-90.79137434	DNJ/EPH	1066	30W95	36.30182617	-90.61576405	TNI/IND	672	30W148	36.44724668	-90.58538992	DNJ/EPH	158
30W43	36.15739969	-90.79053985	LNI	541	30W96	36.3047306	-90.61170552	LNI	673	30W149	36.44647772	-90.58363858	DNJ/INT	1047
30W44	36.17129994	-90.7895655	DNJ/EPH	411	30W97	36.30870907	-90.60540708	PER	452	30W150	36.44939239	-90.58485447	ЕРН	302
30W45	36.17482872	-90.78799027	DNJ/EPH	438	30W98	36.30932104	-90.60424242	INI	998	30W151	36.44981604	-90.58106821	INT	1200
30W46	36.17843522	-90.78533441	DNJ/EPH	492	30W99	36.31011213	-90.60192066	LNI	404	30W152	36.45351147	-90.57718107	DNJ/INT	572
30W47	36.17855054	-90.78522802	DNJ/EPH	494	30W100	36.31164007	-90.59670803	LN.	426	30W153	36.46009078	-90.56741367	DNJ/EPH	168
30W48	36.18164433	-90.78170156	TNI	544	30W101	36.31168765	-90.59654606	DNJ/EPH	428	30W154	36.46099844	-90.56748372	DNJ/EPH	211
30W49	36.18349599	-90.77989866	TNI/IND	2005	30W102	36.31210838	-90.59501014	DNJ/EPH	726	30W155	36.46055173	-90.56739282	DNJ/EPH	542
30W50 30W51	36.18623408	-90.77247477	INT	457	30W103	36.31460095	-90.59061512	DNJ/EPH FPH	512	30W156 30W157	36.46716707	-90.55836677	DNJ/EPH	564
30W51	36.19007664	-90.76328074	DNJ/EPH PFR	454	30W105	36.31567513	-90.58964496 -90 58849043	DNI/FPH	41/	)CTMOC	30.40720203	-70.33622472	DINJ/EFF	'n
30W53	36.19320975	-90.75667504	DNJ/EPH	809	30W106	36.32283927	-90.58767686	PER PER	2649					

Other Waters (OW)			Stream	
Identification No.	Latitude	Longitude	Classification	Impacts (LF)
identification No.	Δ	LTERNATIVE		
AOW1	36.470328	-90.553673	DNJ/EPH	616
AOW2	36.471252	-90.553674	DNJ/EPH	42
AOW3	36.474094	-90.548719	DNJ/EPH	560
AOW4	36.479350	-90.544390	DNJ/EPH	1,286
AOW5	36.481126	-90.544314	DNJ/EPH	399
AOW6	36.481242	-90.544319	DNJ/EPH	400
AOW7	36.484268	-90.545457	DNJ/EPH	60
AOW8	36.484553	-90.545512	DNJ/EPH	61
AOW9	36.484666	-90.544932	DNJ/EPH	363
AOW10	36.484945	-90.544986	DNJ/EPH	360
AOW11	36.485335	-90.544460	DNJ/EPH	60
AOW11	36.498408	-90.542699	DNJ/EPH	1,407
AOW12	36.485391	-90.544385	DNJ/EPH	0
AOW12	36.498533	-90.543238	DNJ/EPH	1,134
AOW13	36.488411	-90.545662	DNJ/EPH	405
AOW14	36.494989	-90.547335	INT	847
AOW15	36.498425	-90.547380	DNJ/EPH	1,345
		LTERNATIVE	В	
BOW1	36.477568	-90.544439	DNJ/EPH	582
BOW2	36.481052	-90.541772	DNJ/EPH	429
BOW3	36.481158	-90.541711	DNJ/EPH	429
BOW12	36.490557	-90.540516	DNJ/EPH	281
BOW13	36.492263	-90.539749	DNJ/EPH	2,008
BOW14	36.493069	-90.540024	DNJ/EPH	1,462
BOW15	36.495074	-90.539609	DNJ/EPH	379
BOW16	36.495505	-90.539704	DNJ/EPH	322
BOW17	36.496614	-90.541400	INT	1,340
BOW18	36.498410	-90.541979	DNJ/EPH	347
BOW19	36.498412	-90.540847	DNJ/EPH	319
		LTERNATIVE		
COW3	36.470489	-90.553686	DNJ/EPH	514
COW4	36.473988	-90.544711	DNJ/EPH	1,023
COW5	36.476999	-90.538380	INT	2,515
COW6	36.480871	-90.535422	DNJ/EPH	417
COW7	36.480963	-90.535382	DNJ/EPH	415
COW8	36.491711	-90.534505	DNJ/EPH	398
COW9	36.496390	-90.533630	INT	1,512
COW9.5	36.498562	-90.534437	INT	703
COW10	36.498408	-90.533363	DNJ/EPH	604
COW11	36.498536	-90.532573	INT	468

#### **Future I-57 FEIS: Waters Technical Report**



# ATTACHMENT F — CONCEPTUAL WETLAND IMPACT TABLES



ALTERNA	ALTERNATIVE 2 - CONCEPTUAL WETLAND IMPACTS	EPTUAL WET	LAND IMPACT	S	ALTERNA	NATIVE 3 - CONCEPTUAL WETLAND IMPACTS	EPTUAL WET	LAND IMPACT	S	ALTERNA	ALTERNATIVE A - CONCEPTUAL WETLAND IMPACTS	EPTUAL WEI	ILAND IMPACT	S
Wetland (W)	Latitude	Longitude	Cowardin Classification	Impacts (acres)	Wetland (W)	Latitude	Longitude	Cowardin Classification	Impacts (acres)	Wetland (W)	Latitude	Longitude	Cowardin Classification	Impacts (acres)
2W000.5	36.069065	-90.934797	PEM		3W001	36.070455	-90.932709	PEM	0.98	AW001	36.470766	-90.553046	PFO	2.78
2W001	36.070407	-90.932731	PEM	06:0	3W002	36.072423	-90.931368	PEM	0.54	AW002	36.474850	-90.547246	PEM	0.31
2W001.5	36.072030	-90.931602	PEM	0.03	30003	36.141147	-90.821926	PFO	0.61	AW003	791347.116418 -90.542054	-90.542054	PUB	0.12
2W002	36.072557	-90.931272	PEM	0.63	3W004	36.140775	-90.816995	PFO	1.35	AW004	791332.560939 -90.542018	-90.542018	PEM	0.30
2W003	36.102839	-90.906346	PFO	2.55	30005	36.152705	-90.790788	PFO	1.09					
2W003	36.103707	-90.906029	PFO	0.21	300008	36.190547	-90.762188	PFO	6.65	ALTERNA	ALTERNATIVE B - CONCEPTUAL WETLAND IMPACTS	EPTUAL WET	<b>ILAND IMPACT</b>	·O
2W004	36.185420	-90.917984	PEM	0.29	30007	36.229666	-90.712165	PFO	2.50	BW001	36.470766	-90.553046	PFO	2.78
2W004.5	36.207960	-90.917513	PFO	0.26	30008	36.248230	-90.694694	PFO	0.77	BW002	36.474850	-90.547246	PEM	0.31
2W005	36.207691	-90.917649	PEM	92.0	3W009	36.250519	-90.693429	PFO	0.40	BW003	36.487275	-90.540194	PFO	7.22
20008	36.240647	-90.903864	PFO	4.72	3W010	36.266107	-90.670845	PSS	2.89					Ī
2W8.5	36.239564	-90.905693	PEM	0.94	3W011	36.266866	-90.670504	PUB	0.20	ALTERNA	ALTERNATIVE C - CONCEPTUAL WETLAND IMPACTS	EPTUAL WEI	<b>ILAND IMPACT</b>	"
2W009	36.247403	-90.903139	PFO	4.73	3W012	36.266658	-90.670106	PEM	0.43	CW001	36.470504	-90.553040	PFO	1.02
2W9.5	36.267113	-90.881411	PFO	80.0	3W013	36.281955	-90.643031	PFO	1.86	CW002	36.477870	-90.536802	PFO	1.05
2W9.5	36.268292	-90.879380	PFO	0.10	3W014	36.293918	-90.626604	PFO	69.0					Ī
2W010	36.285875	-90.851446	PFO	5.36	3W015	36.310026	-90.601742	PFO	0.32					
2W011	36.285610	-90.850926	PEM	0.77	3W016	36.310058	-90.601048	PFO	1.11					
2W012	36.286808	-90.850642	PEM	80.0	3W017	36.336109	-90.588821	PUB	0.40					
2W013	36.290177	-90.839505	PFO	1.84	3W018	36.344470	-90.588637	PFO	0.28					
2W013.5	36.290566	-90.839562	PSS	0.40	3W019	36.345406	-90.588584	PFO	1.28					
2W014	36.293277	-90.834533	PFO	66.0	3W020	36.363506	-90.608825	PFO	0.77					
2W015	36.321685	-90.782138	PFO	3.77	3W021	36.428224	-90.631386	PFO	90.0					
2W016	36.321560	-90.777696	PEM	0.40	3W022	36.448669	-90.584711	PUB	0.25					
2W16.5	36.330509	-90.749986	PFO	0.24										
2W017	36.336298	-90.738829	PFO	3.21										
2W17.5	36.336749	-90.738061	PSS	0.32										
2W017.8	36.339705	-90.734344	PEM	0.35										
2W018	36.356587	-90.704518	PFO	1.11										
2W019	36.356792	-90.703759	PFO	0.39										
2W021	36.428224	-90.631386	PFO	90.0										
2W21.3	36.445067	-90.590154	PFO	0.87										
2W21.5	36.445254	-90.590037	PEM	0.17										
2W022	36.448669	-90.584711	PUB	0.25										